


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

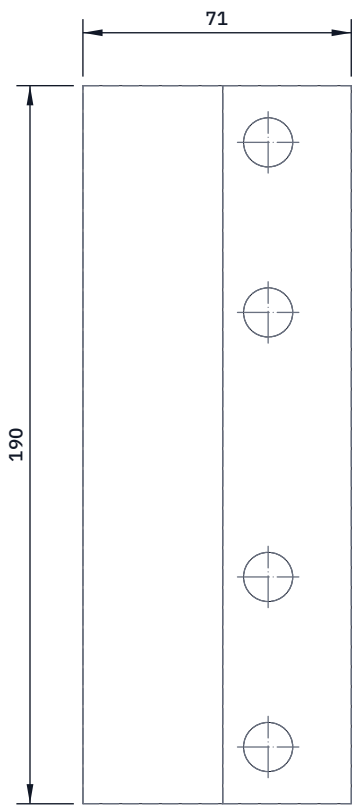

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

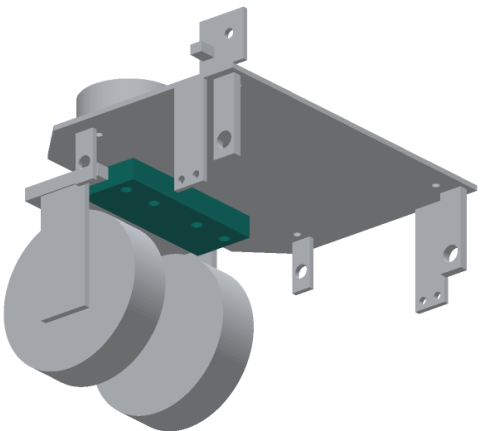

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Jaw: 10 mm steel, 71 x 190 mm.

Packing bar: 34 mm wide, 190 long, as thick as the jack's yoke plate less 1 mm (14 mm for the 15 mm plate drawn). Measure the yoke first.

Weld the packing bar on top of the jaw along its back edge, ends flush.

Drill four 13 mm holes through both, 49 mm from the jaw's front edge, 35 and 80 mm each side of the centre line (drill with the top plate clamped on, so the holes line up).

Fit: the jaw goes under the yoke plate's back edge, the packing bar behind it, 2 mm clear of the edge. Four M12 bolts from below, nuts on the top plate: the yoke plate is gripped between the jaw and the top plate, with no hole drilled in the jack.

Check: with the bolts snug the jaw sits flat under the yoke plate.

PALLETPILOT			github.com/BoujeeEnjinia1701/palletpilot		
PalletPilot lower jaw and packing bar: making sketch					
DRAWING NO. PLP-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 10 mm; steel flat bar 34 x 15 mm (to suit the yoke)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					