


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

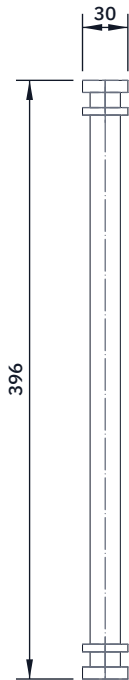


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

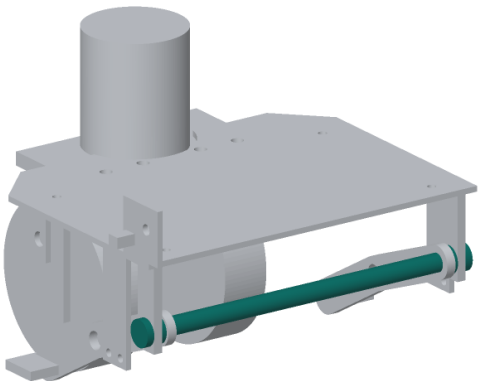

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Pin: 20 mm bright steel bar, 392 mm long. Thread both ends M20 for 25 mm. Grease it before fitting.

Spacers: two tubes 30 mm outside, 20 mm bore, 5 mm long.

Order along the pin, from the left end: nut, left rear hanger, spacer, left arm, (open span), right arm, spacer, right rear hanger, nut.

The arms must turn freely on the pin; the nuts clamp the hangers only.

Use nyloc nuts or a split pin through each end.

Check: each arm swings by hand through its full travel.

PALLETPILOT

github.com/BoujeeEnjinia1701/palletpilot

PalletPilot arm pivot pin, spacers and nuts: making sketch

DRAWING NO. PLP-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bright steel bar 20 mm; steel tube 30 x 5 mm; M20 nuts					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	