



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

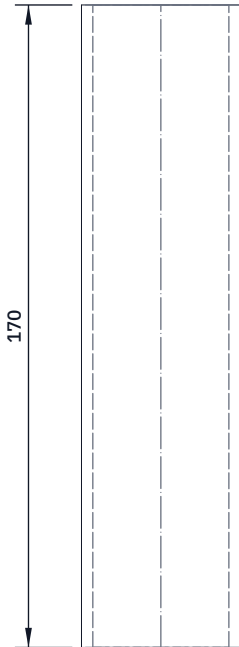

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

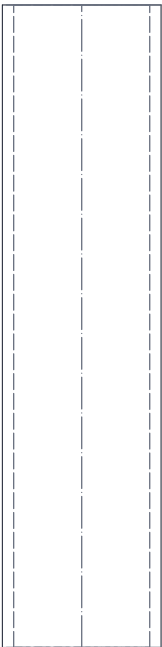

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 170 mm of 42 mm OD PVC pressure pipe with a fine-tooth saw in a mitre box, so both ends are square to within 0.5 mm.

Deburr inside and out; chamfer the outside of the bottom end 1 mm.

Abrade 26 mm of the outside at the top (into the head socket) and 15 mm of the inside at the bottom (over the fin spigot) with 120 grit.

Fit: the bottom end sits on the fin collar, glued over the spigot; the top end goes 24 mm into the head socket, 2 mm short of its floor.

Check: the head socket slides over the tube by hand with about 0.5 mm all round for the epoxy; the spigot slides into the tube.

RootMesh stake tube: making sketch

DRAWING NO. RMS-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PVC pressure pipe, 42 mm OD (40 mm or 1-1/4 in nominal)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand