


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

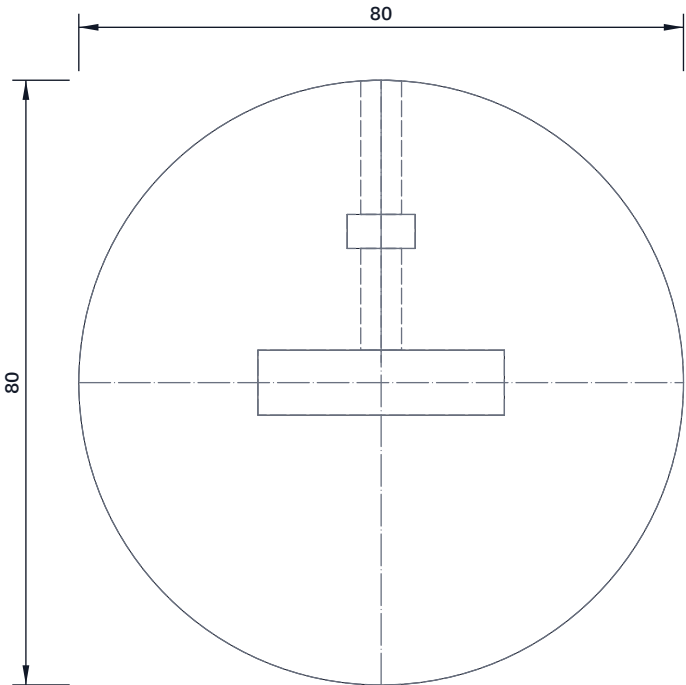

FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Disc 80 dia x 15 thick with a 32.6 x 8.6 slot through the centre.

M5 thumb screw hole 5.4 dia from the edge to the slot, on the centre line, 7.5 up; a slot for an M5 nut 20 mm from centre, open at the top, so the nut drops in and the screw threads through it.

Fit: slides on the blade; the thumb screw clamps it on the blade's wide face, with its top face at the 485 mm mark.

In use it rests on the soil beside the 50 mm auger hole and stops the point at 485 mm below grade, the depth of the electrode tips.

Check: it slides on the blade without rocking, and one finger-tight turn of the thumb screw holds it under a firm pull.

ROOTMESH

github.com/BoujeeEnjinia1701/rootmesh

RootMesh slot tool depth stop: making sketch

DRAWING NO.

RMS-DWG-110

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:1

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

ASA, 3D printed flat, 100 % infill