
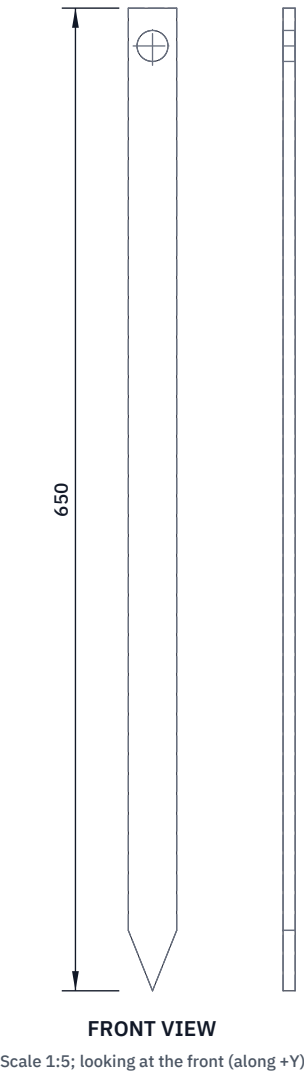


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



HOW TO MAKE IT AND HOW IT FITS

Blade: cut 650 mm of 32 x 8 mm flat bar. Grind one end to a point 40 long (the full 32 width tapering to the centre). Chamfer the struck top end 1 mm so it does not mushroom into sharp burrs. Drill a 20.5 mm cross hole on the centre line, 25 mm below the top end (pilot 6 mm, then step up; clamp the bar in a vice). Handle: cut 250 mm of 20 mm round bar; chamfer both ends. Fit: handle through the hole, centred; a 20 mm shaft collar each side against the blade, set screws tight on the bar. Mark the blade 485 mm up from the point: the stop's top face goes there when set for the stake. Check: blade straight within 2 mm; point on the centre line.

ROOTMESH				github.com/BoujeeEnjinia1701/rootmesh			
RootMesh slot tool blade and handle: making sketch							
DRAWING NO. RMS-DWG-109			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES Mild steel flat bar 32 x 8 mm; round bar 20 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	