



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

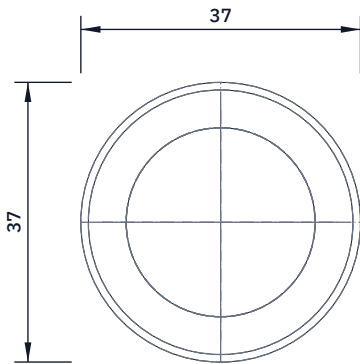


TOP VIEW

Scale 1:1; looking down (along -Z)

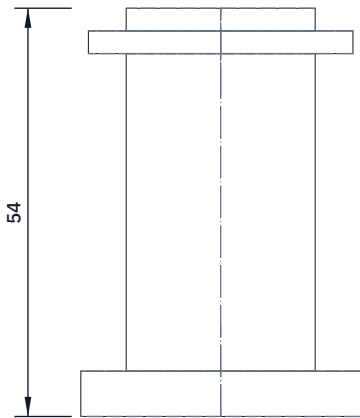


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

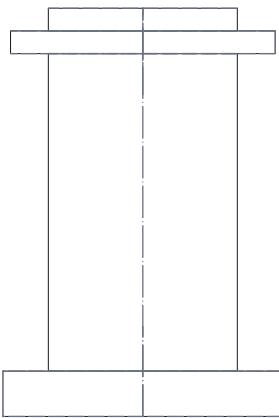

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

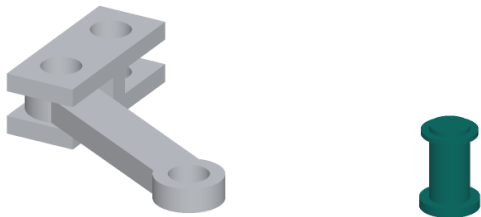

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Four pins 25 mm ground, each with a 37 mm head 6 mm thick.
- Two for the crosshead: 48 mm under the head (drawn).
- Two for the arm tails: 44 mm under the head.
- Circlip groove for a 25 mm external circlip, 3 to 6 mm from the plain end; washer under each circlip.
- Chamfer the plain end 1 mm.
- Check: each pin passes its link and bores with no force.

RUBBLEJACK

github.com/BoujeeEnjinia1701/rubblejack

RubbleJack link pin (make 4): making sketch

DRAWING NO. RBJ-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 4340 steel bar, quenched and tempered to about 300 HB					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand