


CONCEPT, NOT FOR FABRICATION

SaltDrag · github.com/BoujeeEnjinia1701/saltdrag


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	SDG-DDR-002: design for construction	2026-10-03	AC

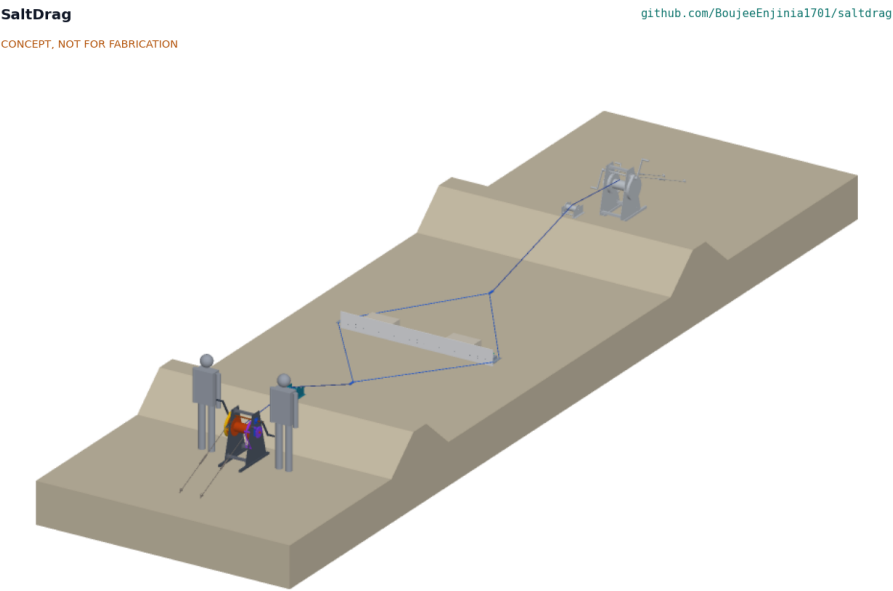

Seen from the front right and above, 24 deg elevation. Grey: bunds and ground, far-side capstan and roller, two 1.75 m people at the cranks for scale

WORKING LAYOUT

Seen from the front right and above; pan shortened to 7 m

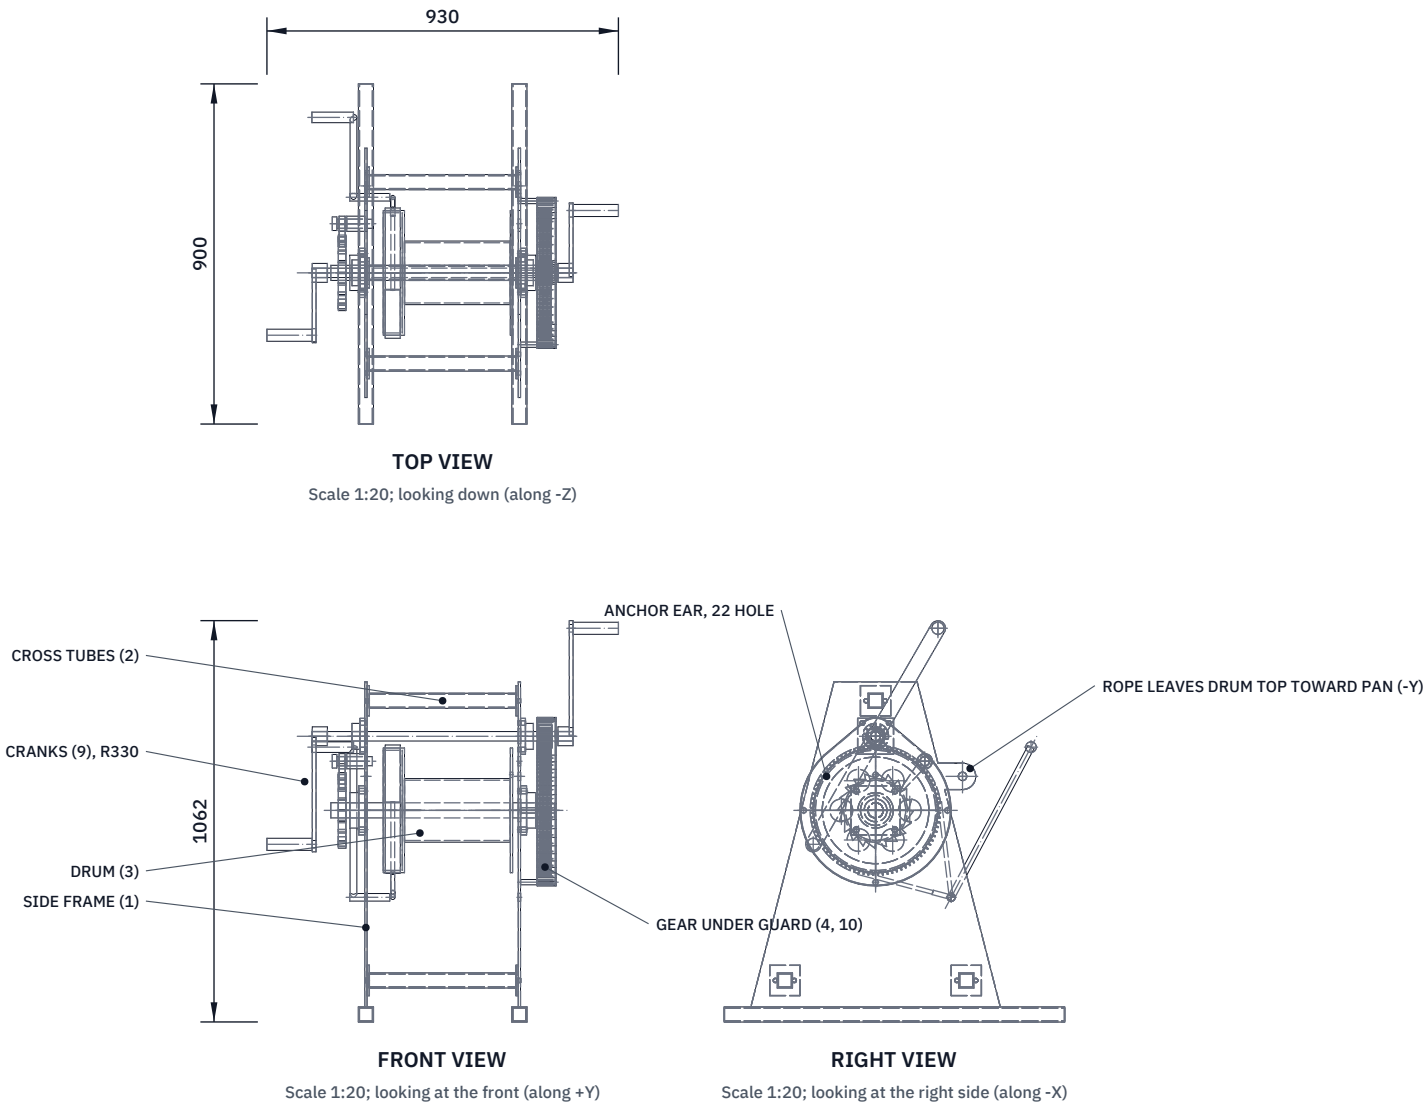

MAIN DIMENSIONS AND INTERFACES (MM)

Gear pair module 4, 84 and 14 teeth, ratio 6:1, centres 196
Drum barrel 168.3 OD x 280; flanges 330; shaft 40 C45
Rope 12 polyester; 58 m in 4 layers; freeboard 38
Bearings 4-bolt flange, 40 and 25 bore, stainless insert
Ratchet 200 OD, 20 teeth; pawl on 40 boss; band brake on 330 rim
Side frames 6 plate on 40 SHS runners 900 long, 406 apart
Anchors: 2 chains from ears to helical anchors 1700 behind
Rake: FRP 100 x 100 x 6 beam 3,000; UHMW blade 300 tall
Rake: blade edge 10 above floor on 3 skids (5 to 25)
Bridles from end-cap eyes; apex 2,000 ahead of blade
Bund roller 100 x 200 UHMW, top 150 above crest
Capstan drum 1,500 behind the crest centre
Drum axis 560 and crank axis 756 above the ground
Third-angle; front view from the pan side; (n) = BOM line

SALTDRA

github.com/BoujeeEnjinia1701/saltdrag

Hand capstan and rake set: general arrangement

DRAWING NO. SDG-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Galvanised steel capstan; FRP and UHMW-PE rake; per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	