


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

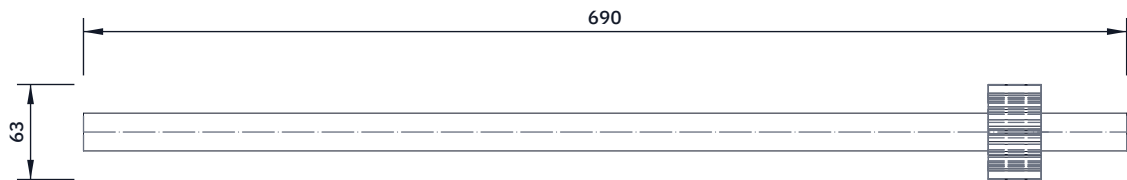

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

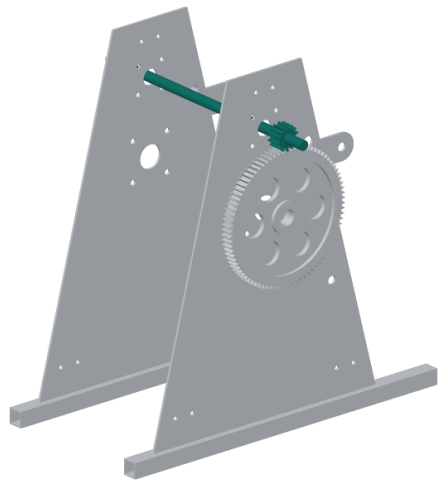

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 2. Shaft: C45 bright bar 25 mm, 690 long, ends chamfered.

Keyway 8 mm wide, 40 long, for the pinion, from 253 to 289 mm right of the shaft middle.

Cross-pin holes 8 mm through, 20 mm in from each end, for the crank hub pins.

Pinion: bought, module 4, 14 teeth, 35 face, bored 25, keyed and held by a set screw. Its teeth line up with the gear's face.

Fit: the shaft runs in two 25 mm flange bearings on the cheeks, 756 mm above the ground and 196 mm above the drum centre.

The pinion sits outside the right bearing, inside the guard.

Check: the shaft turns by hand in its bearings with the pinion meshing the gear; a feeler shows backlash of 0.2 to 0.5 mm.

SALTDRAW				github.com/BoujeeEnjinia1701/saltdrag			
SaltDrag crank shaft with pinion (make 2): making sketch							
DRAWING NO. SDG-DWG-104			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES C45 (EN8) bright bar 25 mm; bought pinion, module 4, 14 teeth							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	