REV	DESCRIPTION	DATE	BY
P1	First making sketch (SDG-DDR-002)	2026-10-03	AC
P2	SDG-DEC-001 D17 to D24: STEM check fixes, kit 1.9.1	2026-10-24	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

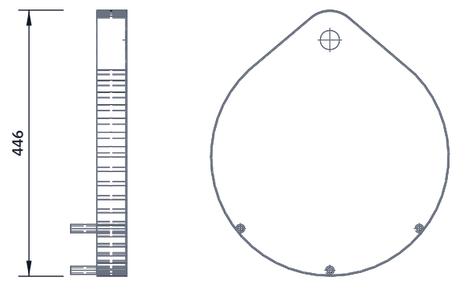

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

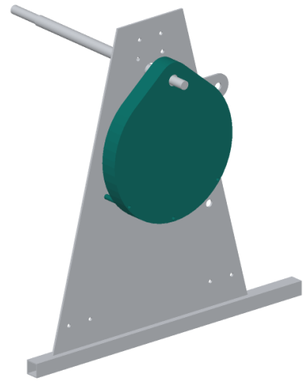

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Outline: a 400 mm circle round the gear centre joined by straight sides to a 100 mm circle round the crank shaft centre (196 above).
Face: 2 mm sheet cut to the outline; 32 mm hole for the crank shaft.
Rim: 2 mm strip 50 wide, rolled and welded round the face edge, so the guard is a cup 50 deep, open toward the cheek.
Spacers: three 14 OD tubes 44 long between the cheek and the cup edge: 150 ahead and behind and 120 below the gear centre, and 190 below it.
M8 bolts through cup, spacer and cheek (drill the cheek 9 mm).
Paint bright yellow so the moving gears are marked.
Fit: 11 mm clear of the gear teeth, 3.5 mm round the crank shaft.
Check: no finger can reach the gear mesh from outside the guard.

SALTDRAG github.com/BoujeeEnjinia1701/saltdrag

SaltDrag gear guard (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
SDG-DWG-108	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Steel sheet 2 mm, tube 14 OD spacers, M8 bolts; painted yellow

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand