



CONCEPT, NOT FOR FABRICATION

SiltHaul · github.com/BoujeeEnjinia1701/silthaul

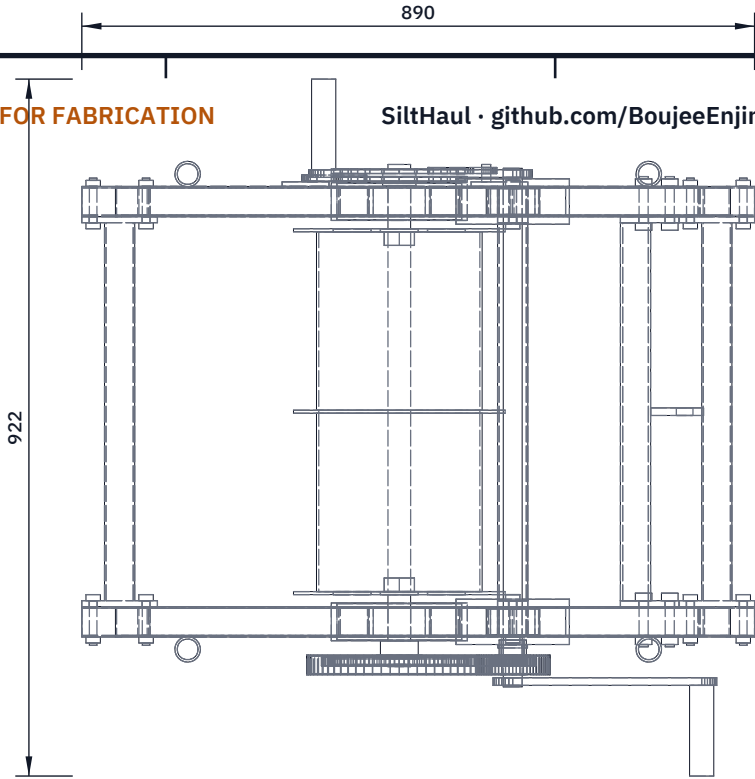


TOP VIEW

Scale 1:10; looking down (along -Z)

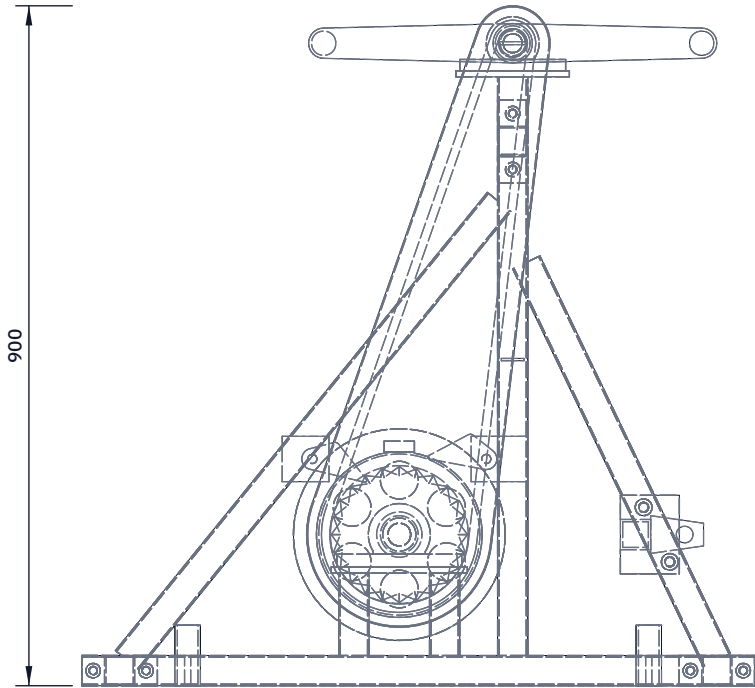


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

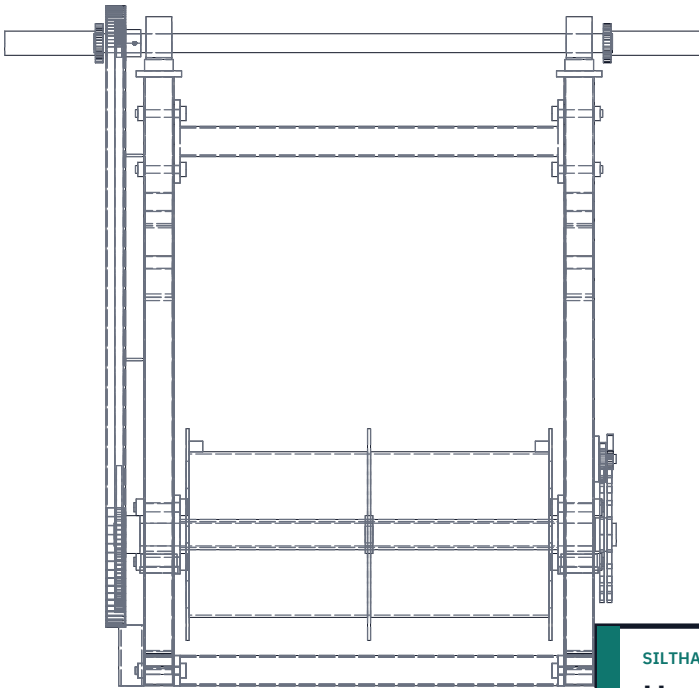

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

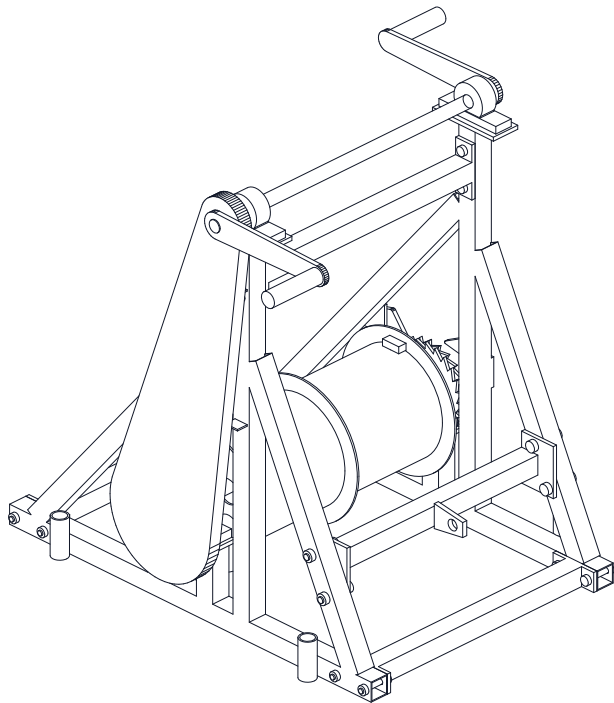

ISOMETRIC VIEW

Not to scale; stakes and sling not shown; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Frame 890 x 662 x 814, 40 x 40 x 2 SHS, flat-pack:
two welded side frames 890 x 814 (9.2, 9.6 kg) and four bolted cross members with 8 mm end plates (8.0 kg): 8 M10, 4 M12 (21)
Drum 219.1 x 3.0 tube, 484 between rings; axis 200 above ground
Two halves of 236, 21 turns of 10 rope each at 11 pitch
Pull half underwound (rope leaves at 85 up), return half overwound (315 up)
Drum shaft 30 in UCP206 (3) at +/- 278; crank shaft 25 in UCP205 (4)
Crank shaft 850 up, 150 behind the drum axis; cranks 250 radius (5)
ISO 08B-1 chain (7), 12T on the crank shaft, 48T on the drum: 4:1
4 mm S235 shear pin (10) in the small sprocket hub (6): about 2.5 kN rope
Two 24-tooth ratchet wheels on the drum shaft, one pawl each (8)
Closed chain guard (9) on the -Y side; anchor bar and eye 200 up at the rear
Third-angle; front view from -Y; rope arrives from -X; (n) = BOM line

SILTHAUL

github.com/BoujeeEnjinia1701/silthaul

Hand capstan: general arrangement

DRAWING NO.

SLH-DWG-001

REV

P3

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-03

DRAWN

Amish Chadha

MATERIAL / NOTES

Steel weldments, bought bearings, sprockets and chain per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION