
CONCEPT, NOT FOR FABRICATION


SleeveDrift · github.com/BoujeeEnjinia1701/sleevedrift

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-11-02	AC
P2	SVD-DDR-002: design for construction	2026-11-02	AC
P3	SVD-DDR-003: drill drive on each winch, drum guards	2026-10-03	AC
P4	Kit 1.9.1: redrawn from the detailed model (bolts, welds, pins)	2026-11-02	AC

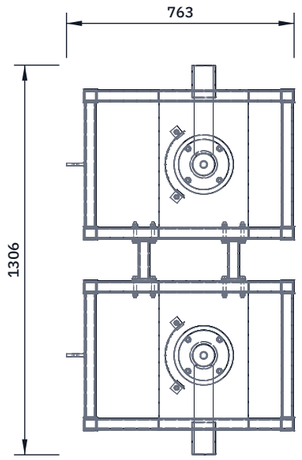


TOP VIEW

Scale 1:20; looking down (along -Z)

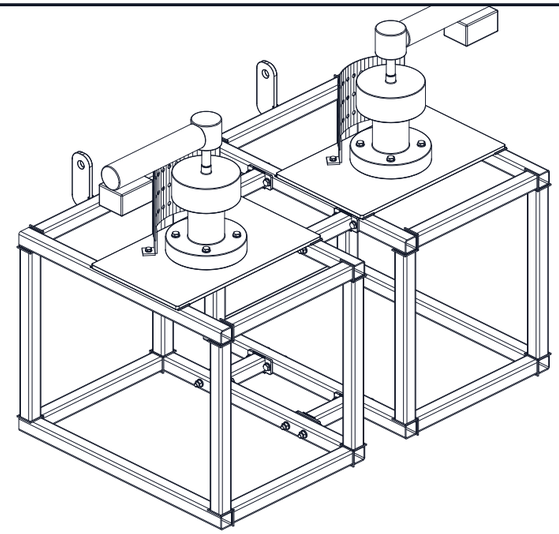


ISOMETRIC VIEW

Not to scale; seen from the front right and above



FRONT VIEW

Scale 1:20; looking at the front (along +Y)

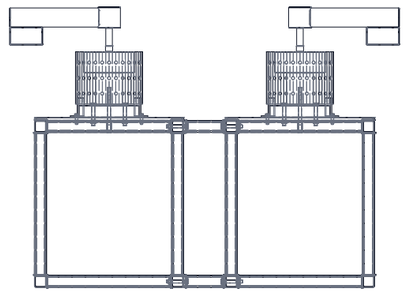

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

MAIN DIMENSIONS AND INTERFACES (MM)

Two welded trestles (15), each 700 x 500, 560 high, 40 x 40 x 3 SHS
Right-angle drill (30) on a winch bit (31) in each socket; body outboard
Drill in high gear only, 120 rpm; clutch about 35 N m; no trigger lock
Drum guard (33) round the rear 120 deg, 260 dia, two legs to the top plate
Winch handles stowed; hand cranking is the fallback
Trestle 33.7 kg; carried and set one at a time
Top plate 300 x 500 x 10, drilled to the winch base pattern
Winch A (pull rope) at y = -200; winch B (tail rope) at y = +440
Winch centres 300 back from the trestle front (+X face)
Rope reaches the drums about 650 up, 6 to 7 deg rising
Station front 5,500 from the pipe mouth at the design case
Anchor eye 22 hole 640 up; round sling (19) level to a structural anchor
Rope bins (18) outboard; nobody in the rope lines while hauling
Third-angle; front view from -Y; pipe mouth toward +X; (n) = BOM line

SLEEVEDRIFT

github.com/BoujeeEnjinia1701/sleevedrift

Portal haul station: general arrangement

DRAWING NO.	REV	SHEET	SIZE
SVD-DWG-002	P4	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-11-02	Amish Chadha

MATERIAL / NOTES

40 x 40 x 3 SHS trestles, 10 mm plate; bought winches and drills per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand