



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

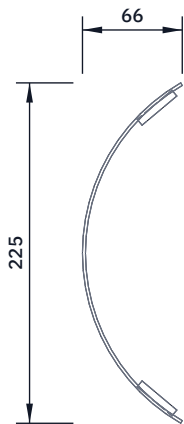


TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

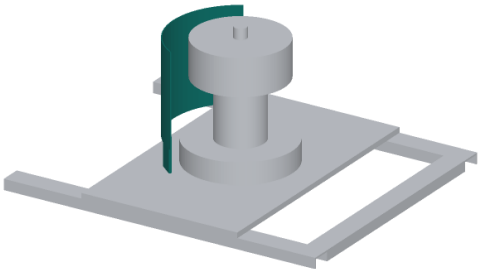

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Two alike: a hoop 260 outside diameter round the rear 120 deg of the winch
- Sheet 2 mm perforated, 175 high, rolled; top edge 790 above the ground
- Two legs 30 x 5 flat, 65 long, welded inside the hoop 10 deg in from each end
- Each leg turned out at the foot and bolted M8 into the trestle top plate
- Open toward the pipe (+X) so the rope reaches the drum
- Check: 10 clear of the drum and rope; nothing to catch a sleeve

SLEEVEDRIFT

github.com/BoujeeEnjinia1701/sleevedrift

Winch drum guard: making sketch

DRAWING NO. SVD-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 2 mm perforated steel sheet, 30 x 5 mm flat bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand