


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	No economizer studs on the roof; the bank box frame is bolted down with the...	2026-10-02	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

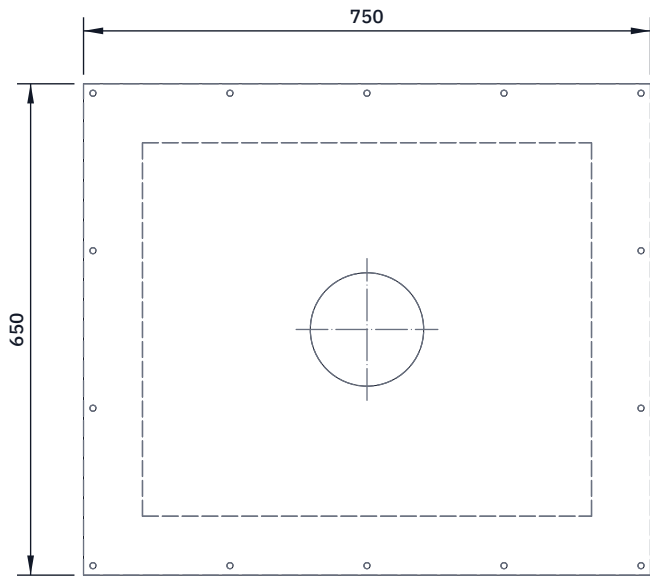


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

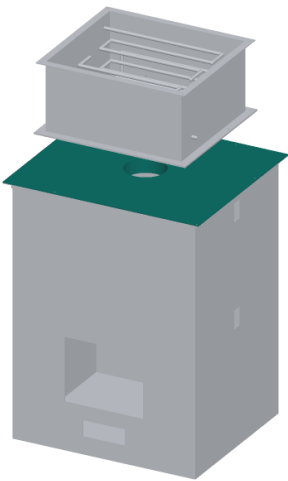

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Roof plate: 3 mm sheet 750 x 650, the outside of the top frame.

Cut a 150 hole in the centre for the flue.

Drill 14 holes 9 mm, 12.5 in from the edge, to match the frame:

five along each side, two more at each end.

The evaporator bank box (sketch 122) stands on the roof: its

bottom frame takes the same 14 bolts, M8 x 35.

Roof board: 50 mm fibre board 594 x 494 with a 150 hole, pinned

under the plate with stainless pins and speed washers, centred.

Fit: on a 12 mm ceramic rope gasket on the frame; bank box frame

on a second gasket on top; 14 M8 bolts through all three, nuts

under the frame. The board fits inside the wall lining.

Check: the roof seats on the rope all round; no light shows.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot firebox roof and roof board: making sketch

DRAWING NO. STR-DWG-110			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 3 mm; 50 mm fibre board					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	