



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

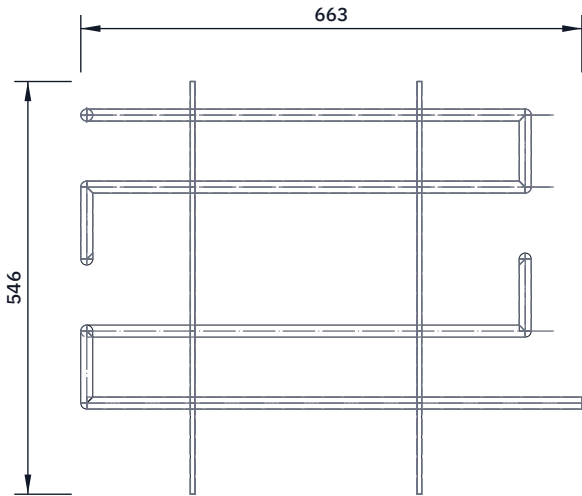

TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

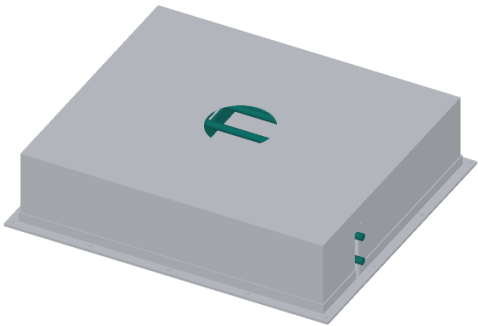

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

About 6.4 m of 15.88 x 1.24 stainless tube in one length, bent into two layers of five runs; bends 47.6 radius (a standard 5/8 in bender), runs 95 apart, bend tips 290 each side of the centre. Layers 45 and 105 above the roof plate, joined by a riser at the left end.

Water goes in at the top layer and out at the bottom layer, both at the right end, 152 in front of the centre: the hottest gas meets the last of the water (counterflow).

Supports: two 6 mm bars across the box, 300 apart, standing on the roof plate under the bottom layer; two 6 mm spacers between layers.

Pressure test with water before fitting (see the safety stops).

Check: the bank sits on all four bars; tails level and square.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot evaporator bank tube and supports: making sketch

DRAWING NO. STR-DWG-123			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Stainless steel 316 tube 15.88 OD x 1.24 wall (5/8 x 0.049 in); flat bar 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand