
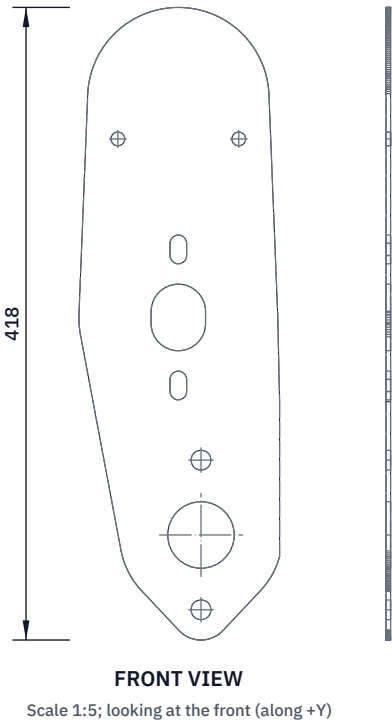


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Laser cut to the outline shown, 133 x 418 mm, from 3 mm steel.

All positions from the main bore centre, up the plate and toward the back (the stair side); the hole layout picture repeats them.

Main bore 44 mm; its bolt holes 13 mm at 49.5 mm above and below.

Countershaft bore: a 36 mm slot, 143.9 mm up, 15 mm back, 8 mm long up the plate; bolt slots 11 mm wide, 45 mm above and below it, also 8 mm long. The slots let the chains be tensioned.

Spacer holes 9 mm, 262 mm up, 55 mm back and 25 mm forward; countersink them on the outside face.

Fit: weld to the inside face of the right rail like the axle plate, on the same alignment bar; the countersinks face the rail.

Check: nothing stands proud of the outside face but the welds.

STEPCLIMBER

github.com/BoujeeEnjinia1701/stepclimber

StepClimber chain case outer plate: making sketch

DRAWING NO. SCM-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 3 mm, S275 or similar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand