| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-10-02 | AC |




**TOP VIEW**

Scale 1:5; looking down (along -Z)




**FRONT VIEW**

Scale 1:5; looking at the front (along +Y)



**RIGHT VIEW**

Scale 1:5; looking at the right side (along -X)

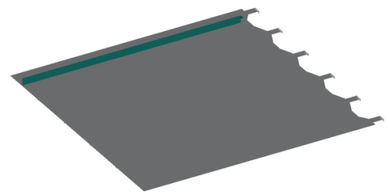

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

Cut ten strips 50 x 940 mm.
Fold each 90 deg along its length, 20 mm from one edge, between two hardwood battens clamped in a vice: a 20 mm flange and a 30 mm web.
Bond the flange under the bottom plate with high-temperature silicone adhesive, web hanging down, running down the slope.
Pitch 99.6 mm; first fin 49.8 mm in from the side edge; ends 28 mm in from the plate's high edge and clear of the low edge zigzag.
Check: each fin square to the plate within 5 deg; adhesive along the whole flange.

STILLSTACK  github.com/BoujeeEnjinia1701/stillstack

# StillStack heat-rejection fin (make 10): making sketch

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| SSK-DWG-108 | P1 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 1:5 | mm | | 2026-10-02 | Amish Chadha |

MATERIAL / NOTES
Aluminium flashing or sheet 0.5 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand