


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

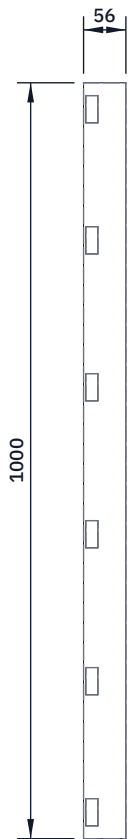


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

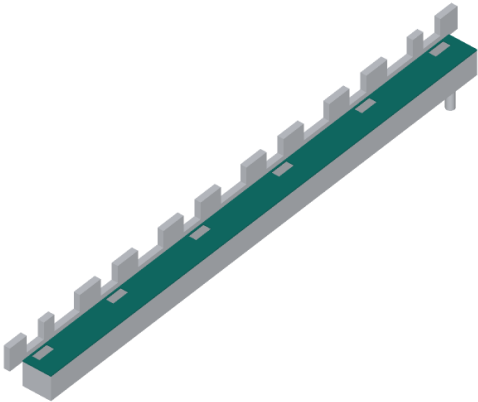

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut the bought lid to 1,000 mm.

Six slots 16 x 36 mm, 3 mm in from the edge that goes against the low wall, centred at 97.2, 291.6, 465 mm each side of the centre line (the distillate tongue lines).

Drill a 6 mm hole at each slot corner and cut between with a sharp knife; deburr. No slot anywhere else: the brine tongues pass 10.5 mm above the closed lid.

Clean with water and mild detergent only.

Fit: snaps onto the channel; the bent distillate tongues go 3 mm down into the channel through the slots.

Check: the lid is tight on the channel all along its length.

StillStack distillate manifold lid: slotting sketch

DRAWING NO. SSK-DWG-114			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bought food-grade PP or HDPE channel lid, 56 mm wide					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand