



CONCEPT, NOT FOR FABRICATION

SunClave · github.com/BoujeeEnjinia1701/sunclave

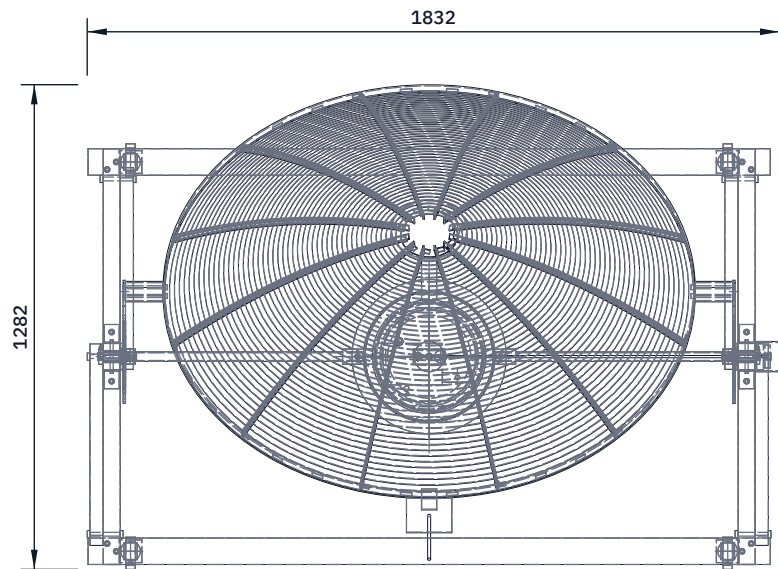


TOP VIEW

Scale 1:20; looking down (along -Z)

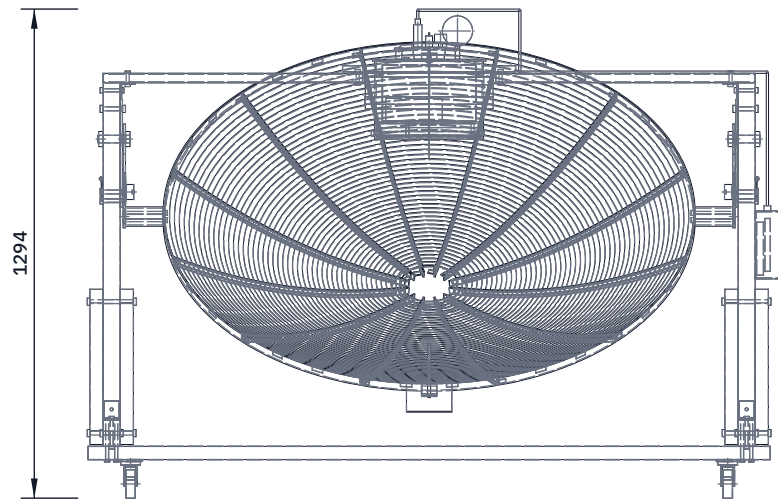


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

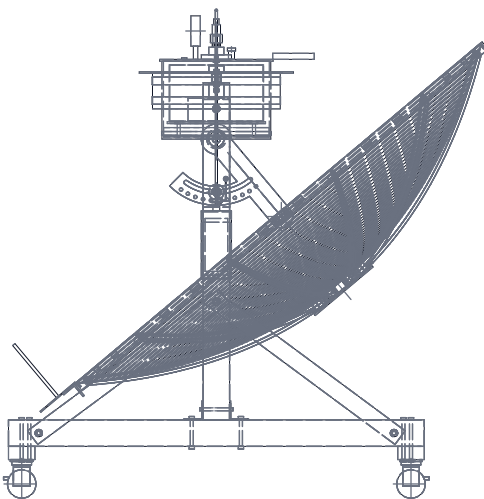

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

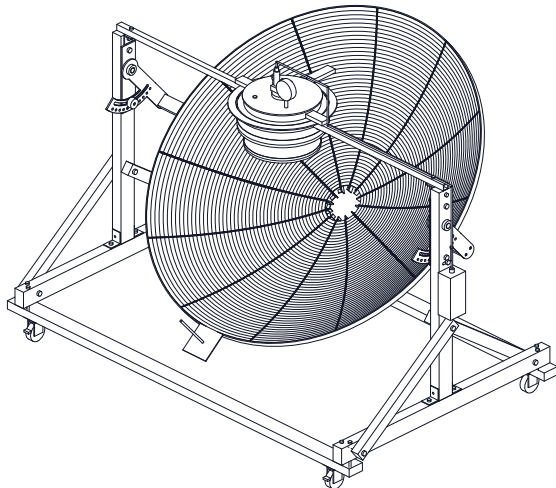

ISOMETRIC VIEW

Not to scale; dish at 50 deg sun elevation; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS (MM) AND DATA

Overall 1832 W x 1282 D x 1294 H at 50 deg elevation
Dish 1400 dia, f = 500, depth 245, rim angle 70 deg
Focus and tilt axis 950 above ground; elevation 15 to 90 deg
Base 1805 x 1100, bolted timber; uprights at +/-840; 4 locking castors
Pressure canner about 12 L, 280 ID x 200 deep; base on focal plane
Black base and 80 mm wall band; 25 mm jacket above
Basket 250 x 150 on 40 trivet; 1.5 L water
Holder ring fixed to the stand; yoke plates turn on fixed 20 mm axles
Two friction locks: star knobs on M10 studs in 140 mm radius slots
Back-up drop pins: 8 mm, holes on 163 mm radius every 7.5 deg
Regulator 103.4 kPa gauge; factory gauge and relief valve
Lid not drilled: probe and transducer on vent-stem adapter plate
About 44.8 kg empty (limit 45); largest piece about 15 kg
Vessel is a hot zone; mark a 2 m keep-out (R11)
At risk at TRL 3: R4, R15. See SCL-CAL-001 v0.4; build plan SCL-BLD-001
PRELIMINARY, NOT FOR FABRICATION

SUNCLAVE

github.com/BoujeeEnjinia1701/sunclave

General arrangement, TRL 3 model

DRAWING NO. SCL - DWG - 001			REV P4	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha	

MATERIAL / NOTES
Aluminum reflector, steel dish frame and yoke, treated timber stand. See bom/bom.csv