


CONCEPT, NOT FOR FABRICATION


SwapCell · github.com/BoujeeEnjinia1701/swapcell

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA, interface v0.3 (SWC-CAL-001)	2026-09-25	AC
P2	Notes: connector family, R3 derating (SWC-DDR-002)	2026-09-25	AC
P3	Constructable design: latch, fixings, dock (SWC-DDR-003)	2026-10-01	AC




TOP VIEW

Scale 1:10; looking down (along -Z)

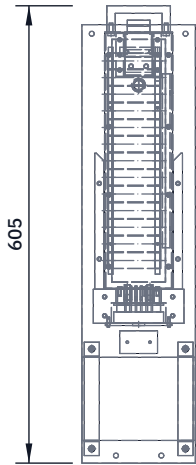


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

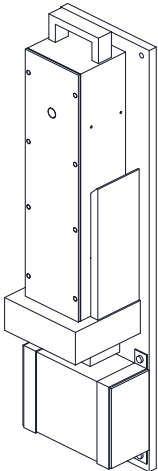

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

INTERFACE V0.3 KEY DIMENSIONS (MM)

Pack body 340 x 90 x 80, tolerance +0 / -1.5

Overall length 393 (handle 35, plug 18)

Datum A: connector face; insertion along Z, connector first

Plug centred in width, 8 toward back face from depth centre

Guide faces 340 x 80, 90 apart; receiver clearance 1 per side

Latch pawl 36 wide, 45 below top end, back face,

6 proud, hooks 4 under the catch; thumb release 5

Handle zone 84 x 22, up to 35 above top end

Latch class V1: proof 1.72 kN along insertion axis

Vehicle receiver preload 330 N via over-centre lever

Contacts: P1 PACK+, P2 PACK-, S1 SGND, S2/S3 CAN,

S4 WAKE, S5 AUX, S6 INTERLOCK (10 kOhm coded)

Connector: custom keyed shroud, commercial contacts

R3: 20 A open-air mount; derate 50 to 60 C cell temp

Flush wake button on lid face (interface v0.3)

Pack mass about 3.0 kg; 13S2P, 46.8 V, 468 Wh

PRELIMINARY, NOT FOR FABRICATION

SWAPCELL

github.com/BoujeeEnjinia1701/swapcell

General arrangement, pack in wall dock

DRAWING NO. SWC-DWG-002			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Pack: 1.5 mm 5052 Al tray, FR polymer lid; dock: 12 mm Al plate, printed shelf and guides. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand