
CONCEPT, NOT FOR FABRICATION


TrunkBelay · github.com/BoujeeEnjinia1701/trunkbelay

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the constructable TRL 3 model (TKB-DDR-002)	2026-10-03	AC
P2	Aluminium frame and tag line (TKB-DDR-003)	2026-10-03	AC
P3	Tether hole for the fixed end; 55 mm cleat web (TKB-DEC-001 D-S1, D-S2)	2026-10-25	AC

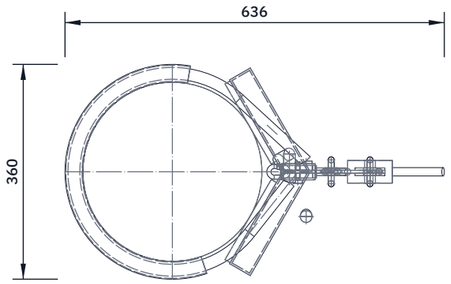


TOP VIEW

Scale 1:10; looking down (along -Z)

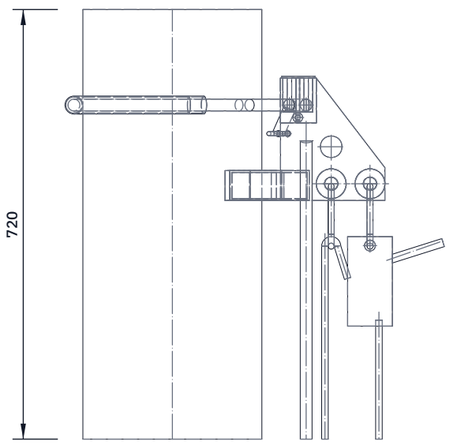


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

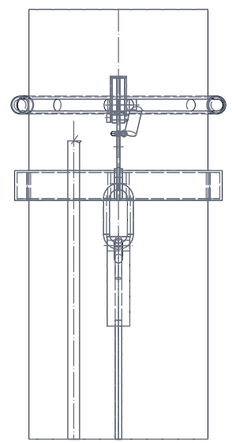

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

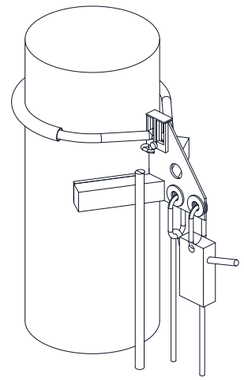

ISOMETRIC VIEW

Seen from the front right, above; 300 mm trunk section for reference

KEY DIMENSIONS (MM) AND DATA

Fits trunks 200 to 450 across; drawn on a 300 trunk
Spine 5 aluminium plate, 175 long x 205 high
Bearing bars RHS 50 x 40 x 3 in a 120 deg V
Rubber pads 155 x 50 x 10
Load eye 150 out from the spine front edge, 28 up
Chain line 160 above the frame foot; slots 7.5 wide
Chain 6 mm grade 80, 110 links; sleeve 600 tubular webbing
Tether hole 10 at 12 back, 112 up; G80 connecting link
Cheeks 8; keeper 3 steel; ball-lock pin 8, grip 27
Locking factor 1.54 or more (TKB-CAL-001, B4)
Sized for 2.5 kN static (R1); one person, 100 kg
Carried 4.67 kg; bag hauled on the tag line
PRELIMINARY, NOT FOR FABRICATION

TRUNKBELAY

github.com/BoujeeEnjinia1701/trunkbelay

Palm trunk rescue collar and lowering kit: general arrangement

DRAWING NO.	REV	SHEET	SIZE
TKB-DWG-001	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

6082-T6 aluminium plate and RHS, TIG welded; rubber pads; grade 80 chain. See bom/bom.csv

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand