



CONCEPT, NOT FOR FABRICATION

VoidScope · github.com/BoujeeEnjinia1701/voidscope

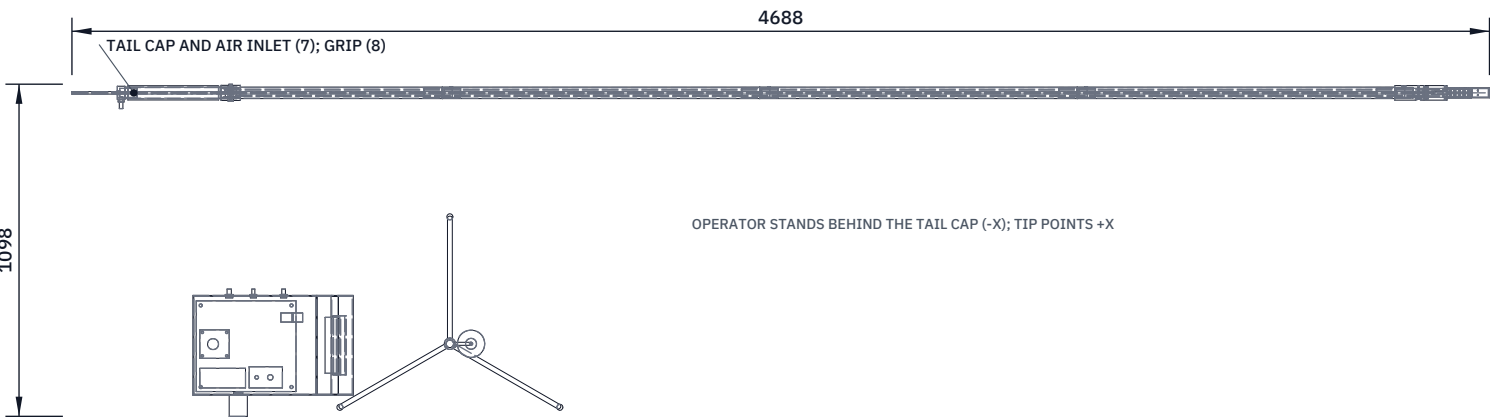


TOP VIEW

Scale 1:25; looking down (along -Z)

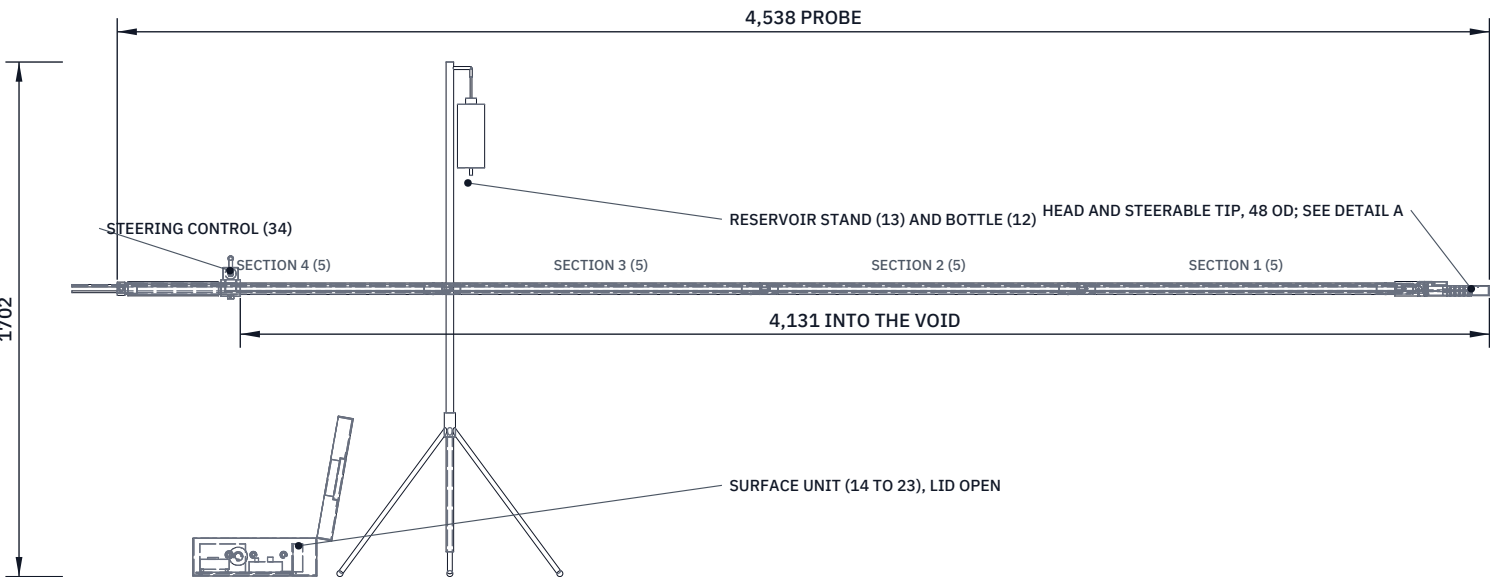


FRONT VIEW

Scale 1:25; looking at the front (along +Y)

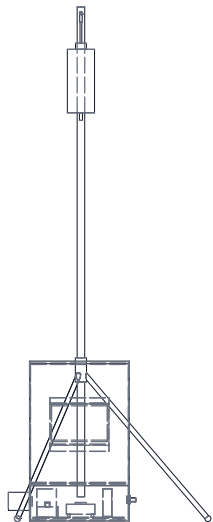


RIGHT VIEW

Scale 1:25; looking at the right side (along -X)

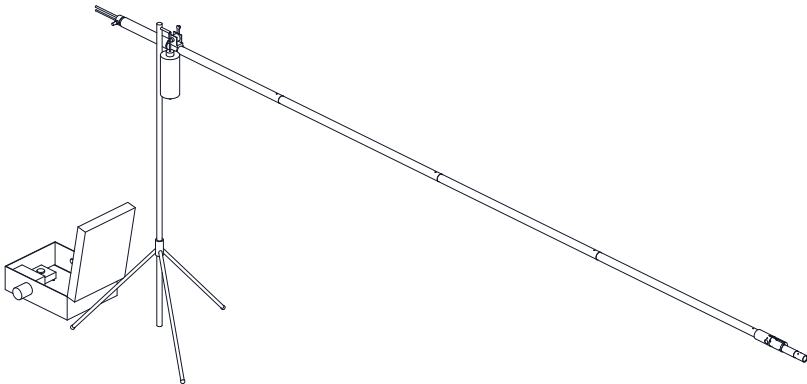

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

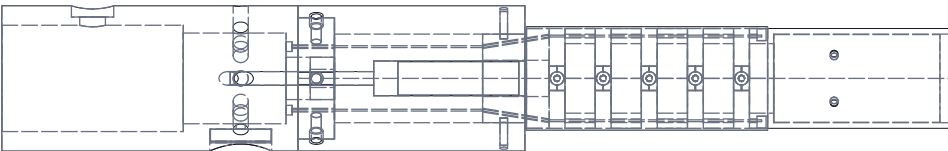

DETAIL A: HEAD AND STEERABLE TIP

Scale 1:2.5; plan from above, tip to the right, straight; bends 90 deg each way in this plane

MAIN DIMENSIONS AND INTERFACES (MM)

Probe 4,538 long; working length 4,131; axis 950 above ground as held
Rod: 4 sections 38.1 x 1.47 6061-T6 tube, 1,050 long
Couplers 34.93 x 2.11 x 120, 60 bonded and pinned; snap button
Head 48 OD at most, tip straight; passes a 51 mm core hole (R1)
Collar: socket, plenum, 6 x 5 outlets, speaker, water exit
Nose: base link 6.5 below the axis; bite valve on top
Tip: 5 joints, 90 deg each way; 140 long; 29 mm IP68 camera
Steering: lever and drum on section 4, two wires in housings
Air: rod bore is the duct; inlet barb on the tail cap
Water: 4 x 2.5 tube inside an 8 x 6 PTFE guide
Case 410 x 330 x 175; lid opened 100 deg
Third-angle; front view from -Y; (n) = BOM line

VOIDSCOPE

github.com/BoujeeEnjinia1701/voidscope

Rubble void search probe and surface unit: general arrangement

DRAWING NO. VDS-DWG-001		REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha

MATERIAL / NOTES
6061-T6 aluminium tube and bar; bought parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION