



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

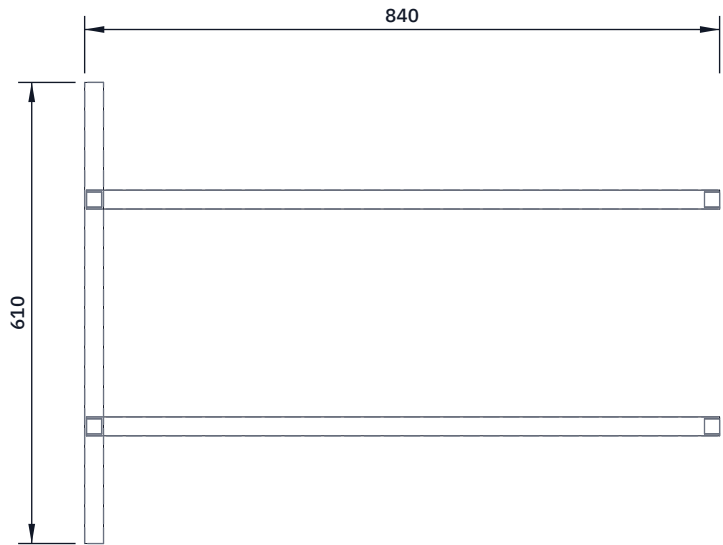


TOP VIEW
Scale 1:10; looking down (along -Z)

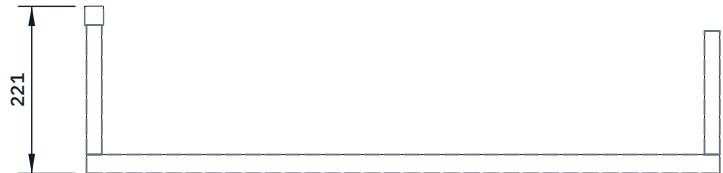

FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

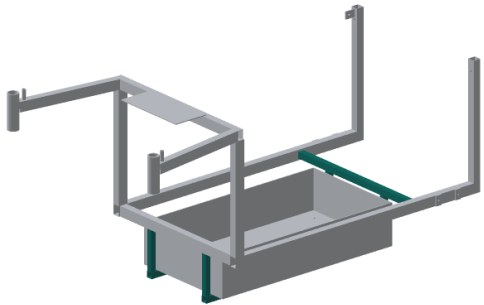

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Rear cross member 610 long between the rails, 332.5 ahead of the rear axle line, centre at axle height (333.5 up).

Bearers 2 x 837.5 long, 300 apart centre to centre, top faces 150 above the ground (125 mm ground clearance underneath).

Hangers: rear 2 x 171 under the rear cross member, front 2 x 164 under the front lower cross member, all 150 out from the centre line, standing on the bearer ends.

Weld the hangers to the bearers first (a ladder upside down), then offer it up under the cross members and weld the tops.

Drill four 6.6 mm holes through the bearers for the cradle bolts: 400 and 1,080 ahead of the rear axle line.

Check: bearer tops level within 2 mm and 300 apart; cradle drops in with 5 mm to spare in front of the hangers.

WATERWALKER

github.com/BoujeeEnjinia1701/waterwalker

WaterWalker rear cross member and cradle carrier: making sketch

DRAWING NO.
WWK-DWG-103

REV
P1

SHEET
1 of 1

SIZE
ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Square tube 25 x 25 x 1.5 mm (cross member, bearers); 20 x 20 x 1.5 mm (hangers)