



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

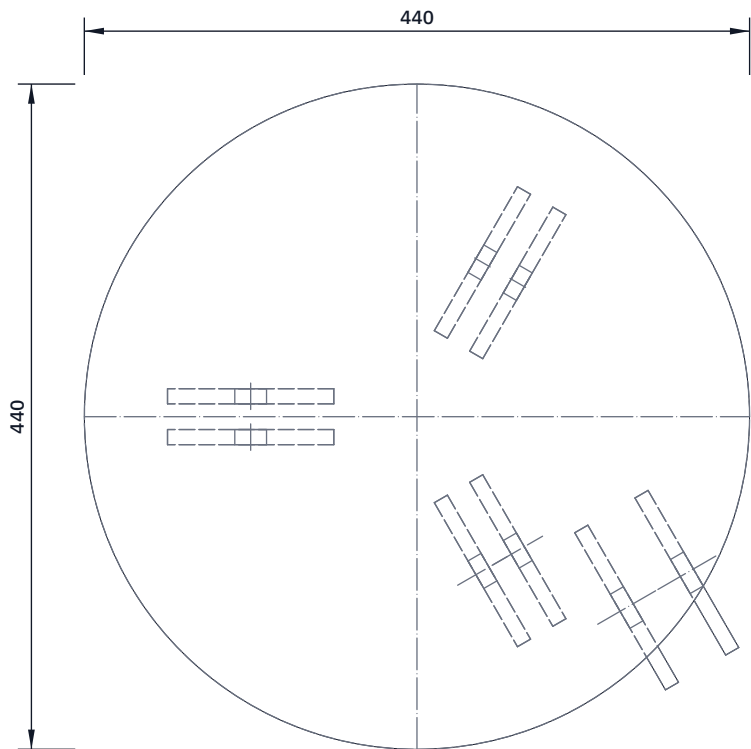


TOP VIEW

Scale 1:5; looking down (along -Z)

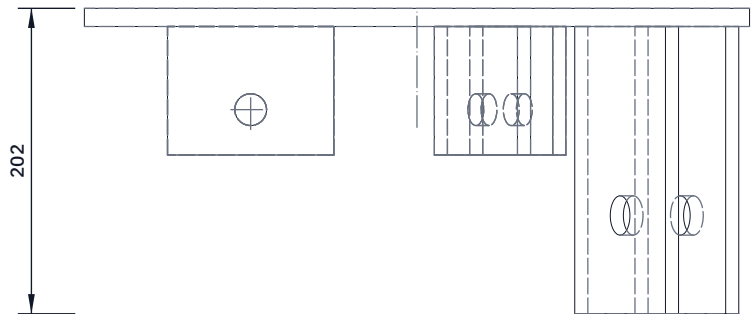

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

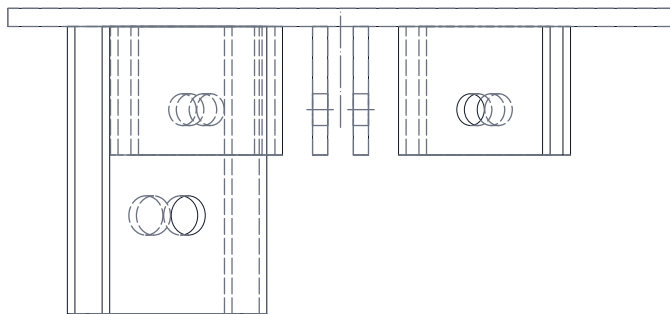

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make one. Disc 440 mm across, 12 mm S355 plate.
Leg lugs: six 110 x 85 x 10 mm plates under the disc, in three pairs at 120 deg, each pair 17 mm apart (inside faces) and centred 110 mm out from the middle, running outward.
21 mm hole in each, 55 mm below the disc, 110 mm out.
Sheave hangers: two 120 x 10 mm plates, 190 mm deep, hanging under the leg 1 pair, 36 mm apart (inside faces), 80 mm to one side of that pair and 179 mm out from the middle.
26 mm axle hole in each, 125 mm below the disc.
Profile cut; drill each pair together; 8 mm fillet welds.
Check: a 20 mm pin passes through each pair; the 25 mm axle passes both hangers; holes square to the plates.

WELLSLING

github.com/BoujeeEnjinia1701/wellsling

WellSling: tripod head weldment (make 1)

DRAWING NO. WSL - DWG - 106		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 12 mm and 10 mm S355 plate, hot-dip galvanised				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	