SUBMISSION ITEM 06

Execution evidence

Real transactions on Base Sepolia

One owner journey on the deployed app: 16 transactions, each read back from the chain, including the agent acting on its own.

Event	FinTechathon 2026, Topic F (on-chain)
Network	Base Sepolia testnet (chain 84532)
App	`https://boundra-api.onrender.com`
Blocks	48,368,221 to 48,368,421, 20 October 2026

1 Summary

An owner used the deployed Boundra app to give Boundra's agent a mandate: put 300 MockUSDC into LiquidVault, with withdrawals allowed at any time. The owner signed every authority and funding transaction in their own wallet; the agent then made the deposit by itself, with its own key; the owner paused, resumed, took the funds back and revoked the mandate. All 16 transactions succeeded on chain.

Who	Address
Owner	`0xEcc070725898eb3aaea8448b16272eE6E56c5e81`
Owner's executor	`0x0e4c01b7fAc2e45a2a38eA7B9A0744D4eF0e9E2E`
Boundra's agent (operator)	`0x7d8616836B3fC6FFABE090a4d3658e5a5C3A87F1`
Factory	`0xFbD91368BfFA9AF5C7034bCB7F53Cc1eC906b7f4`
LiquidVault	`0x7C0fC1a0551d5099d093E8D8b34a214758f7B27a`
MockUSDC	`0x13e7a4d02941a029Cf841f16E38eF377cb21e1Cf`

What the evidence shows

The agent acted alone, with its own key, and only within the limits the owner signed; the owner kept every key and every control; funds only ever returned to the owner.

2 The journey

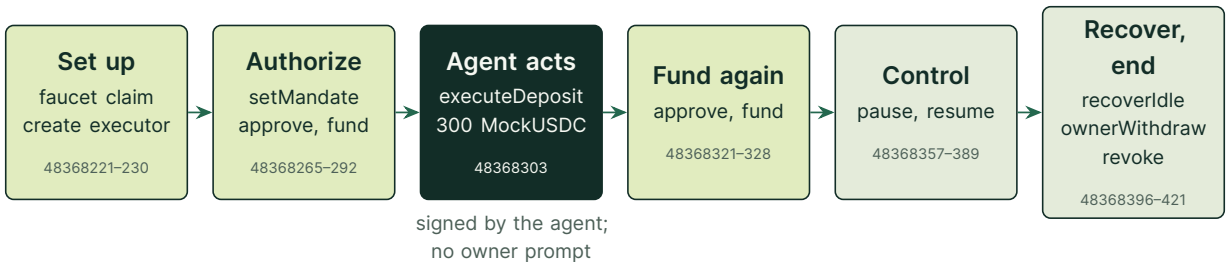

Figure 1: Owner transactions in light boxes, the agent's in the dark box. Block numbers below each phase.

The agent's own transaction. Eleven blocks after the executor was funded, the worker proposed a deposit, checked it against the confirmed mandate, simulated it, signed it with the agent's key and sent it: `0xb9e053eb…0100b`, block 48,368,303, from the agent to the owner's executor, `executeDeposit` of 300 MockUSDC into LiquidVault, status success. The single allocation was then complete, so the agent held and sent nothing more.

3 All transactions

Block	Sender	Call	Transaction hash (Basescan)
48368221	owner	Faucet `claim`	`0x74f57e9df29dab05d4aab933cf296c8f5d5e32afb02cabda189c536464c04fc0`
48368230	owner	Factory `createExecutor`	`0x815efb6f67f5db80d164689e9ef13ce405d91fe9eab271f286b287b682a18808`
48368265	owner	Executor `setMandate`	`0xe648e4e4b2e0717c0fa014da53f87024cb78d7d05edb7543fb23579b3041797d`
48368283	owner	MockUSDC `approve`	`0x4f3609689d393939bad1eee1766d37abee5a4c0b75c5ac770bea1a7a4f453b0d`
48368292	owner	Executor `fund`	`0xf67668a01d46122526af2eafe582511e570ddf833fea7d3764269ff17c599300`
48368303	**agent**	Executor `executeDeposit`	`0xb9e053eb35b4780703d9d6e6e79f045d3401fb219afea3c6789471574740100b`
48368321	owner	MockUSDC `approve`	`0xe1704fcc1ea7919da1b3489af32237b76120c0063b6456343bfa4d2d59af9b05`
48368328	owner	Executor `fund`	`0x23e0c927b0fc41cbf3844d806769897c128f85f2265fa1183fd7ba48ee473151`
48368357	owner	Executor `pause`	`0xdfd3c2eff130eb00fbf0e8cb09b9b4ba7d95db840691d43d66e7d1e8133babc7`
48368373	owner	Executor `pause` (repeat)	`0xc0bd425776bd4bc5783cfd92c555d7e7f50ed3455ddf3de09c561c482458bb91`
48368382	owner	Executor `resume`	`0xb7251b4d5495e56506c2636671864868914401 9a1edb7cbfe8f0f28b6e7d1abe`
48368389	owner	Executor `resume` (repeat)	`0x2ab19ea34d287c9f8f242ddb2c79aff38d6010fabcbf05017a80e21b8e8ffdf5`
48368396	owner	Executor `recoverIdle`	`0x56efae44fc317b28e958f5e99e56743cbf553dd26f6b0999dd28e5a94117c564`
48368408	owner	Executor `ownerWithdraw`	`0xef7e0b9a59098e90d42fec06446533bc332715c9540953de96f4e32a1829d9e9`
48368417	owner	Executor `revoke`	`0x7dbd39a2384c624bd5fa784e40fb4b835f5097e423db27e739a111502699960c`
48368421	owner	Executor `revoke` (repeat)	`0xce1de1440d4084d9ffee8929a4f8a22f2e482320f02eed6b957bca5d0e958812`

Every transaction above has status **success**. Senders and targets were read back from the chain: the owner's wallet signed every owner transaction, and only the agent's address signed the deposit.

> **About the repeats.** Pause, resume and revoke appear twice because the app did not show the new state until the page was reloaded, so the owner sent them again. The first of each pair had already taken effect; both succeed on chain. A fix (the overview polls until the confirmed block and disables the controls meanwhile) is in pull request #11.

4 What it proves

Claim	Evidence above
The owner keeps every key	Every owner transaction is signed by the owner's address; the server never signed for them.
The agent acts on its own	The deposit is signed by the agent's address, with no owner transaction in that block.
The agent stays within the mandate	The executor accepted `executeDeposit` only after `setMandate` and `fund`; it sent nothing after the single allocation.
The owner stays in control	`pause` and `resume` stopped and restarted the agent; `revoke` ended the mandate for good.
Funds return only to the owner	`recoverIdle` and `ownerWithdraw` paid the owner's wallet.

5 How to verify

Each hash links to sepolia.basescan.org. With Foundry:

```
cast receipt <hash> status --rpc-url https://sepolia.base.org   # 1 (success)
cast tx <hash> from      --rpc-url https://sepolia.base.org   # the sender above
cast tx <hash> to        --rpc-url https://sepolia.base.org   # executor, factory,
    faucet or MockUSDC
```

The contract addresses come from the reviewed manifest `deploy/manifests/base-sepolia.json`; their deployed bytecode was compared with the repository's compiled contracts before they were pinned. Their source is also published and verified on independent explorers: MockUSDC, the faucet and LiquidVault on Blockscout; TimedVault, the factory and this journey's executor on Sourcify (exact match). So the calls in the table above can be read against the exact code that ran.