
IRestaurantService + GetAllIngredients(): ingredients + GetIngredientById(in p id: integer): + CreateIngredient(in p_ingredient: ingredients): + ModifyIngredient(in p ingredient: ingredients): + RemoveIngredientById(in p id: ingredients): + GetAllDishes(): dishes + GetDishByld(in p id: integer): + GetListOfIngredientsByDish(in p dish: dishes): ingredients + CreateDish(in p ingredient: dishes): + ModifyDish(in p dish: dishes): + RemoveDishById(in p id: integer): + GetAllTypeOdDishes(): typeOfDishes + GetTypeOfDishesById(in p id: integer): + GetServicesByldMenu(in p_idMenu: integer): services - GetServiceByld(in p id: integer): + CreateService(in p menu: menu, in p serviceNumber: integer, in p dayNumber: integer): + AddDishForThisService(in p dish: dishes, in p service: services): + RemoveDishForThisService(in p dish: dishes, in p service: dishes): + NextMenu(in p date: string): - IdMenuByDate(in p date: date): + GetMenuByld(in p id: integer): + PreviousMenu(in p_date: string):

RestaurantService

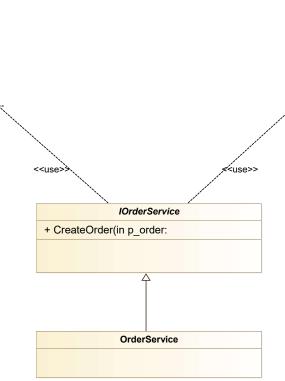

IClientService |

- + GetAllClients(): clients [*]
- + GetClientById(in p id: integer):
- + CreateClient(in p client: clients):
- + RemoveBookingById(in p id: integer):
- + CreateBooking(in p booking: booking):
- + GetBookingByMenu(in p Menu: menu): booking

ClientService