


Hold the task readout fixed. Test the feedback.

One intervention at action 5; compare prediction of the same executed future at action 25.

A Predict once

Observed history

$$H_0 = (E(o_{-10}), E(o_{-5}), E(o_0))$$




Matched models

Transformer / GRU
3 pools x 3 objectives
18 models in total

B Change feedback


One correction; six outputs fixed

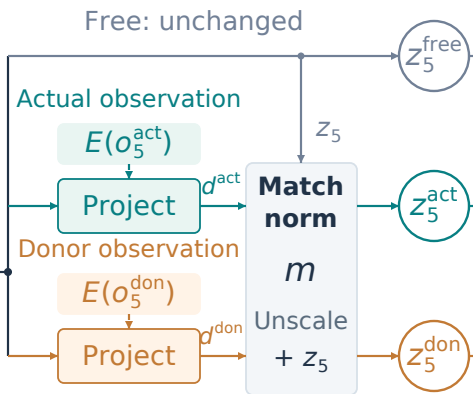

$J_g d = 0; x + d \in \mathcal{R}_g; g = g_A$
Original ReLU activation region
 m : minimum norm over 6 directions

C Roll each branch forward

Same actions; no further observation inputs

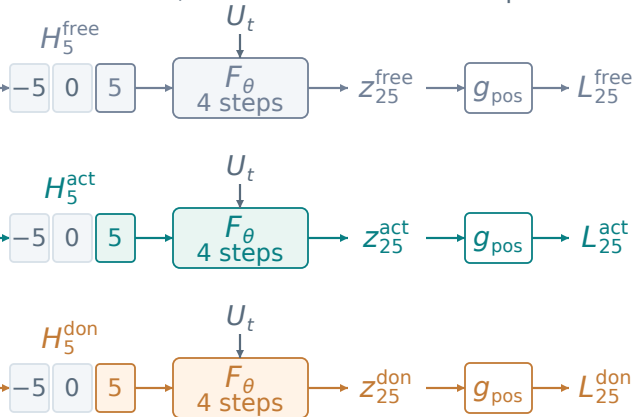

$H_5^b = (E(o_{-5}), E(o_0), z_5^b)$
Shift + append; three aligned action blocks
 $t \in \{5, 10, 15, 20\}; b \in \{\text{free}, \text{act}, \text{don}\}$

D Same current readout

$$g_A(z_5^{\text{free}}) = g_A(z_5^{\text{act}}) = g_A(z_5^{\text{don}})$$

Equality at insertion, within each model.

Core: 256 recipients · 6 groups · 4 reference streams

Terminal block-position error

$$L_{25}^b = \|g_{\text{pos}}(z_{25}^b) - p_{25}\|^2$$

Actual – free: useful correction?

Actual – donor: source sensitivity?

E Test the boundary

Measurement · diagnosis · decisions

Reserved evaluator

g_A, g_C ; score g_D

8 directions

256 fresh recipients

Incremental diagnosis

T0 probe + errors + norm²

Free error: T0 – T1

256 calibration; 512 test

Matched decision

T0 / T1; 32 candidates

8 directions

512 fresh recipients