

KNOWLEDGE ACQUISITION THROUGH NATURAL LANGUAGE CONVERSATION AND CROWDSOURCING

Luka Bradeško

Doctoral Dissertation
Jožef Stefan International Postgraduate School
Ljubljana, Slovenia

Supervisor: Doc. Dunja Mladenić, Jožef Stefan Institute, Ljubljana, Slovenia

Evaluation Board:

Dr. Michael Witbrock, Chair, IBM, New York, New York

Prof. Erjavec, Member, Jožef Stefan Institute, Ljubljana, Slovenia

Prof. Iztok Savič, Member, Univerza v Novi Gorici, Nova Gorica, Slovenia

MEDNARODNA PODIPLOMSKA ŠOLA JOŽEFA STEFANA
JOŽEF STEFAN INTERNATIONAL POSTGRADUATE SCHOOL



Luka Bradeško

KNOWLEDGE ACQUISITION THROUGH NATURAL LANGUAGE CONVERSATION AND CROWDSOURCING

Doctoral Dissertation

PRIDOBIVANJE STRUKTURIRANEGA ZNANJA SKOZI POGOVOR TER S POMOČJO MNOŽIČENJA

Doktorska disertacija

Supervisor: Doc. Dunja Mladenić

Ljubljana, Slovenia, April 2017

To the world...

Acknowledgments

Thank everyone who contributed to the thesis: - EU Projects - Cyc - Dave - Michael - Vanessa - Dunja - Coworkers

Abstract

The English abstract should not take up more than one page.

Povzetek

Povzetek v slovenščini naj ne bo daljši od ene strani.

Contents

List of Figures	xv
List of Tables	xvii
List of Algorithms	xix
Abbreviations	xxi
Symbols	xxiii
Glossary	xxv
1 Introduction	1
1.1 Scientific Contributions	1
1.1.1 Novel Approach Towards Knowledge Acquisition	1
1.1.2 Knowledge Acquisition Platform Implementation as Technical Contribution	2
1.1.3 A Shift From NL Patterns to Logical Knowledge Representation in Conversational Agents	2
1.2 Thesis structure	2
2 Background and Related Work	3
2.1 Labour Acquisition	6
2.2 Interaction Acquisition	7
2.2.1 Interactive User Interfaces	7
2.2.2 Games	9
2.2.3 Interactive Natural Language Conversation	9
2.3 Reasoning Acquisition	9
2.4 Mining Acquisition	9
2.5 Acquisition with the help of existing knowledge	9
2.6 Crowdsourcing Acquisition	9
2.7 Acquisition of Geospatial Context	9
3 Knowledge Acquisition Approach	11
3.1 Architecture	11
3.1.1 Knowledge Base	11
4 Real World Knowledge Acquisition Implementation	15
4.1 Cyc	15
5 Evaluation	17
6 Conclusions	19

Appendix A Proofs of Theorems	21
A.1 Proof of the Pythagorean Theorem	21
References	23
Bibliography	25
Biography	27

List of Figures

Figure 3.1: General Architecture of the KA system, with a simple interaction loop.	13
Figure A.1: Similar triangles used in the proof of the Pythagorean theorem.	21

List of Tables

Table 2.1: Structured overview of related KA systems	5
--	---

List of Algorithms

Abbreviations

CC ... Curious Cat (a name of the knowledge acquisition application and platform that is a side result of this thesis)
CYC ... An AI system (Inference Engine and Ontology), developed by Cycorp Inc.
CycKB.. Cyc Knowledge Base (Ontology part of Cyc system)
CycL ... Cyc Lanugage
JSI ... Jožef Stefan Institute
KA ... Knowledge Acquisition
KDML.. Knowledge SDatabase Mark-up Language
NL ... Natural Language

Symbols

j^* ... black-body irradiance

σ ... Stefan's (or Stefan-Boltzmann) constant

Glossary

Glossary of terms, dada, bada

Chapter 1

Introduction

An intelligent being or machine solving any kind of a problem needs knowledge to which it can apply its intelligence while coming up with an appropriate solution. This is especially true for the knowledge-driven AI systems which constitute a significant fraction of general AI research. For these applications, getting and formalizing the right amount of knowledge is crucial. This knowledge is acquired by some sort of Knowledge Acquisition (KA) process, which can be manual, automatic or semi-automatic. Knowledge acquisition using an appropriate representation and subsequent knowledge maintenance are two of the fundamental and as-yet unsolved challenges of AI. Knowledge is still expensive to retrieve and to maintain. This is becoming increasingly obvious, with the rise of chat-bots and other conversational agents and AI assistants. The most developed of these (Siri, Cortana, Google Now, Alexa), are backed by huge financial support from their producing companies, and the lesser-known ones still result from 7 or more person-years of effort by individuals

Finish Knowledge acquisition and subsequent knowledge maintenance, are two of the fundamental and as-yet not-completely-solved challenges of Artificial Intelligence (AI).

We propose and implement novel approach to automated knowledge acquisition using the user context obtained from a mobile device and knowledge based conversational crowdsourcing. The resulting system named Curious Cat has a multi objective goal, where KA is the primary goal, while having an intelligent assistant and a conversational agent as secondary goals. The aim is to perform KA effortlessly and accurately while having a conversation about concepts which have some connection to the user, allowing the system (or the user) to follow the links in the conversation to other connected topics. We also allow to lead the conversation off topic and to other domains for a while and possibly gather additional, unexpected knowledge. For illustration see the example conversation sketch in Table I, where topic changes from a specific restaurant to a type of dish. In this example case, the conversation is started by the system when user stays at the same location for 5 minutes.

1.1 Scientific Contributions

This section gives an overview of scientific and other contributions of this thesis to the knowledge acquisition approaches.

1.1.1 Novel Approach Towards Knowledge Acquisition

Traditionally KA (knowledge acquisition) approach focuses on one type of acquisition process, which can be either Labor, Interaction, Mining or Reasoning(Zang et al. 2013). In

this thesis we propose a novel, previously untried approach that intervenes all aforementioned types with current user context and crowdsourcing into a coherent, collaborative and autonomous KA system. It uses existing knowledge and user context, to automatically deduce and detect missing or unconfirmed knowledge(reasoning) and uses this info to generate crowdsourcing tasks for the right audience at the right time(labor). These tasks are presented to users in natural language (NL) as part of the contextual conversation (interaction) and the answers parsed (mining) and placed into the KB after consistency checks(reasoning). The approach contribution can be summed up as a) definition of the framework for autonomous and collaborative knowledge acquisition with the help of contextual knowledge (chapter X), and b) demonstrate and evaluate the contributions of contextual knowledge and approach in general chapter X.

1.1.2 Knowledge Acquisition Platform Implementation as Technical Contribution

Implementation of the KA framework as a working real-world prototype which shows the feasibility of the approach and a way to connect many independent and complex subsystems. Sensor data, natural language, inference engine, huge pre-existing knowledge base (Cyc)(Lenat 1995), textual patterns and crowdsourcing mechanisms are connected and interlinked into a coherent interactive application (Chapter X).

1.1.3 A Shift From NL Patterns to Logical Knowledge Representation in Conversational Agents

Besides the main contributions presented above, one aspect of the approach introduces a shift in the way how conversational agents are being developed. Normally the approach is to use textual patterns and corresponding textual responses, sometimes based on some variables, and thus encode the rules for conversation. As a consequence of natural language interaction, the proposed KA framework is in some sense a conversational agent which is driven by the knowledge and inference rules and uses patterns only for conversion from NL to logic. This shows promise as an alternative approach to building non scripted conversational engines (Chapter X).

1.2 Thesis structure

The rest of the thesis is structured in to chapters covering specific topics. Chapter X introduces

Chapter 2

Background and Related Work

In this chapter we will give an overview of approaches and related works on broader knowledge acquisition research field, information extraction, crowdsourcing and geo-spatial context mining.

Knowledge Acquisition has been addressed from different perspectives by many researchers in Artificial Intelligence over decades, starting already in 1970 as a sub-discipline of AI research, and since then resulting in a big number of types and implementations of approaches and technologies/algorithms. The difficulty of acquiring and maintaining the knowledge was soon noticed and was coined as *Knowledge Acquisition Bottleneck* in 1977 (Feigenbaum 1977). In more recent survey of KA approaches (Zang et al. 2013), authors categorize all of the KA approaches into four main groups, regarding the source of the data and the way knowledge is acquired:

- *Labour Acquisition.* This approach uses human minds as the knowledge source. This usually involves human (expert) ontologists manually entering and encoding the knowledge.
- *Interaction Acquisition.* As in Labour Acquisition, the source of the knowledge is coming from humans, but in this case the KA is wrapped in a facilitated interaction with the system, and is sometimes implicit rather than explicit.
- *Reasoning Acquisition.* In this approach, new knowledge is automatically inferred from the existing knowledge using logical rules and machine inference.
- *Mining Acquisition.* In this approach, the knowledge is extracted from some large textual corpus or corpora.

We believe this categorization most accurately reflects the current state of machine (computer) based knowledge acquisition, and we decided to use the same classification when structuring our related work, focusing more on closely related approaches and extending where necessary. According to this classification, our work presented in this thesis, fits into a hybrid approach combining all four groups, with main focus on interaction and reasoning. We address the problem by combining the labour and interaction acquisition (users answering questions as part of NL interaction aimed at some higher level goal, such as helping the user with various tasks), adding unique features of using user context and existing knowledge in combination with reasoning to produce a practically unlimited number of potential interaction acquisition tasks, going into the field of crowd-sourcing by sending these generated tasks to many users simultaneously.

Previous works that can compare with our solution is divided into the systems that exploit existing knowledge (generated anew during acquisition or pre-existing from before in

Fix this, refer to chapters i to specific w

other sources) (**Witbrock2003**; **Forbus2007**; **Kvo2010**; **Mitchel2015**; Singh et al. 2002; Sharma et al. 2010), reasoning (**Witbrock2003**; Speer 2007; Speer, Lieberman, et al. 2008; Kuo et al. 2010), crowdsourcing (**Singh2002**; **Pedro2012a**; Speer, Krishnamurthy, et al. 2009; Kuo et al. 2010; Pedro et al. 2013), acquisition through interaction (**Pedro2012**; Speer, Krishnamurthy, et al. 2009; Pedro et al. 2013), acquisition through labour(**add, probably rather refer to subsections**) () and natural language conversation(**Pedro2012**; **Witbrock2003**; Speer 2007; Speer, Krishnamurthy, et al. 2009; Kuo et al. 2010).

Test referencing table (see Table 2.1).

Table 2.1: Structured overview of related KA systems

System	Parent	Reference	Category	Source	Representation	Prior K.	Crowds.	Context
Cyc project (Cycorp)	/	(Lenat 1995)	Labour	K. Exp.	CycL	/	/	/
ThoughtTrasure(Signiform)	/	(Mueller 2003)	Labour	K. Exp.	LAGS	/	/	/
HowNet (Keen.)	/	(Dong et al. 2010)	Labour	K. Exp.	KDML	/	/	/
OMCS (MIT)	/	(Singh et al. 2002)	Labour	Public	ConceptNet	/	✓	/
KRAKEN (Cycorp)	Cyc	(Panton et al. 2002)	Interaction	D. Exp	CycL	✓	/	/
UIA (Cycorp)	Cyc	(Witbrock, Baxter, et al. 2003)	Interaction	D. Exp	CycL	✓	/	/
Factivore (Cycorp)	Cyc	(Witbrock, Matuszek, et al. 2005)	Interaction	D. Exp	CycL	✓	/	/
Predicate Populator (Cycorp)	Cyc	(Witbrock, Matuszek, et al. 2005)	Interaction	D. Exp	CycL	✓	/	/
CURE (Cycorp)	Cyc	(Witbrock 2010)	Interaction	D. Exp	CycL	✓	/	/
OMCommons (MIT)	OMCS	(Speer 2007)	Interaction	Public	ConceptNet	✓	✓	/
Freebase (Metaweb/Google)	/	(Bollacker et al. 2008)	Interaction	Public	RDF	/	/	/

2.1 Labour Acquisition

This category consists of KA approaches which rely on explicit human work to collect the knowledge. A number of expert (or also untrained) ontologists or knowledge engineers is employed to codify the knowledge by hand into the given knowledge representation (formal language). Labour acquisition is the most expensive acquisition type, but it gives a high quality knowledge. It is often a crucial initial step in other KA types as well, since it can help to have some pre-existing knowledge to be able to check the consistency of the newly acquired knowledge. Labour Acquisition is often present in other KA types, even if not explicitly mentioned, since it is implicitly done when defining internal workings and structures of other KA processes. While we checked other well known systems that are result of Labour Acquisition, Cyc (mentioned below) is the most comprehensive of them and was picked as a starting point and main background knowledge and implementation base for this work.

Cyc. The most famous and also most comprehensive and expensive knowledge acquired this way, is Cyc KB, which is part of Cyc AI system (Lenat 1995). It started in 1984 as a research project, with a premise that in order to be able to think like humans do, the computer needs to have knowledge about the world and the language like humans do, and there is no other way than to teach them, one concept at a time, by hand. Since 1994, the project continued through Cycorp Inc. company, which is still continuing the effort. Through the years Cyc Inc. employed computer scientists, knowledge engineers, philosophers, ontologists, linguists and domain experts, to codify the knowledge in the formal higher order logic language CycL (Matuszek et al. 2006a). As of 2006 (Matuszek et al. 2006b), the effort of making Cyc was 900 non-crowdsourced human years which resulted in 7 million assertions connecting 500,000 terms and 17,000 predicates/relations (Zang et al. 2013), structured into consistent sub-theories (Microtheories) and connected to the Cyc Inference engine and Natural Language generation. Since the implementation of our approach is based on Cyc, we give a more detailed description of the KB and its connected systems in section 4.1 on page 15. Cyc Project is still work in progress and continues to live and expand through various research and commercial projects.

ThoughtTreasure. Approximately at the same time(1994) as Cyc Inc. company was formed, Eric Mueller started to work on a similar system, which was inspired by Cyc and is similar in having a combination of common sense knowledge concepts connected to their natural language presentations. The main differentiator from Cyc is, that it tries to use simpler representation compared to first-order logic as is used in Cyc. Additionally, some parts of ThoughtTreasure knowledge can be presented also with finite automata, grids and scripts (Mueller 1999; Mueller 2003). In 2003 the knowledge of this system consisted of 25,000 concepts and 50,000 assertions. ThoughtTreasure was not so successful as Cyc and ceased all developments in 2000 and was open-sourced on Github in 2015. [link as footnote](#).

HowNet started in 1999 and is an on-line common-sense knowledge base unveiling inter-conceptual relationships and inter-attribute relationships of concepts as connoting in lexicons of the Chinese and their English equivalents. As of 2010 it had 115,278 concepts annotated with Chinese representation, 121,262 concepts with English representation, and 662,877 knowledge base records including other concepts and attributes (Dong et al. 2010). HowNet knowledge is stored in the form of concept relationships and attribute relationships and is formally structured in KDML (Knowledge Database Mark-up Language), consisting of concepts (called semens in KDML) and their semantic roles.

Open Mind Common Sense (OMCS) is a crowdsourcing knowledge acquisition project that started in 1999 at the MIT Media Lab(Singh et al. 2002). Together with initial seed and example knowledge, the system was put online with a knowledge entry interface, so the entry was crowd-sourced and anyone interested could enter and codify the knowledge.

OMCS supported collecting knowledge in multiple languages. It's main difference from the systems described above (Cyc, HowNet, ThoughtTreasure) is, that it used deliberate crowdsourcing and that it's knowledge base and representation is not strictly formal logic, but rather inter-connected pieces of natural language statements. As of 2013 (Zang et al. 2013), OMCS produced second biggest KB after Cyc, consisting of English (1,040,067 statements), Chinese (356,277), Portuguese (233,514), Korean (14,955), Japanese (14,546), Dutch (5,066), etc. Initial collection was done by specifying 25 human activities, where each activity got it's own user interface for free form natural language entry and also pre-defined patterns like "A hammer is for _____", where participants can enter the knowledge. Although OMCS started to build KB from scratch it shares a similarity to our CC system in a sense that it is using crowd-sourcing and also natural language patterns with empty slots to fill in missing parts. OMCS was later used in many other KA approaches as a prior knowledge, similar way as we use Cyc. After a few versions, OMCS was taken from public access and merged with multiple KBs and KA approaches into an ConceptNet KB¹ (Speer, Chin, et al. 2016), which is now (in 2017) part of Linked Open Data (LOD) and maintained as open-source project.

2.2 Interaction Acquisition

Similarly as with Labour KA, interaction Acquisition gets the knowledge from human minds, but in this case the acquisition is an intended side effect, while users are interacting with the software as part of some other activity/task, or as part of a motivation scheme, such as knowledge acquisition games. Besides games, the interaction could be some other user interface for solving specific tasks, or a Natural Language Conversation. This type of acquisition is most strongly correlated with the approach described in this thesis, since Curious Cat uses points (gaming), to motivate users and it interacts with user in NL, while discussing various topics (concepts). It uses the conversation to set up the context and acquire (remember) user's responses and places them properly in to the KB. Sometimes the acquired knowledge is paraphrased and presented back to user to show the 'understanding', which was first tried in OSMC (section 2.1, (Singh 2002)), but there only in non-conversational way as part of the input forms.

2.2.1 Interactive User Interfaces

Interactive user interfaces are the most common representation of interaction acquisition, where the user interface is constructed in a way to help user enter the data and thus make the acquisition much faster and cheaper. Historically, these systems were developed to help the labour acquisition systems, or on top of them, after parent systems reached some sort of maturity and initial knowledge stability. This is the reason why all of these systems rely or are build on top of labour acquisition (section 2.1) or mining acquisition (section 2.4) systems.

KRAKEN system was a knowledge entry tool which allows domain experts to make meaningful additions to CYC knowledge base, without the training in the areas of artificial intelligence, ontology development, or knowledge representation(Panton et al. 2002). It was developed as part of DARPA's Rapid Knowledge Formation (RKF) project in 2000. As its goal was to allow knowledge entry to non-trained experts, it started to use natural language entry and is as this, a first pre-cursor to Curious Cat system and a seed idea for it. It consists of creators, selectors, modifiers of Cyc KB building blocks, tools for consistency checks and tools for using existing knowledge to infer new things to ask. This tool, together

¹<http://conceptnet.io/>

with its derived solutions was later re-written and integrated into Cyc as CURE system (see below). While KRAKEN and later CURE already used Natural Language generation and parsing, and started with the idea of natural language dialogue for doing the KA, the interaction, it was missing user context (user's had to select or search the concept of interest), and also crowdsourcing aspects. Kraken was also missing rules for explicit question asking. The questions were all related to the selected concept and given as a list of natural language forms.

User Interaction Agenda (UIA) was a web based user interface for KRAKEN KA tool (Panton et al. 2002; Witbrock, Baxter, et al. 2003). It worked inside a browser and it worked as responsive web-app (in 2001) by automatically triggering refresh functionality of the browser. It consisted of a menu of tools that is organized according to the recommended steps of the KE process, text entry box (query, answer, statement), center screen for the main interaction with the current tool, and a summary with a set of colored steps needed to complete current interaction. Similarly as KRAKEN itself, this interface was later improved and integrated into main Cyc system as part of CURE tool.

Factivore was a Java Applet user interface for an extended KRAKEN system, meant for quick facts entering (Witbrock, Matuszek, et al. 2005). On the back-end it used the same mechanisms and logical templates, while in the front-end it only allowed facts entering, as opposed to UIA, which also allowed rules (which ended up as not being useful).

Predicate Populator is a similar tool as *Factivore*, which instead of only collecting instances, allows to add general knowledge about classes. For example, instead of describing facts for a specific restaurant, it can collect general knowledge that is true for all restaurants (Witbrock, Matuszek, et al. 2005). The context of the KA in this case, is given by class concept, a predicate and a web-site which is parsed into CycL concepts. These are then filtered out if they do not match argument constraints of the predicate and then shown to user for selection. As part of the validation, this tool had some problems with correctly acquired knowledge. One of the proposed solutions (never implemented), was to start using volunteers to vote about the correctness. This is already a pre-cursor idea for crowd-sourced voting mechanisms that we used in Curious Cat.

CURE (Content Understanding, Review and Entry) is an extended and improved version of *KRAKEN* and its GUI tools (*UIA*, *Factivore* and *Predicate Populator*), which is now integrated directly into CYC web-interface as part of internal knowledge entry tools. Similarly as Curious Cat, CURE can use existing knowledge to check for consistencies, and inference engine with rules to generate new questions. While CURE and Curious-Cat were co-developed through years 2002-2003 and share a lot of similar ideas, the main differences are that CURE is a list of natural language questions (patterns), it doesn't support crowd-sourcing and pro-active behavior, doesn't take user context into the consideration and it only have concept based direct question generating rules (asking about predicates for specific classes/subclasses of concepts)². On the other side Curious Cat have much wider and more complex rules triggering questions based on user context, previous answers and also missing knowledge indirectly related to the topic. It also uses crowd-sourcing for additional correctness check and the questions and answers are presented in sequence so user have a conversation with the system.

OMCommons (Open Mind Commons) is an interactive interface to OMCS which can respond with a feedback to user answers and maintain dialogue (Speer 2007). This is similar approach as we do with Curious Cat and shows understanding of the knowledge users enter. The mechanisms behind is by using inference engine to make analogical inferences based on the existing knowledge and new entry. Then it generates some relevant questions and asks user to confirm them. For example, as given from the original paper, *OMCommons* asks:

²At the time of CC development it didn't have these

"A bicycle would be found on the street. Is this common sense?". This is then displayed to the user with the justification for the question: "A bicycle is similar to a car. I have been told that a car would be found on the street". Users then click on "Yes/No" buttons to confirm or reject the inferred statement. The interactive interface also allows its users to refine the knowledge entered by other users and see the ratings. Users can also explore what new inferences are result of their new contributions.

Freebase started in 2007(Bollacker et al. 2008) and was a large (mostly instance based) crowd-sourced graph database for structured general human knowledge. Initially it was acquired from multiple public sources, mostly Wikipedia. The initial seed was then constantly updated and corrected by the community. On the user interface side, Freebase provides an AJAX/Web based UI for humans and an HTTP/JSON based API for software access. For finding knowledge and also software based editing, it uses Metaweb Query Language (MQL). A company behind freebase was bought by Google in 2010 and incorporated into a Google Knowledge Graph. In 2016 Freebase was incorporated into the Wikidata platform and shut down by Google and is no longer maintained.

2.2.2 Games

adada

2.2.3 Interactive Natural Language Conversation

dada

2.3 Reasoning Acquisition

adad dada

2.4 Mining Acquisition

adad

2.5 Acquisition with the help of existing knowledge

adad

2.6 Crowdsourcing Acquisition

adad

2.7 Acquisition of Geospatial Context

adad

Chapter 3

Knowledge Acquisition Approach

This chapter introduces the terms, defines formal structure and steps that form our proposed KA approach. First it introduces the general architecture and steps involved in the process([ref to chapter](#)). In the second part, it formalizes the upper ontology and logical constructs required for the KA approach ([ref to chapter](#)). After that, each of the crucial steps is described in more detail through examples and additions to the base logical structure defined earlier.

3.1 Architecture

In this section we present the general architecture and workflow of the proposed system depicted also on 3.1, where arrows represent the workflow, squared boxes separate logical sub-systems and different colors representing functionality groups (see the figure legend).

We can see that the system and its user interaction loop are built around the knowledge base in the center (marked in purple and letter A in Figure 3.1). Around the KB, is an integrated Inference engine that can perform inference over the knowledge from the KB. This is represented with the red color and letter B. Tightly connected to the knowledge base and inference engine is a crowdsourcing module, which adds and removes knowledge from the KB based on its consistency among multiple users (Green color and letter F). At the entry and exit point of the systems workflow, there are natural language/logic converters, which are used for communication with the users (blue letter E). Besides the NL endpoints, the system also have a functional endpoint and support, which is used to be able to bring in additional language independent states, such as locations, structured knowledge, etc. In addition to this, the functional part of the application also brings in additional machine learning algorithms and support, and also serves as a glue for all the components, taking care of the interaction between submodules (represented with orange color and letter D). All the modules are triggered either through context (also internal like timer), when it changes, which then causes system to send a request to the user, or through user request directly. This is represented with the arrows, where the blue arrows represent natural language interaction and the orange one structured or functional interaction, where the phone part of the system is interacting automatically without direct user involvement.

3.1.1 Knowledge Base

Internally KB has three components. The main part, which should in any real implementation of the system also be the biggest, is the common-sense knowledge and its upper ontology over which we operate. This part of the system contributes the most to the ability to check the answers for consistency. The more knowledge already exists, the easier

becomes to assess the answers. The second part is the user Context KB, which stores the contextual knowledge about the user. This covers the knowledge that the user has provided about himself (section 4.4.2) and the knowledge obtained by mining raw mobile sensors (section 4.4.1). This is represented as the orange arrow, pointing into the context part of the KB. The sensor based context allows the system to proactively target the right users at the right time and thus improve the efficiency and accuracy and also stickiness of the KA process. The third KB part, is the meta-knowledge and KA rules that drive the dialog and knowledge acquisition process (section 4.3.3). Although in our implementation we used Cyc KB and tested Umko KB, the approach is not fixed to any particular knowledge base. But it needs to be expressive enough to be able to cover the intended knowledge acquisition tasks and meta-knowledge needed for the system's internal workings. After the KB, the second most important part of the architecture is an inference engine (in Fig. 2 marked in red and letter B), which is tightly connected to the knowledge base. The inference engine needs to be able to operate with the concepts, assertions and rules from the KB and should also be capable of meta-reasoning about the knowledge base's internal knowledge structures. As the individual components (indicated with red color in Fig. 2) suggest, the inference engine is used for: ? Checking the consistency of the users' answers (e.g., can you order a car in a restaurant if it's not food?). ? Placement of new knowledge inside the KB. ? Querying the KB to answer possible questions. ? Using knowledge and meta-rules to produce responses based on the user and her/his context input (similar in function to the scripts in script-based conversational agents).

Fig. 2. General Architecture of the KA system, with a simple interaction loop At both ends of the stacked chain in Fig. 2, there are natural language processing components (marked in blue and with letter E), which are responsible for logic-to-language and language-to-logic conversion (sections 2.4 and 4.5). These are crucial if we want to interact with users in a natural way and thus avoid the need for users to be experts in first order logic. This module and its components are described in more detail in section 4.5. Besides the main interaction loop, which implicitly uses crowdsourcing while it interacts with the users, there is an additional component (marked in green and with letter F). This 'crowdsourcing and voting' component handles and decides, which elements of knowledge (logical assertions) can be safely asserted and made 'visible' to all the users and which are questionable and should stay visible only to the authors of the knowledge. If the piece of knowledge is questionable, the system marks it as such and then the question formulation process will check with other users whether it's true or not. This is described in more detail in section 4.7. In addition to logic-based components presented above, there is a functional driver system (marked in orange), which glues everything together, forwards the results of inference to the NL converters, accepts and asserts the context into the KB, handles the synchronization between the instances of the systems, etc.

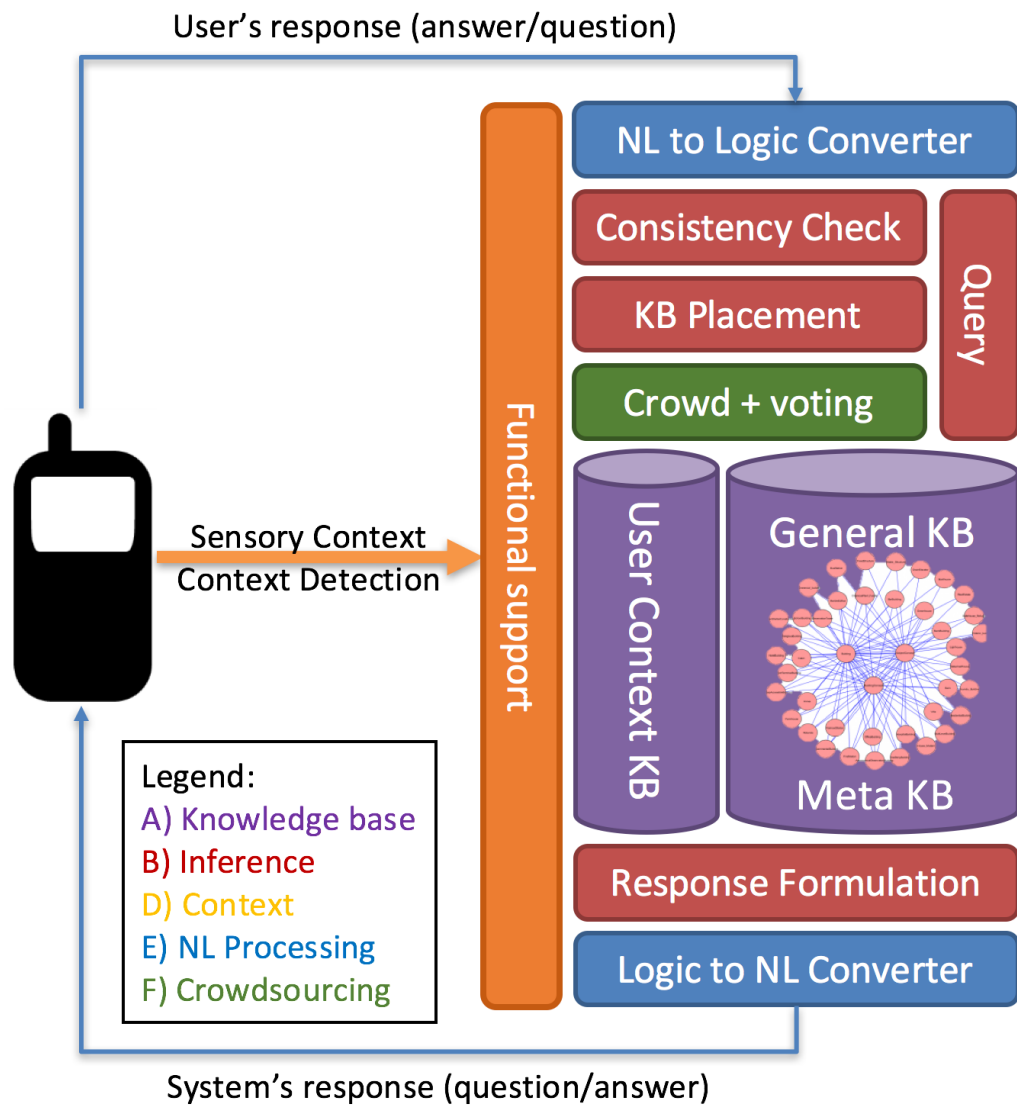


Figure 3.1: General Architecture of the KA system, with a simple interaction loop.

Chapter 4

Real World Knowledge Acquisition Implementation

4.1 Cyc

TBW

Chapter 5

Evaluation

TBW

chapters that

Chapter 6

Conclusions

We came to the following conclusions . . .

Appendix A

Proofs of Theorems

A.1 Proof of the Pythagorean Theorem

Let us prove the Pythagorean Theorem from page ??.

Proof. This proof is based on the proportionality of the sides of two similar triangles, that is, upon the fact that the ratio of any two corresponding sides of similar triangles is the same regardless of the size of the triangles.

Let ABC represent a right triangle, with the right angle located at C , as shown in Figure A.1. We draw the altitude from point C , and call H its intersection with the hypotenuse AB . Point H divides the length of the hypotenuse into two parts.




Figure A.1: Similar triangles used in the proof of the Pythagorean theorem.

The new triangle ACH is similar to triangle ABC , because they both have a right angle (by definition of the altitude), and they share the angle at A , meaning that the third angle will be the same in both triangles as well, marked as θ in Figure A.1. By a similar reasoning, the triangle CBH is also similar to ABC .

Similarity of the triangles leads to the equality of ratios of corresponding sides:

$$\frac{BC}{AB} = \frac{BH}{BC} \text{ and } \frac{AC}{AB} = \frac{AH}{AC}. \quad (\text{A.1})$$

The first result equates $\cos \theta$ and the second result equates $\sin \theta$.

These ratios can be written as:

$$BC^2 = AB \times BH \text{ and } AC^2 = AB \times AH. \quad (\text{A.2})$$

Summing these two equalities, we obtain:

$$BC^2 + AC^2 = AB \times BH + AB \times AH = AB \times (AH + BH) = AB^2, \quad (\text{A.3})$$

which, tidying up, is the Pythagorean theorem:

$$BC^2 + AC^2 = AB^2. \tag{A.4}$$

□

References

- Bollacker, Kurt et al. (2008). “Freebase: A Collaboratively Created Graph Database for Structuring Human Knowledge.” In: *Proceedings of the 2008 ACM SIGMOD International Conference on Management of Data*. SIGMOD ’08. New York, NY, USA: ACM, pp. 1247–1250. ISBN: 978-1-60558-102-6. DOI: 10.1145/1376616.1376746. URL: <http://doi.acm.org/10.1145/1376616.1376746>.
- Dong, Zhendong, Qiang Dong, and Changling Hao (2010). “HowNet and Its Computation of Meaning.” In: *Coling 2010* August, pp. 53–56. DOI: 10.1142/9789812774675.
- Feigenbaum, E. A. (1977). “The Art of Artificial Intelligence: Themses and Case Studies of Knowledge Engineering.” In: *Proceedings of the 5th International Joint Conference of Artificial itelligence*, pp. 1014–1029.
- Kuo, YL and JY Hsu (2010). “Goal-Oriented Knowledge Collection.” In: *AAAI Fall Symposium: Commonsense Knowledge*, pp. 64–69. URL: <http://www.aaai.org/ocs/index.php/FSS/FSS10/paper/viewPDFInterstitial/2278/2605>.
- Lenat, Douglas Bruce (1995). “Cyc: A Large-Scale Investment in Knowledge Infrastructure.” In: *Communications of the ACM* 38.22.
- Matuszek, Cynthia et al. (2006a). “An Introduction to the Syntax and Content of Cyc.” In: *Proceedings of the 2006 AAAI Spring Symposium on Formalizing and Compiling Background Knowledge and Its Applications to Knowledge Representation and Question Answering*. AAAI Press.
- (2006b). “An Introduction to the Syntax and Content of Cyc.” In: *Proceedings of the 2006 AAAI Spring Symposium on Formalizing and Compiling Background Knowledge and Its Applications to Knowledge Representation and Question Answering*. AAAI Press.
- Mueller, Erik T (1999). *A database and lexicon of scripts for ThoughtTreasure*. Vol. 1999. CogPrints ID cog00000555 <http://cogprints.soton.ac.uk>, Article No. 0003004.
- (2003). *ThoughtTreasure: A natural language/commonsense platform*. URL: <http://alumni.media.mit.edu/%7B~%7Dmueller/papers/tt.html> (visited on 01/01/2017).
- Panton, Kathy et al. (2002). “Knowledge Formation and Dialogue Using the KRAKEN Toolset.” In: *Proceedings of the Fourteenth National Conference on Innovative Applications of Artificial Intelligence*, pp. 900–905.
- Pedro, S D S, A P Appel, and E R Hruschka Jr (2013). “Autonomously reviewing and validating the knowledge base of a never-ending learning system.” In: *Proceedings of the 22nd ...* pp. 1195–1203. ISBN: 9781450320382. URL: <http://dl.acm.org/citation.cfm?id=2488149>.
- Sharma, Abhishek and KD Forbus (2010). “Graph-Based Reasoning and Reinforcement Learning for Improving Q/A Performance in Large Knowledge-Based Systems.” In: *2010 AAAI Fall Symposium Series*, pp. 96–101. ISBN: 9781577354840. URL: <http://www.aaai.org/ocs/index.php/FSS/FSS10/paper/download/2246/2596>.
- Singh, Push (2002). “The Public Acquisition of Commonsense Knowledge Push Singh The Diversity of Commonsense Knowledge.” In: *AAAI Spring Symposium: Acquiring (and*

- Using) Linguistic (and World) Knowledge for Information Access*, pp. 47–53. URL: <http://www.aaai.org/Papers/Symposia/Spring/2002/SS-02-09/SS02-09-011.pdf>.
- Singh, Push et al. (2002). “Open Mind Common Sense: Knowledge acquisition from the general public.” In: *Cooperative Information Systems Oct. 30-Nov. 1 2002*, pp. 1223–1237. ISSN: 03029743. DOI: 10.1007/3-540-36124-3_77. URL: <http://portal.acm.org/citation.cfm?id=646748.701499>.
- Speer, Robert (2007). “Open mind commons: An inquisitive approach to learning common sense.” In: *Proceedings of the Workshop on Common Sense and Interactive Applications*. URL: <http://www.fatih.edu.tr/%7B~%7Dhugur/inquisitive/Open%20Mind%20Commons%20An%20Inquisitive%20Approach%20to.PDF>.
- Speer, Robert, Joshua Chin, and Catherine Havasi (2016). “ConceptNet 5.5: An Open Multilingual Graph of General Knowledge.” In: Singh 2002. arXiv: 1612.03975. URL: <http://arxiv.org/abs/1612.03975>.
- Speer, Robert, Jayant Krishnamurthy, et al. (2009). “An interface for targeted collection of common sense knowledge using a mixture model.” In: *Proceedings of the 14th International Conference on Intelligent User Interfaces*, pp. 137–146. DOI: 10.1145/1502650.1502672.
- Speer, Robert, Henry Lieberman, and Catherine Havasi (2008). “AnalogySpace : Reducing the Dimensionality of Common Sense Knowledge.” In: *AAAI’08 Proceedings of the 23rd national conference on Artificial intelligence*, pp. 548–553. ISBN: 9781577353683.
- Witbrock, Michael (2010). “Acquiring and Using Large Scale Knowledge Knowledge Capture : Mixed Initiative.” In: *Proceedings of the ITI 2010, 32nd International Conference on Information Technology Interfaces*. Cavtat/Dubrovnik, pp. 37–42. URL: <http://ieeexplore.ieee.org/document/5546360/?reload=true%7B%5C%7Dtp=%7B%5C%7Darnumber=5546360>.
- Witbrock, Michael, David Baxter, et al. (2003). “An Interactive Dialogue System for Knowledge Acquisition in Cyc.” In: *Proceedings of the Eighteenth International Joint Conference on Artificial Intelligence*. Acapulco, Mexico.
- Witbrock, Michael, Cynthia Matuszek, et al. (2005). “Knowledge Begets Knowledge: Steps towards Assisted Knowledge Acquisition in Cyc.” In: *AAAI Spring Symposium: Knowledge Collection from Volunteer Contributors*, pp. 99–105. URL: <http://www.aaai.org/Papers/Symposia/Spring/2005/SS-05-03/SS05-03-015.pdf>.
- Zang, Liang-Jun et al. (2013). “A Survey of Commonsense Knowledge Acquisition.” In: *Journal of Computer Science and Technology* 28.4, pp. 689–719. ISSN: 1000-9000. DOI: 10.1007/s11390-013-1369-6. URL: <http://link.springer.com/10.1007/s11390-013-1369-6>.

Bibliography

Publications Related to the Thesis

All publications related to the thesis should be referenced in the text.

Other Publications (optional)

...

Biography

The author of this thesis . . .

