



COS 301 - SOFTWARE ENGINEERING



HOME SECURITY SYSTEM (ARGUS)

SYSTEM REQUIREMENT SPECIFICATION

Initials and Surname	Student Number
B. Chu	u18176951
B.A. Zietsman	u15228194
B.R. Fourie	u16024002
J.K. Lutz	u15323413
J.S. Stadler	u16008554
S. Vermeulen	u16078625

Contents

1	Introd	uction
	1.1	Purpose of the System
	1.2	Scope of the System
	1.3	Vision
	1.4	User Characteristics
2	Archit	ectural design
	2.1	Deployment model
	2.2	Architectural Diagrams
3	Non-fi	unctional Requirements
	3.1	Quality Requirements
	3.2	Architectural Constraints
	3.3	Technological Requirements
	3.4	Protocols
4	Functi	onal Requirements
	4.1	User Story
	4.2	Use cases
	4.3	Use-case diagram
	4.4	System Traceability Matrix
	4.5	Actor-System interaction models
	46	Domain Model 25

1 INTRODUCTION

1.1 PURPOSE OF THE SYSTEM

This document is used to outline the requirements of the 'Home Security System' which will be used by homeowners to better protect their homes through threat detection.

1.2 SCOPE OF THE SYSTEM

- Abilities and Constraints:
 - 1. The system will provide administrator functionality which allows an administrator to add or remove users that are authorized to view the system.
 - 2. The system will allow authorized users to view a live camera feed.
 - 3. All people and vehicles on the live feed will be classified as white-listed(known), grey-listed(unknown) or black-listed(threats).
 - 4. The system will keep a record and snapshot of all grey and blacklisted classifications.
 - 5. The system will send an email notification of every blacklisted classification.
 - 6. A web application will be used as the human interface for this system
- Goals and Benefits: The system will alert the owner to potentially unwanted people and vehicles on their property by using constant image classification on multiple video feeds to identify all people and vehicles and compare them to a white-list. The main benefit of this system will be a higher sense of security surrounding the owners' home.

1.3 VISION

Our vision is to create a secure system capable of instantly identifying threats on multiple video feeds around the home of a user while notifying the user of identified threats. This will be achieved within the 4 month time period we have allocated.

1.4 USER CHARACTERISTICS

The user should be computer literate. The user should also be able to use a smartphone and know how to navigate a simple app. They should have internet connection to be able to access the web application, have their cameras connect to the Argus system and access it on their smartphone. The user must have at least one security camera. The system will be used for home security purposes and is therefore targeted at home owners.

• Home Owners:

- Are the people looking to improve their security and control of who is on their property.
 This user's technical skills will vary from novices to well versed but the system will accommodate for this.
- Are expected to be between the ages of 20-60
- Are expected to use the full range of features included in our system.
- Expected to be our primary user group.

• Business Owner:

- Are the people looking to improve their security and control of who is on their property.
- May not be technically skilled but will likely have a IT assistant who will know how to use the system
- As many new customers will enter on a daily basis, this user may want to turn off any alerts while open and rather be alerted of suspicious behaviour once they have locked up for the day.

2 ARCHITECTURAL DESIGN

2.1 DEPLOYMENT MODEL

Description Shown in Figure 1, the deployment model has three components namely, Heroku Server, Raspberry Pi and a generic computational device. The **web application component** will run on a Javascript run-time environment. The server will include several artifacts, including the database server that manages all user accounts. For Server.js will require certain supporting artifacts such as:

- server.js Server framework tool
- package.json Handles system dependencies and holds metadata for the system
- App.js Our app we are making to control server requests and allow users to view their cameras and flagged threats.

The **generic computational component** with its corresponding operating system, will have a Javascript Run-time environment running the following artifacts:

- webapp.html HTML will be used to program the dashboard and to create an interface to interact with the system. CSS will be incorporated to make the web application as visually appealing as possible.
- webapp.js JavaScript will be used to implement all the functions that will generate the functionality required by the dashboard web application.

Within the **Raspberry Pi component** acts as a camera controller, where a limited amounts of ports for available for camera connections. This Raspberry Pi device has a Raspbian operating system where the Postgres Database and Javascript Run-time Environment will run on. The local Postgres database contains the following schemas for the systems home area:

- People A list of recognized persons
- Footage Saved camera footage of certain detections
- Vehicles A list of recognized vehicles and their number plates
- Local-users A list of users that may use the system

The following artifacts are used in the JRE:

- monitor.jar the Library used for management for memory and the Convolutional Neural Network
- nd4j.jar the Library for artificial intelligence learning in Convolutional Neural Networks

• cnn-model.h5 - An exported JSON format Keras model that contains the trained neural network with its corresponding weights for detecting things in camera footage.

The **Heroku Server** device uses a TCP/IP and UDP connection between itself and the Raspberry PI as well as the Generic Computational Device. The Heroku server contains a Heroku VM where the Postgres database for user accounts and JavaScript execution environment. The Javascript Environment contains the following:

- node.js
- server.js
- app.js
- package.json

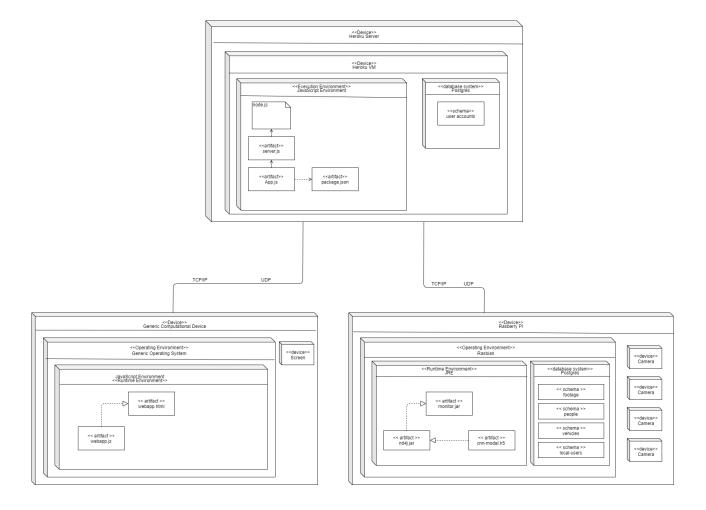


Figure 1: Deployment Model

2.2 ARCHITECTURAL DIAGRAMS

Description Shown in Figure 2, the system will work on a 4-tier system. On the 1st tier, the presentation layer, the web dashboard will be contained. Within the presentation layer will be the view of the MVC system, where all of the user interaction will take place with the system. These interactions include an interface for the interface for a user to log into the Argus system, an interface for camera interaction, an interface for creating profiles and an interface for user management.

Moving down a layer to the Logical layer, the controller of the MVC is found. The controller will be all of the interactions possible of the user with the web dashboard as well as the system. Hence users will be able to log in or out of the system, upload photo's of people/objects and assigning user roles. Within the Logical layer, will be the camera(also a controller to a different MVC model) that drives the whole camera feed of the system.

Moving down a tier to the Database layer, 2 different databases are found. One database will be used for user profile management and one will be used for storing camera specific data. Both of these databases are also part of the model (2 different ones) of the MVC structure.

Three protocols are also found in the Network Communication Layer, 2 for handling HTTPS requests and one FTP request for sending data to the camera database.

The logical flow of each component is as follows:

One separate MVC handles the camera interaction of the system. The camera is connected to the web dashboard where the user can handle all of the camera's interactions. If a user then wishes, the user can specify to save specific camera data, and that will be sent to the Camera feed database.

On the other MVC model, there is a web dashboard for the user to interact with the system. All of the user interactions are then part of the Controller of the MVC that talks to the web dashboard view. All user related data, adding profiles, user management etc., will then be stored onto the User profile database.

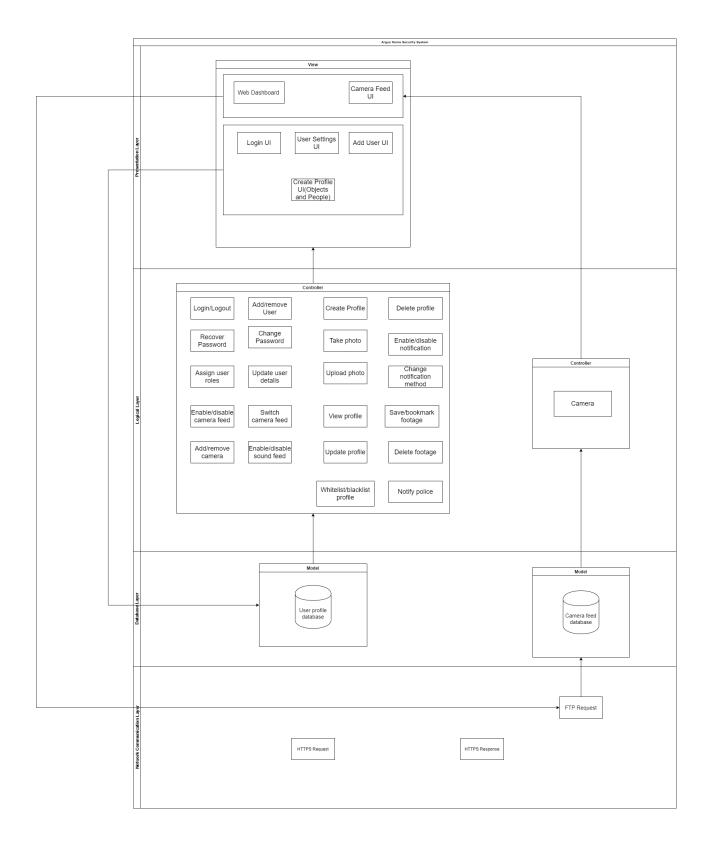


Figure 2: Architectural Diagram

3 NON-FUNCTIONAL REQUIREMENTS

3.1 QUALITY REQUIREMENTS

Maintainability

The application must be kept up-to-date with changing technologies and must be as modular as possible to remove complexity of replacing old programming with new. Updates must also take into consideration user grievances such as having a review page where users can comment on features they are unhappy with. This allows for a continuous cycle of deployment which is key in maintainability of software systems.

Performance

Performance is a measure of how well the software responds to any circumstance the application may encounter and the speed at which it does so. The response time between components is a key metric in measuring performance. The main performance requirement for the system is the facial recognition and ability to alert the user of suspicious activity. In order to ensure top performance the application should be thoroughly tested under straining circumstances.

Reliability

It is important that the application does what is promised to the user: alert them of any suspicious behaviour, people or cars on their property. The software will need to accurately distinguish between suspicious and non-suspicious activity. This quality requirement refers to the ability of the system to work as expected and maintain its functionality over the course of its expected life time. Load and Regression Testing will be used routinely to test availability of the system under stress and a lack of bugs after updates, which is targeted at 95 percent.

Security

A users personal information is important and should remain confidential. A secure connection should be guaranteed while the user is connected to website and their information must be stored encrypted on both the client and server side. This would include log in details. User passwords will have a strict password requirement (i.e at least: 1 capital letter, 1 special character, 1 number and 1 lower case letter). The website must be up to date and secure to prevent any hack to jeopardise the users information.

Scalability

This quality refers to the systems ability to expand and be scale its user base while maintaining all its other quality requirements in an effective and efficient manner. The system must be prepared for initially small numbers of users, but must be able to constantly scale up server capacity in order to guarantee little to no strain on the servers as the number of users increase. The system is divided into different independent components that can each be load tested individually to determine the system response time, throughput rates, utilization of resources and its breaking point. The aim is to have the system process the captured video or audio, determine if a threat is present via the neural network and alert the user if need be within a 10 second response time.

Usability

The user should be able to understand and learn how to use the system without requiring help from the developers. The systems most important features should be within reach of the main screen of the dashboard so that the user does not need to search around for functionality. The user must be able to navigate through menu items and find what they need as easily as possible. The interface of the system must be as simple as possible so as to not discourage users from using the system and so that the system is also visually enticing to use. The response time of the system must be as fast as possible to render all the notifications useful and to ensure that the system works as intended.

3.2 ARCHITECTURAL CONSTRAINTS

Hardware constraints

The maximum number of cameras will be determined by the internet speed at hand as well as the speed of the neural network and database connections. This is due to the response time of the system being set to a maximum of 10 seconds to ensure the validity and integrity of notifications and events from the system. The quality of the video feed is set to a maximum of 720p to allow a balance between quality and processing speed, however this can be reduced while no movement is picked up by the camera to reduce the load on the system. Storage space should hold large amounts of data for video data. The storage spaces should provide support to keep 1.5GB per hour, where a day will be 36GB. A week of the footage must be saved, where some will be saved and the rest deleted. Some common video and audio codecs such as .mp4 and .mp3 must be supported. The system must be able to run on a Linux server(Ubuntu/OpenSUSE). The app should be usable on the latest Chrome and Firefox browsers and be responsive/mobile friendly.

3.3 TECHNOLOGICAL REQUIREMENTS

- Neural Network Python, TensorFlow
- Web Application HTML, CSS, JavaScript
- Database Postgres
- Event Handler RabbitMQ
- HTTPS This application protocol will be used for communication between the web application the Heroku server. It was chosen over HTTP due to its secure nature. Security is important as login details need to saved on the web server.

3.4 PROTOCOLS

The following protocol types will be used in the home security system:

- HTTPS protocol will be preferred for displaying the Web dashboard in order to ensure that web-page is as secure as possible on the user's side when displayed
- HTTP will be used as an alternative to HTTPS if no security certificate for the web dashboard is provided.
- POP3 protocols will be used for sending notifications via email to the user.
- FTP will be used for the transmission of video data from the camera to the Web dashboard or the database.

4 FUNCTIONAL REQUIREMENTS

- R1: Web dashboard for the security system
 - R1.1: The web dashboard will provide an interface to interact with the camera/s.
 - * R1.1.1: The web dashboard will allow for enabling and disabling of camera live feeds.
 - R1.2: The web dashboard will provide functionality for notification management.
 - * R1.2.1: The dashboard will allow for the enabling/disabling of notifications.
 - * R1.2.2: The dashboard will allow the type of notification method to be changed sending to the user.
 - R1.3: The dashboard will allow for the creation of profiles.
 - * R1.3.1: The dashboard will allow creation of a person's profile in the system.
 - * R1.3.2: The dashboard will allow to take a photo for a person's profile face
 - * R1.3.3: The dashboard will allow to upload a photo for person's profile face
 - R1.4: The dashboard will allow for profile management.
 - * R1.4.1: The dashboard will allow for a person's profile or number plate to be retrieved and viewed from the system.
 - * R1.4.2: The dashboard will allow for a person's profile or number plate to be marked as white-listed on the system.
 - * R1.4.3: The dashboard will allow for a person's profile or number plate to be marked as black-listed on the system.
 - * R1.4.4: The dashboard will allow for a person's profile or number plate to be removed from the system.
 - R1.5: The dashboard will allow for user role management.
 - * R1.5.1: The dashboard allows for admin roles
 - · R1.5.1.1: Admins will be allowed to add and remove users to/from the database(either Admin, Advanced, Basic user) via the dashboard.
 - · R1.5.1.2: Admin users will be allowed to trigger alarms on the system via the dashboard.
 - · R1.5.1.3: Admin users will be allowed to add in cameras to the system(camera management allowed).
 - * R1.5.2: The dashboard allows for advanced roles
 - · R1.5.2.1: Advanced users will be allowed to add in users onto the database(either Advanced, Basic user) via the dashboard.
 - * R1.5.3: The dashboard allows for basic roles.
 - · R1.5.3.1: Basic users will be allowed to view camera footage from the camera/s.
 - · R1.5.3.2: Basic users will be allowed to receive notifications from the system.
 - R1.6: The dashboard will allow for user management.
 - * R1.6.1: The system will allow for a user to log on to the system.
 - * R1.6.2: The system will allow for a user to logout of the system.

- R2: Real-time monitoring of camera feed.
 - R2.1: The camera/s monitoring will provide imagery.
 - R2.2: The camera/s monitoring will provide sound.
 - R2.3: The camera/s monitoring will take pictures of detected faces or number-plates.
 - R2.4: The camera/s monitoring will allows to either add or remove camera's.
- R3: Facial detection and classification (strangers vs. known people)
 - R3.1: The system will intelligent be able to identify people.
 - * R3.1.1: The system will be able to identify high level threat people.
 - * R3.1.2: The system will be able to identify unknown or known people.
 - R3.2: The system will be able to identify objects.
 - * R3.2.1: The system will be able to identify high level threat vehicles.
 - * R3.2.2: The system will be able to identify unknown or known vehicles.
- R4: Unusual behaviour detection.
 - R4.1: The system will detect if a person is walking around at unusual times.
 - R4.2: The system will detect if a person is holding dangerous objects.
 - R4.3: The system will detect if an unknown person is walking around the premises an unusual amount of times.
- R5: Notification system
 - R5.1: The system will send notifications if an unknown person was detected.
 - R5.2: The system will send notifications if unusual behaviour was detected.
 - R5.3: The system will send notifications if footage is bookmarked/saved.
 - R5.4: The system will send notifications if footage was removed.
 - R5.5: The system will activate the alarm, which will then notify the user's security company.

4.1 USER STORY

ADMIN USER

- As an **admin** I want to **switch on** the system to **use** all its functionality.
- As the admin I want to switch off the system to stop using its functionality
- As the **admin** I want to **change** my password so that I can **login** to the system with a new password.
- As the **admin** I want to **recover** my password so that I can remember the password and **login** to the system.
- As the **admin** I want to **add** an admin, advanced or basic **user** so that they are able to use some of the system functionality.
- As the **admin** I want to **update** my **user** details in the system.
- As the **admin** I want to **remove** a user so that they no longer have system functionality.
- As the **admin** I want to **change** the users role to admin, advanced or basic so they can have **different limitations** to the system functionality.

ADVANCED USER

- As an **advanced user** I want to **switch on** the system to **use** some of its functionality.
- As the **advanced user** I want to **switch off** the system to **stop** using its functionality.
- As the **advanced user** I want to **change** my password so that I can **login** to the system with a new password.
- As the **advanced user** I want to **recover** my password so that I can remember the password and **login** to the system.
- As the **advanced user** I want to **add** a **basic user** so that they are able to use the system functionality.
- As the **advanced user** I want to **update** my **user** details in the system.
- As the **advanced user** I want to **remove** my account so that I no longer have system functionality.

BASIC USER

- As a **basic user** I want to **switch on** the system to **use** some of its functionality.
- As a **basic user** I want to **switch off** the system to **stop** using its functionality.
- As a **basic user** I want to **change** my password so that I can **login** to the system with a new password.
- As the **basic user** I want to **recover** my password so that I can remember the password and **login** to the system.
- As a **basic user** I want to **remove** my account so that I no longer have system functionality.

CAMERA

- As an **admin**, **advanced or basic user** I want to **switch on** the cameras to **view** the camera footage.
- As an **admin**, **advanced or basic user** I want to **switch off** the cameras to **stop** the camera footage.
- As an **admin user** I want to **add** cameras to **view** more camera footage.
- As an **admin user** I want to **remove** cameras to **view no or less** camera footage.
- As the **admin, advanced or basic user** I want to **turn on** the camera's sound to **listen** to the camera footage.
- As the admin, advanced or basic user I want to turn off the camera's sound to stop listening to the camera footage.

PERSON

- As an **admin or advanced user** I want to **create** a person's profile so that their details can be **recognised** by the system.
- As an **admin or advanced user** I want to **take a picture** of a person with the camera so that the system can **save** it to their profiles.
- As an **admin or advanced user** I want to **upload** an existing picture of a person so that the system can **save** it to their profiles.
- As an **admin or advanced user** I want to **update** a person's profile so that their details are **up to date** and correct.
- As an **admin or advanced user** I want to **change** a person's profile to be white-listed so that the system can **recognize** friendly persons in the camera footage
- As an **admin or advanced user** I want to **change** a person's profile to be black-listed so that the system can**recognize** a threat from detected person in camera footage.
- As an admin or advanced user I want to view a person's profile so that I can analyse it.
- As an **admin**, **advanced user** I want to **delete** a person's profile so that they are **removed** by the system.

Number-plate Subsystem

- As an **admin**, **advanced user** I want to **add** a vehicle's number-plate so that the system can **recognize** a known vehicle in the camera footage.
- As an **admin**, **advanced user** I want to **white-list** a vehicle's number-plate so that the system can **recognize** known vehicle in the camera footage.
- As an **admin**, **advanced user** I want to **black-list** a vehicle's number-plate so that the system can **recognize** threat vehicles in camera footage.
- As an user I want to view a vehicle's number-plate profile so that I can analyse it
- As an **admin**, **advanced user** I want to **update** a vehicle's number-plate profile so that the details are **up to date** and correct
- As an **admin or advanced user** I want to **delete** a vehicle's number-plate profile so that it is **removed** by the system

NOTIFICATION

- As an **admin, advanced or basic user** I want to **receive notifications** when something is detected on the system so that I am **aware** of what is being detected around the home area.
- As an **admin**, **advanced or basic user** I want to **stop notifications** when something is detected on the system so that the system **stops detecting** around the home area.
- As an **admin, advanced or basic user** I want to **choose** what method of notification the system sends me so that I receive notifications that is **convenient to my communication** with the system.
- As an **admin, advance, or basic user** I want to **view** the footage history on the system so that I can **see** the footage.
- As the **admin user** I want to **save** footage that the notification defined so that I can **retrieve** the footage at a later stage.
- As the admin user I want to delete footage that it is non-existent on the system
- As the **admin**, **advanced or basic user** I want to be able to **activate** alarm in case of an emergency due to a **notification** from the system

4.2 USE CASES

• U1: User Subsystem

- U1.1: Login
- U1.2: Logout
- U1.3: Change password
- U1.4: Recover password
- U1.5: Add user
- U1.6: Update user details
- U1.7: Remove user
- U1.8: Assign user roles

• U2: Camera Subsystem

- U2.1: Switch between camera feeds
- U2.2: Enable/Disable camera feed
- U2.3: Add camera
- U2.4: Remove camera
- U2.5: Enable/Disable sound

• U3: Person Subsystem

- U3.1: Create person profile
 - * U3.1.1: Take picture
 - * U3.1.2: Upload picture
- U3.2: Retrieve/View person profile
- U3.3: Update person profile
 - * U3.3.1: White-List profile
 - * U3.3.2: Black-List profile
- U3.4: Delete person profile

• U4: Vehicle Subsystem

- U4.1: Create Vehicle profile
- U4.2: Retrieve/View Vehicle profile
- U4.3: Update Vehicle profile
 - * U4.3.1: Change Vehicle numberplate
 - * U4.3.2: White-List profile
 - * U4.3.3: Black-List profile
- U4.4: Delete Vehicle profile

• U5: Event Subsystem

- U5.1: Enable/Disable notifications
- U5.2: Change notification method
- U5.3: Bookmark/Save footage
- U5.4: Retrieve/View footage history
- U5.5: Delete footage
- U5.6: Activate alarm

4.3 USE-CASE DIAGRAM

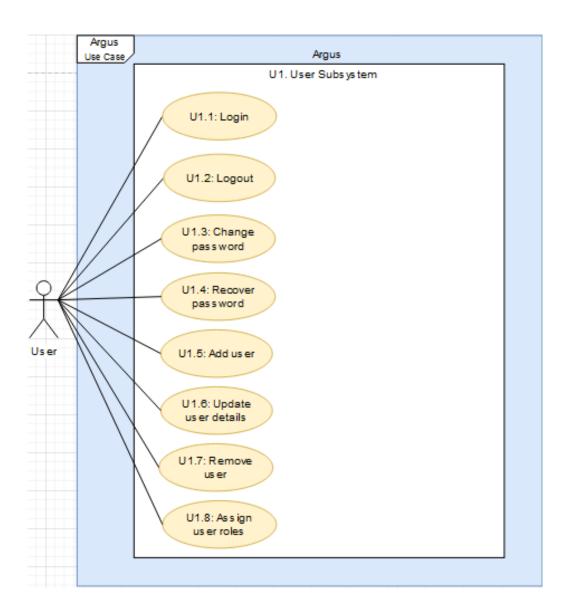


Figure 3: User Subsystem

Description Figure 3 shows the use cases for the user management subsystem. Depending on the role of the user he/she will have specific privileges. All users will be able to login(U1.1) and logout(U1.2) of the system. Once logged in he/she will be able to update user details(U1.6) as well as change their password(U1.3) however, if the user logs out and forget his/her password meaning they couldn't log back in to the system there's a option to recover the password(U1.4) which will the ask user to enter in his/her username and then proceed to send them an email with their password attached. If however, the the user is an Admin user he/she and wishes to add a family member of business colleague to the system they have the option of adding a user(U1.5) and assigning them a role(U1.8) of either as Admin, Advanced or Basic user, each having different privileges. Admin users have complete control of the system including removing a user(1.7) entirely from the system, whilst other users can only remove themselves. Advanced users only have access to adding certain users but won't be able to make system changes like adding/removing of cameras and finally, Basic users can only see alerts and footage but are basically read-only. Something to note is that Admin users cannot remove other admin users only themselves also they cannot change other admin users details or roles.

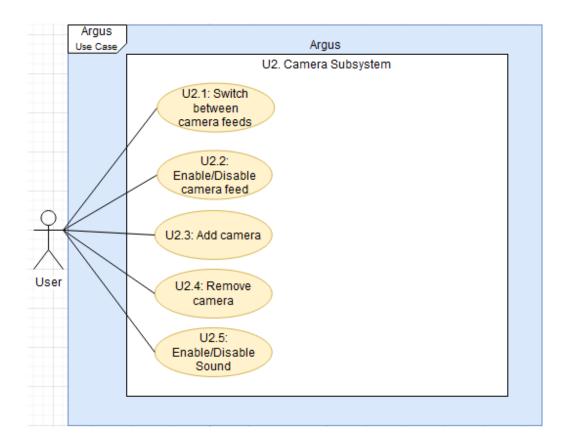


Figure 4: Camera Subsystem

Description Figure 4 shows the use cases for camera feed subsystem. A Admin/Advanced user can add(U2.3) camera or remove(U2.4) camera from the web dashboard. If multiple cameras are added the any user can switch between camera feeds(U2.1) by enlarging the one selected on the screen. He/she can Enable/Disable(U2.2) any feed or sound(U2.5) that was added to the web dashboard.

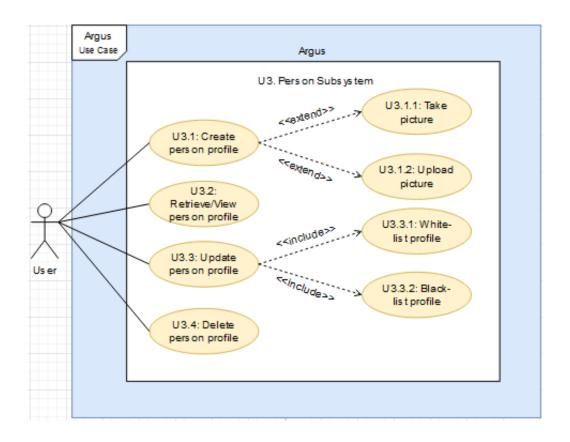


Figure 5: Person Subsystem

Description Figure 5 shows the use cases for the known/unknown person profile subsystem. A Admin/Advanced user should be able to create a person's profile(U3.1) by taking a photo(U3.1.1) of the person's face and uploading(U3.1.2) it to the system, the system should do this automatically for unknown people walking on the street using the camera feed. All users should be able to search for and retrieve(U3.2) a person's profile and in addition update(U3.3) their profile by marking them as either white-listed(U3.3.1) or black-listed(U3.3.2). Finally, if a user has the role of being Admin he/she can delete a person profile.

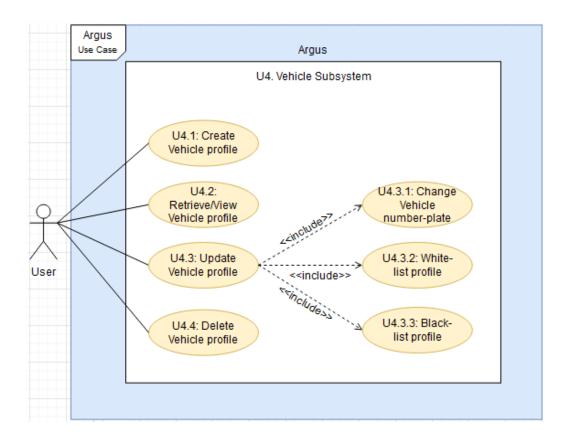


Figure 6: Vehicle Subsystem

Description Figure 6 shows the use cases for the known/unknown vehicle profile subsystem. A Admin/Advanced user should be able to create a number-plate profile(U3.1) by taking a photo(U3.1.1) of the vehicle's number-plate and uploading(U3.1.2) it to the system, the system should do this automatically for unknown vehicles driving on the street using the camera feed. All users should be able to search for and retrieve(U3.2) a vehicle's profile and in addition update(U3.3) the profile by marking it as either white-listed(U3.3.1) or black-listed(U3.3.2). Finally, if a user has the role of being Admin he/she can delete a vehicle profile.

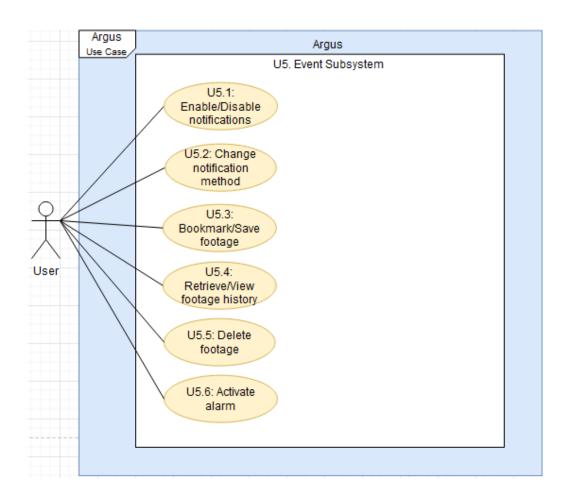


Figure 7: Event Subsystem

Description Figure 7 shows the use cases for the Event subsystem. The user will be able to receive notifications or not(U5.1). Change the type of notification method(U5.2) to either Email, SMS, popup etc. A Admin/Advanced user should be allowed to bookmark/save footage(U5.3) and retrieve/view(U5.4) it later else delete(U5.5) the footage. If an unknown user enters the property they should immediately be marked as Black-listed and the user should get a notification with the option to activate the alarm.

4.4 SYSTEM TRACEABILITY MATRIX

		User subsystem					Camera subsystem Person subsystem			n	Vehicle subsystem			Event subsystem														
	Priority	U 1.1	U 1.2	U 1.3	U 1.4	U 1.5	U 1.6	U 1.7	U 1.8	U 2.1	U 2.2	U2.3	U 2.4	U 2.5	U 3.1	U 3.2	U 3.3	U 3.4	U 4.1	U 4.2	U 4.3	U 4.4	U 5.1	U 5.2	U 5.3	U 5.4	U 5.5	U 5.6
B 1.1										Х																		
R 1.2																							×	×				
R 1.3															×													
B 1.4																×	×	×		X	X	×						
R 1.5						×	×	×		×	×	×	×	×									×		×	×	×	
R 1.6		×	×																									
R 2.1										×					×				×									
R 2.2														×														
R 2.3															×				X									
R 2.4												×	×															
R 3.1																	×											
R 3.2																					×							
R 4.1												×											×			×		×
R 4.2												×											×			×		×
R 4.3												Х											Х			Х		X
R 5.1												X											X			X	<u></u> '	×
R 5.2												Х					Х						Х			Х		×
R 5.3																									Х		L	
R 5.4														_													X	\vdash
R 5.5																											<u> </u>	×
	Priority																											

Figure 8: Traceability Matrix

Description Table 8 shows what use cases the user can interact with to satisfy the requirements that the system is capable of doing for the user. The priority indicates which use cases are most dependable on the functionality of the system requirements.

4.5 ACTOR-SYSTEM INTERACTION MODELS

The Actor-system interaction model describes the system's communication steps for functionality usage, so that a user participates as an actor that interacts with the system interface by understanding the steps process of all system functionality. The following are some use case narratives to explain some of the important use cases to the User, Person and Event subsystem.

USE CASE ID:	1.5		USE CASE TYPE	
USE CASE NAME:	Add user		Business Requirements:	
			System Design:	
PRIORITY:	Medium		System Analysis:	\checkmark
SOURCE:	Capstone – Home Security System			
PRIMARY ACTOR:	Admin, advanced user			
DESCRIPTION:	The user clicks the Menu Button in the Web Das Users Page opens. The user selects the Add Us completion. The user fills the form in and clicks th user in the system.	ers Button a	nd the system opens a <mark>User form</mark> for	
PRE-CONDITION:	User must be logged in.			
TRIGGER:	User wants to add a user to system to access cer	tain system o	apabilities.	
TYPICAL COURSE OF EVENTS:	Actor Action		System Response Manual Action Automated Action	
	Step 1: User clicks on Menu button in Web Dashboard Page and then clicks on Users button.	Step 2: Sys	stem displays User Page .	
	Step 3: User clicks the Add user button.	Step 4: Sys	stem displays an empty User form .	
	Step 5: User fills in the User form and clicks on the Done button.	user details	stem invokes U3.1 Create Person with s, for recognition in the system. stem saves user profile to system.	h the
ALTERNATE COURSES:				
POST-CONDITION:	A new user is added to the system		-	

Figure 9: U1.5 narrative

USE CASE ID:	1.8		USE CASE TYPE				
USE CASE NAME:	Assign user role		Business Requirements:				
			System Design:				
PRIORITY:	High		System Analysis:	\checkmark			
SOURCE:	Capstone – Home Security System						
PRIMARY ACTOR:	Admin						
DESCRIPTION:	The user clicks the Menu Button in the Web Dashboard Page then chooses the Users Button where the Users Page opens. The user selects the Assign user role Button and the system displays the users in the system. The user edits the role attribute of the user, from the option of admin, advance or basic user. The user clicks on the Done button and the system save the user with a new role.						
PRE-CONDITION:	A user must already exist in the system.						
TRIGGER:	User wants to change the user role to change the	ir capabilities	on the system.				
TYPICAL COURSE OF EVENTS:	Actor Action		System Response Manual Action Automated Action				
	Step 1: User clicks on Menu button in Web Dashboard Page and then clicks on Users button.	Step 2: Sys	stem displays User Page .				
	Step 3: User clicks the Assign user role button.	Step 4: Sys	stem displays the users in the system.				
	Step 5: User chooses a user and changes the role attribute to Advanced user.						
	Step 7: User clicks Done Button		System saves changes to user profile to system.				
ALTERNATE COURSES:	Alt-step 3 (1): User chooses a user and changes						
	Alt-step 3 (2): User chooses a user and changes the role attribute to Basic user.						
POST-CONDITION:	Existing user's role has changed with certain cap	abilities.					

Figure 10: U1.8 narrative

USE CASE ID:	3.1		USE CASE TYPE				
USE CASE NAME:	Create person profile		Business Requirements:				
			System Design:				
PRIORITY:	High		System Analysis:	$\sqrt{}$			
SOURCE:	Capstone – Home Security System		AC 30				
PRIMARY ACTOR:	Admin, advanced user						
DESCRIPTION:	The user is on Web Dashboard Page and clicks on the People button in a side menu bar. The People Page opens, and the user clicks on the Create Person Button and fills in the user details that the system provides. The used takes a picture or uploads the picture of the person to the system. The user can also change the status of person (white-list and black-list). The user then clicks on the Done Button and the system saves the person profile.						
PRE-CONDITION:	The user must be logged in.						
TRIGGER:	The user wants to add a person to the system so with an event response as a threat or friend.	that the syste	m can recognise them in the camera	footage			
TYPICAL COURSE OF EVENTS:	Actor Action		System Response Manual Action Automated Action				
	Step 1: User clicks on People Button in the Web Dashboard Page.	Step 2: The	e system displays the People Page .				
	Step 3: The user clicks on the Create Person Button.	Step 4: Sys	stem provides a Create Person form n.	for the			
	Step 5: The user clicks on Take picture button.	Step 6: Sys	tem invokes U3.1.1 Take picture				
	Step 7: The user clicks on the White-List Button Step 8: invokes U3.3.1 White-list Profile.						
	Step 9: The user fills in the rest of the person's details and clicks on the Done Button .	Step 10: System saves the person profile to the system.					
ALTERNATE COURSES:	Alt-step 5-6: The user clicks on Upload picture I			29 C VOC-3 C29 I			
	Alt-step 7-8: The user clicks on the White-list Button and the system invokes U3.3.2 Black-list Profile						
POST-CONDITION:	A new person is added to the system to be recogn	nised and det	ected in camera footage.				

Figure 11: U3.1 narrative

USE CASE ID:	3.3		USE CASE TYPE	
USE CASE NAME:	Update person profile		Business Requirements:	
			System Design:	
PRIORITY:	High		System Analysis:	$\sqrt{}$
SOURCE:	Capstone – Home Security System			
PRIMARY ACTOR:	Admin, advanced user			
DESCRIPTION:	The user is on Web Dashboard Page and clicks Page opens, and the user clicks on the Update P the user to change the details. The user then click to the person's profile.	erson Butto	n. The system opens the details and a	allows
PRE-CONDITION:	A person must already exist on the system to upd	ate.		
TRIGGER:	The user wants to change an existing person's de	tails in the sy	ystem.	
TYPICAL COURSE OF EVENTS:	Actor Action		Actor Action	
	Step 1: User clicks on People Button in the Web Dashboard Page in the sidebar menu.	Step 2: The	e system displays the People Page .	
	Step 3: The user clicks on the Update Person Button.	Step 4: Sys	stem provides <u>a</u> Update Person form	for the
	Step 5: The user makes the changes to the person's details and clicks on the Done Button .	Step 6: System onto the sy	stem saves the changes to the person stem.	profile
ALTERNATE COURSES:				
POST-CONDITION:	An existing person's profile is updated in the syste	em.		·

Figure 12: U3.3 narrative

USE CASE ID:	5.1		USE CASE TYPE			
USE CASE NAME:	Enable/Disable notifications		Business Requirements:			
			System Design:			
PRIORITY:	High		System Analysis:	\checkmark		
SOURCE:	Capstone - Home Security System					
PRIMARY ACTOR:	Admin, Advanced user, Basic user					
DESCRIPTION:	The user navigates to a side bar menu in Web Da button . The notification system then toggles between			gle		
PRE-CONDITION:	At least one camera footage is monitored, and the	e notification	method/s must be set for event alerts			
TRIGGER:	User wants to enable or disable system event ale	rt notification	S.			
TYPICAL COURSE OF EVENTS:	Actor Action	System Response Manual Action Automated Action				
	Step 1: User presses the enable toggle button next to the Notification accordion menu in Web Dashboard Page.					
		Step 3: Sys	stem listens to events in footage dete	ection.		
		Step 4: Sys footage det	stem alerts user by email triggered by tections.			
	Step 5 : User responds to notification on Web Dashboard Page.	Step 6: Sys	stem responds.			
ALTERNATE COURSES:	Alt-step 2: The system notification toggles from 6					
	Alt-step 4: System alerts user by SMS triggered by footage detections.					
POST-CONDITION:	System event alerts notifications are toggled from	enabled or o	lisabled or vice versa.			

Figure 13: U5.1 narrative

USE CASE ID:	5.3		USE CASE TYPE		
USE CASE NAME:	Save footage		Business Requirements:		
			System Design:		
PRIORITY:	High		System Analysis:	\checkmark	
SOURCE:	Capstone - Home Security System				
PRIMARY ACTOR:	Admin				
DESCRIPTION:	The admin receives a notification or is viewing previous footage. The Admin then saves the frame of that footage for future viewing.				
PRE-CONDITION:	At least one camera footage is being monitored a	nd notificatio	ns enabled.		
TRIGGER:	A detection is made on camera footage and the reviewing previous footage and wan s to save the fo		e alert the user with footage or the use	er is	
TYPICAL COURSE OF EVENTS:	Actor Action	System Response Manual Action Automated Action			
	Step 1 : User presses the save footage button as the response to the notification for an event alert.	Step 2: Th	e system saves the footage event.		
ALTERNATE COURSES:	Alt-step 1: The user presses the save footage button while in the Footage History Page viewing previous footage throughout the week.				
POST-CONDITION:	System saves a piece of footage.				

Figure 14: U5.3 narrative

4.6 DOMAIN MODEL

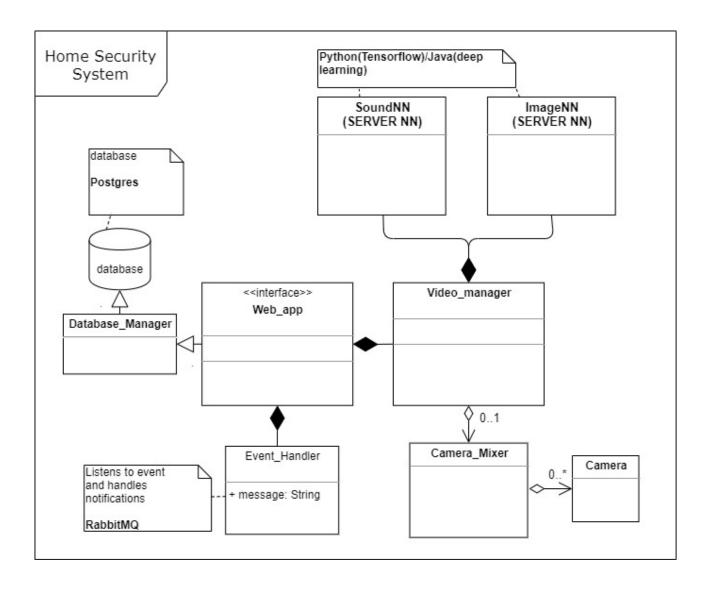


Figure 15: Domain Model

Description Shown in Figure 15, two server neural networks will be implemented, one for the image part of the feed and the other being the audio part of the surveillance camera's video feed. The audio neural network will handle any unusual sound identification, (eg: breaking of a window) while the image neural network will handle facial recognition, unusual behaviour detection and number plate recognition. The Camera Mixer will be the interface that handles the communication between the surveillance camera/s and the video manager. The Video Manager will interface with the Web app to provide it with the live monitoring of the camera's video feed, notifying it when suspicious behaviour is detected, as well as using the dashboard to control which cameras are live and which are deactivated. The user can use the Web app to add and remove "known" persons in the database and to add "unknown" persons, sounds or number plates that have been detected by the neural networks as suspicious. The Event Handler will handle events and notifications that originate from the database or neural network when either a "known" user is added to the system or an alarm has been triggered. The database will contain the list of the "known" users, all the signatures of unusual behaviour and sounds, number plates, together with any history of events that have been triggered in the system