

**INJECTION MOLDING
MACHINE**

METRIC DRAWING PACKAGE

DESIGNED FOR CNC MACHINING

BY DOWNLOADING THIS DOCUMENT YOU
AGREE TO ABIDE BY THE TERMS OF USE,
LISTED ON THE FINAL SHEET

©GREG ESAU 2019

	6	5	4	3	2	1	
	ITEM NO.	PART	QTY.	MATERIAL/VENDOR			
D	1	001-101 - Motor Bracket	1	ALUMINUM 6061-T6			
	2	001-102 - Frame Wall	1	ALUMINUM 6061-T6			
	3	002-101 - Motor Plate	1	ALUMINUM 6061-T6			
	4	002-102 - Fixed Mold Plate	1	ALUMINUM 6061-T6			
	5	002-103 - Moving Mold Plate	1	ALUMINUM 6061-T6			
	6	002-104 - Actuator Plate	1	ALUMINUM 6061-T6			
	7	002-105 - Hopper Bracket	1	ALUMINUM 6061-T6			
	8	002-106 - Extractor Block	1	ALUMINUM 6061-T6			
	9	002-107 - Blank Mold Cavity	1	ALUMINUM 6061-T6			
C	10	003-101 - Screw Support	1	ALUMINUM 6061-T6			
	11	003-102 - Screw	1	STAINLESS STEEL 304L			
	12	003-103 - Extruder Barrel	1	ALUMINUM 6061-T6			
	13	003-104 - Nozzle	1	ALUMINUM 6061-T6			
	14	005-101 - Blank Core	1	ALUMINUM 6061-T6			
	15	005-102 - Blank Ejector Plate	1	STAINLESS STEEL 304L			
	16	SP - Bearing LMK16UU - Phidgets LMN4219_0	4	Phidgets Inc.			
	17	SP - M3x5 SHCS - McMaster-Carr 91292A110	20	McMaster-Carr			
B	18	SP - M3xM3x8 Standoff - McMaster-Carr 98952A106	20	McMaster-Carr			
	19	SP - M4x10 FHCS - McMaster-Carr 91294A190	4	McMaster-Carr			
	20	SP - M4x12 SHCS - McMaster-Carr 91290A148	32	McMaster-Carr			
	21	SP - M4x20 SHCS - McMaster-Carr 91290A168	4	McMaster-Carr			
	22	SP - M4x25 SHCS - McMaster-Carr 91290A176	4	McMaster-Carr			
	23	SP - M4x6 CPSS - McMaster-Carr 91390A112	4	McMaster-Carr			
	24	SP - M6 TNUT - Phidgets TSL4203_0	33	Phidgets Inc.			
	25	SP - M6 Thermocouple - Amazon DLM-B0711DRCVG	1	Amazon			
	26	SP - M6x10 CPSS - McMaster-Carr 91390A128	8	McMaster-Carr			
A	27	SP - M6x14 BHCS - McMaster-Carr 91239A319	35	McMaster-Carr			
	28	SP - M6x15 FHCS - McMaster-Carr 92125A111	6	McMaster-Carr			
	29	SP - M6x40 DWL - McMaster-Carr 91585A692	4	McMaster-Carr			
	30	SP - M6x8 SPSS - McMaster-Carr 94085A127	4	McMaster-Carr	©GREG ESAU 2019		
	6	5	4	3	2	1	

6

5

4

3

2

1

D

C

B

A

ITEM NO.	PART	QTY.	MATERIAL/VENDOR																				
31	SP - N23 Actuator - Haydon-Kerk 57M43-3_25-910	1	Haydon-Kerk																				
32	SP - NEMA34 Motor - Phidgets 3335_0	1	Phidgets Inc.																				
33	SP - Phidgets HUB0000_0	1	Phidgets Inc.																				
34	SP - Phidgets REL1100_0	1	Phidgets Inc.																				
35	SP - Phidgets STC1000_0	2	Phidgets Inc.																				
36	SP - Phidgets TMP1101_0	1	Phidgets Inc.																				
37	SP - 16TxHTD5 Pulley - Phidgets TRM4125_0	1	Phidgets Inc.																				
38	SP - 16x295mm Rail - Phidgets LMN4002_0	4	Phidgets Inc.																				
39	SP - 18x25x6 Wave Spring - McMaster-Carr 1561T430	1	McMaster-Carr																				
40	SP - 24V PSU - Phidgets PSU4016_0	1	Phidgets Inc.																				
41	SP - 3030 Extrusion Bracket - McMaster-Carr 5537T659	4	McMaster-Carr																				
42	SP - 3030x200mm Extrusion - Phidgets TSL4002_0	2	McMaster-Carr																				
43	SP - 3030x225mm Extrusion - Phidgets TSL4002_0	2	McMaster-Carr																				
44	SP - 3030x265mm Extrusion - Phidgets TSL4002_0	1	McMaster-Carr																				
45	SP - 3030x295mm Extrusion - Phidgets TSL4002_0	1	McMaster-Carr																				
46	SP - 34TxHTD5 Pulley - Phidgets TRM4122_0	1	Phidgets Inc.																				
47	SP - 3_4 Bearing - McMaster-Carr 5709K770	2	McMaster-Carr																				
48	SP - 3_4-16 NUTT - McMaster Carr 91847A555	1	McMaster-Carr																				
49	SP - 6x20 Heater - Amazon 258RK-3-U5	3	Amazon																				
<div>NOTE:</div> <div>-VENDOR PART NUMBERS ARE INCLUDED AT THE END OF THE PART NAME</div> <div>-THIS PACKAGE DEALS MOSTLY WITH MECHANICAL COMPONENTS. I MAY PUBLISH WIRING DIAGRAMS SEPARATELY, HOWEVER I WILL NOT SPEC SPECIFIC WIRING COMPONENTS.</div> <table><tr><th>ITEM</th><th>PART NUMBER</th><th>VENDOR</th><th>QUANTITY</th></tr><tr><td>VINT CABLE</td><td>3004_0</td><td>PHIDGETS INC</td><td>4</td></tr><tr><td>ASSORTED WIRE</td><td>-</td><td>-</td><td>-</td></tr><tr><td>POWER ENTRY CONNECTOR*</td><td>-</td><td>-</td><td>-</td></tr><tr><td>POWER CABLE*</td><td>-</td><td>-</td><td>-</td></tr></table> <div>* I PURPOSELY OMITTED POWER COMPONENTS DUE TO VARYING REGIONAL STANDARDS AND LIABILITY</div> <div>©GREG ESAU 2019</div>				ITEM	PART NUMBER	VENDOR	QUANTITY	VINT CABLE	3004_0	PHIDGETS INC	4	ASSORTED WIRE	-	-	-	POWER ENTRY CONNECTOR*	-	-	-	POWER CABLE*	-	-	-
ITEM	PART NUMBER	VENDOR	QUANTITY																				
VINT CABLE	3004_0	PHIDGETS INC	4																				
ASSORTED WIRE	-	-	-																				
POWER ENTRY CONNECTOR*	-	-	-																				
POWER CABLE*	-	-	-																				

6


5

4

3

2

1


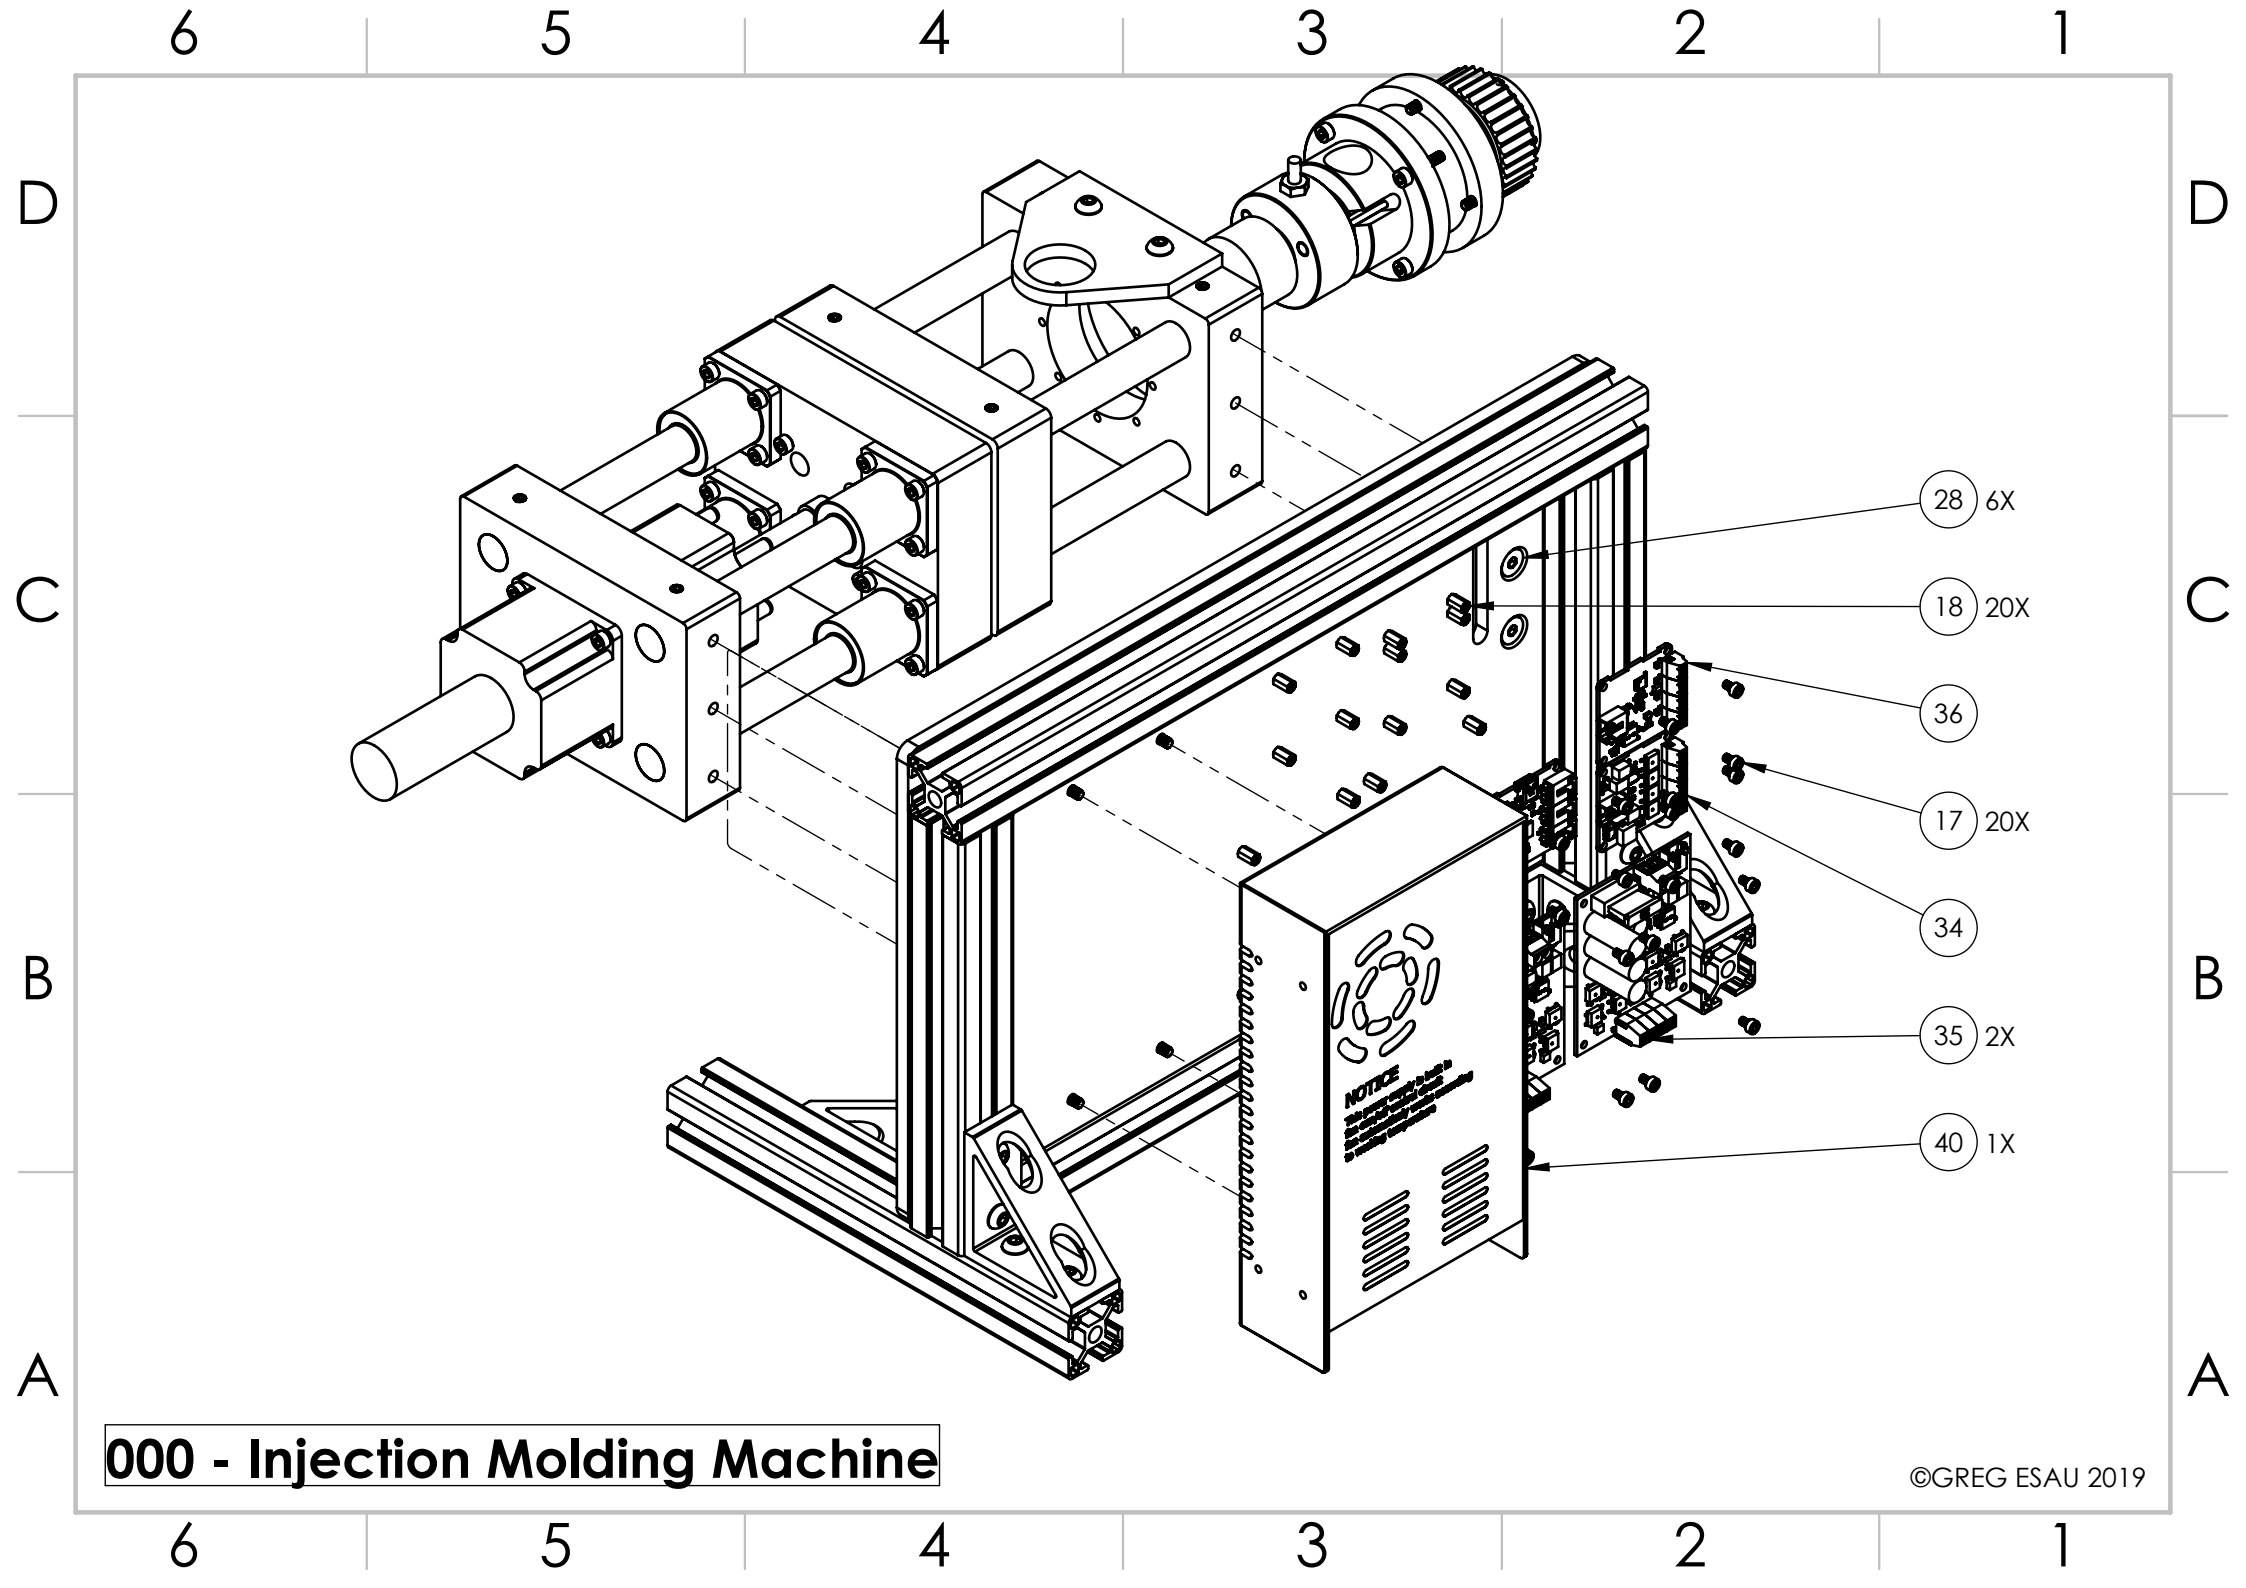


000 - Injection Molding Machine

6 5 4 3 2 1


D
C
B
A

D
C
B
A

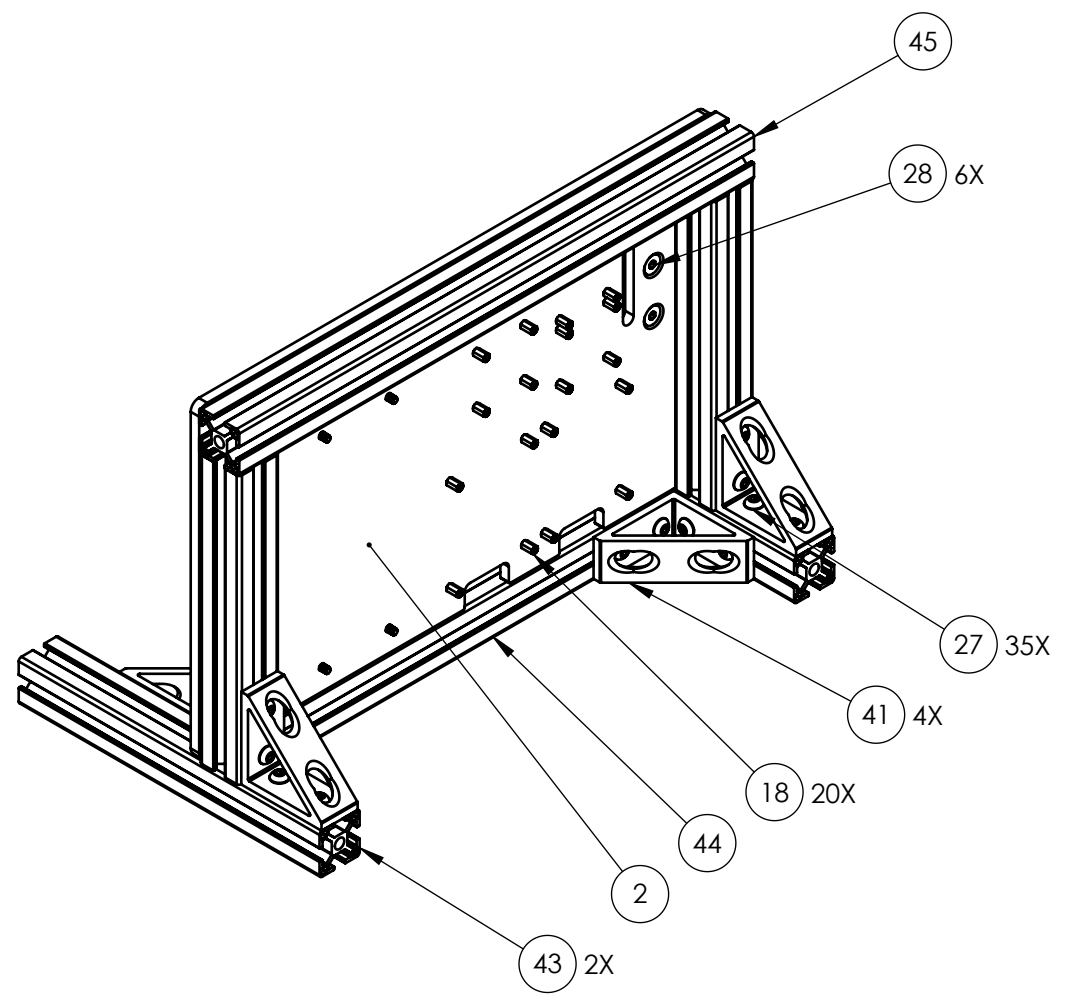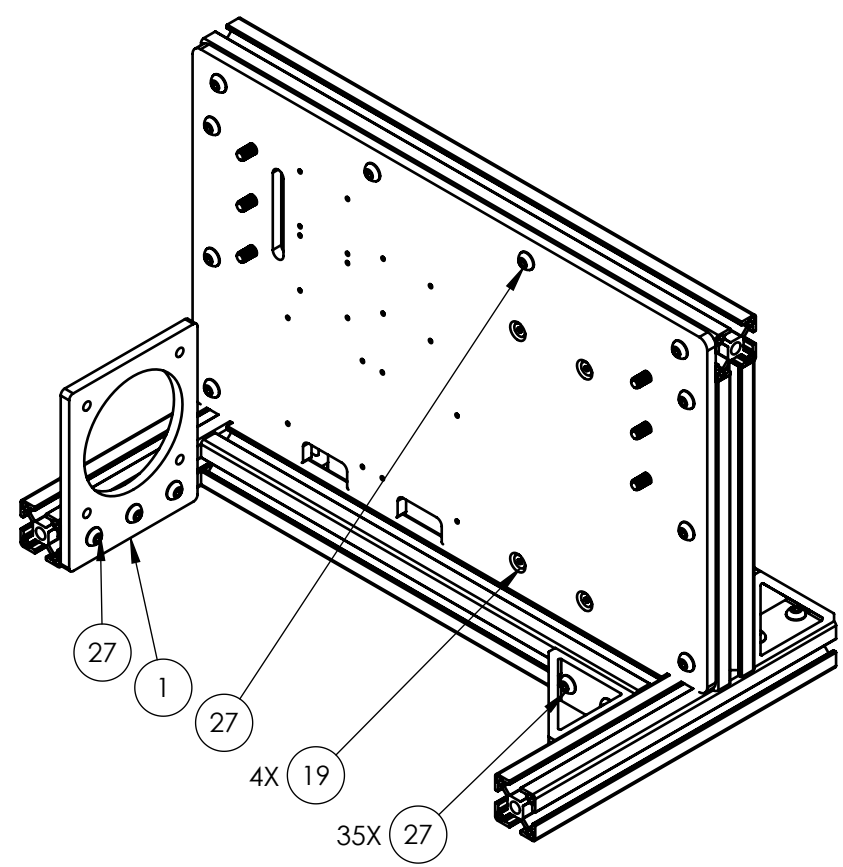


001 - Machine Frame


6 5 4 3 2 1

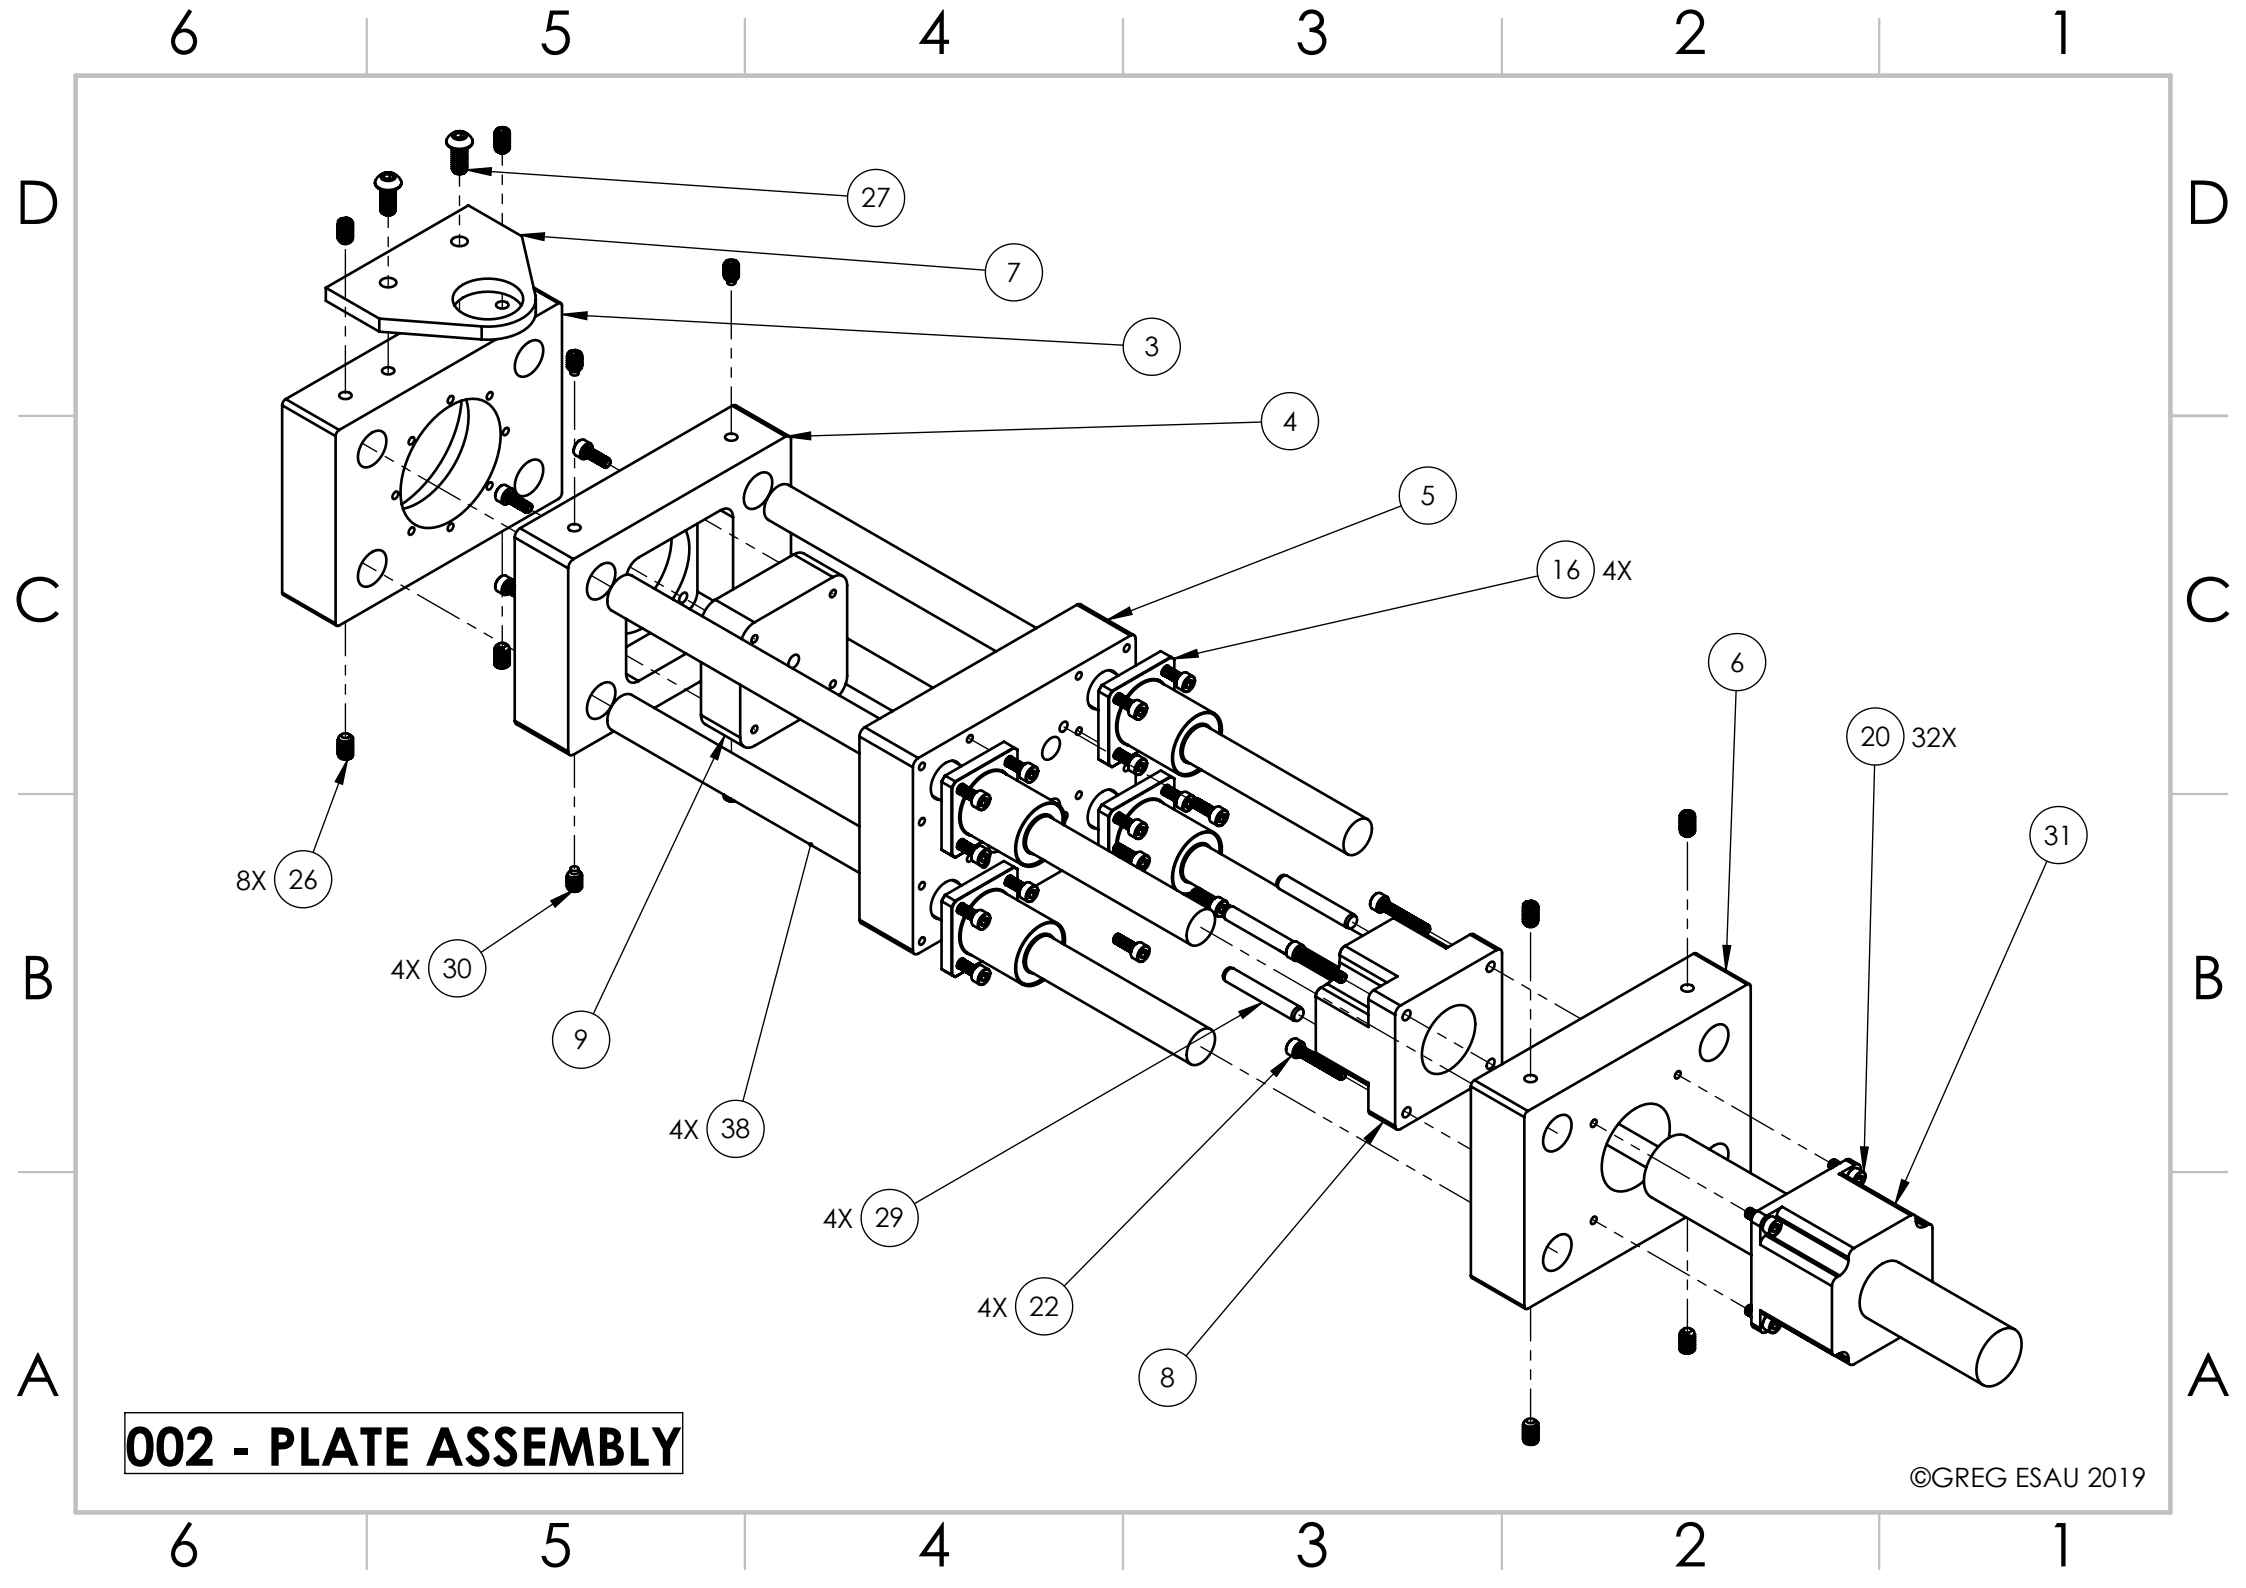



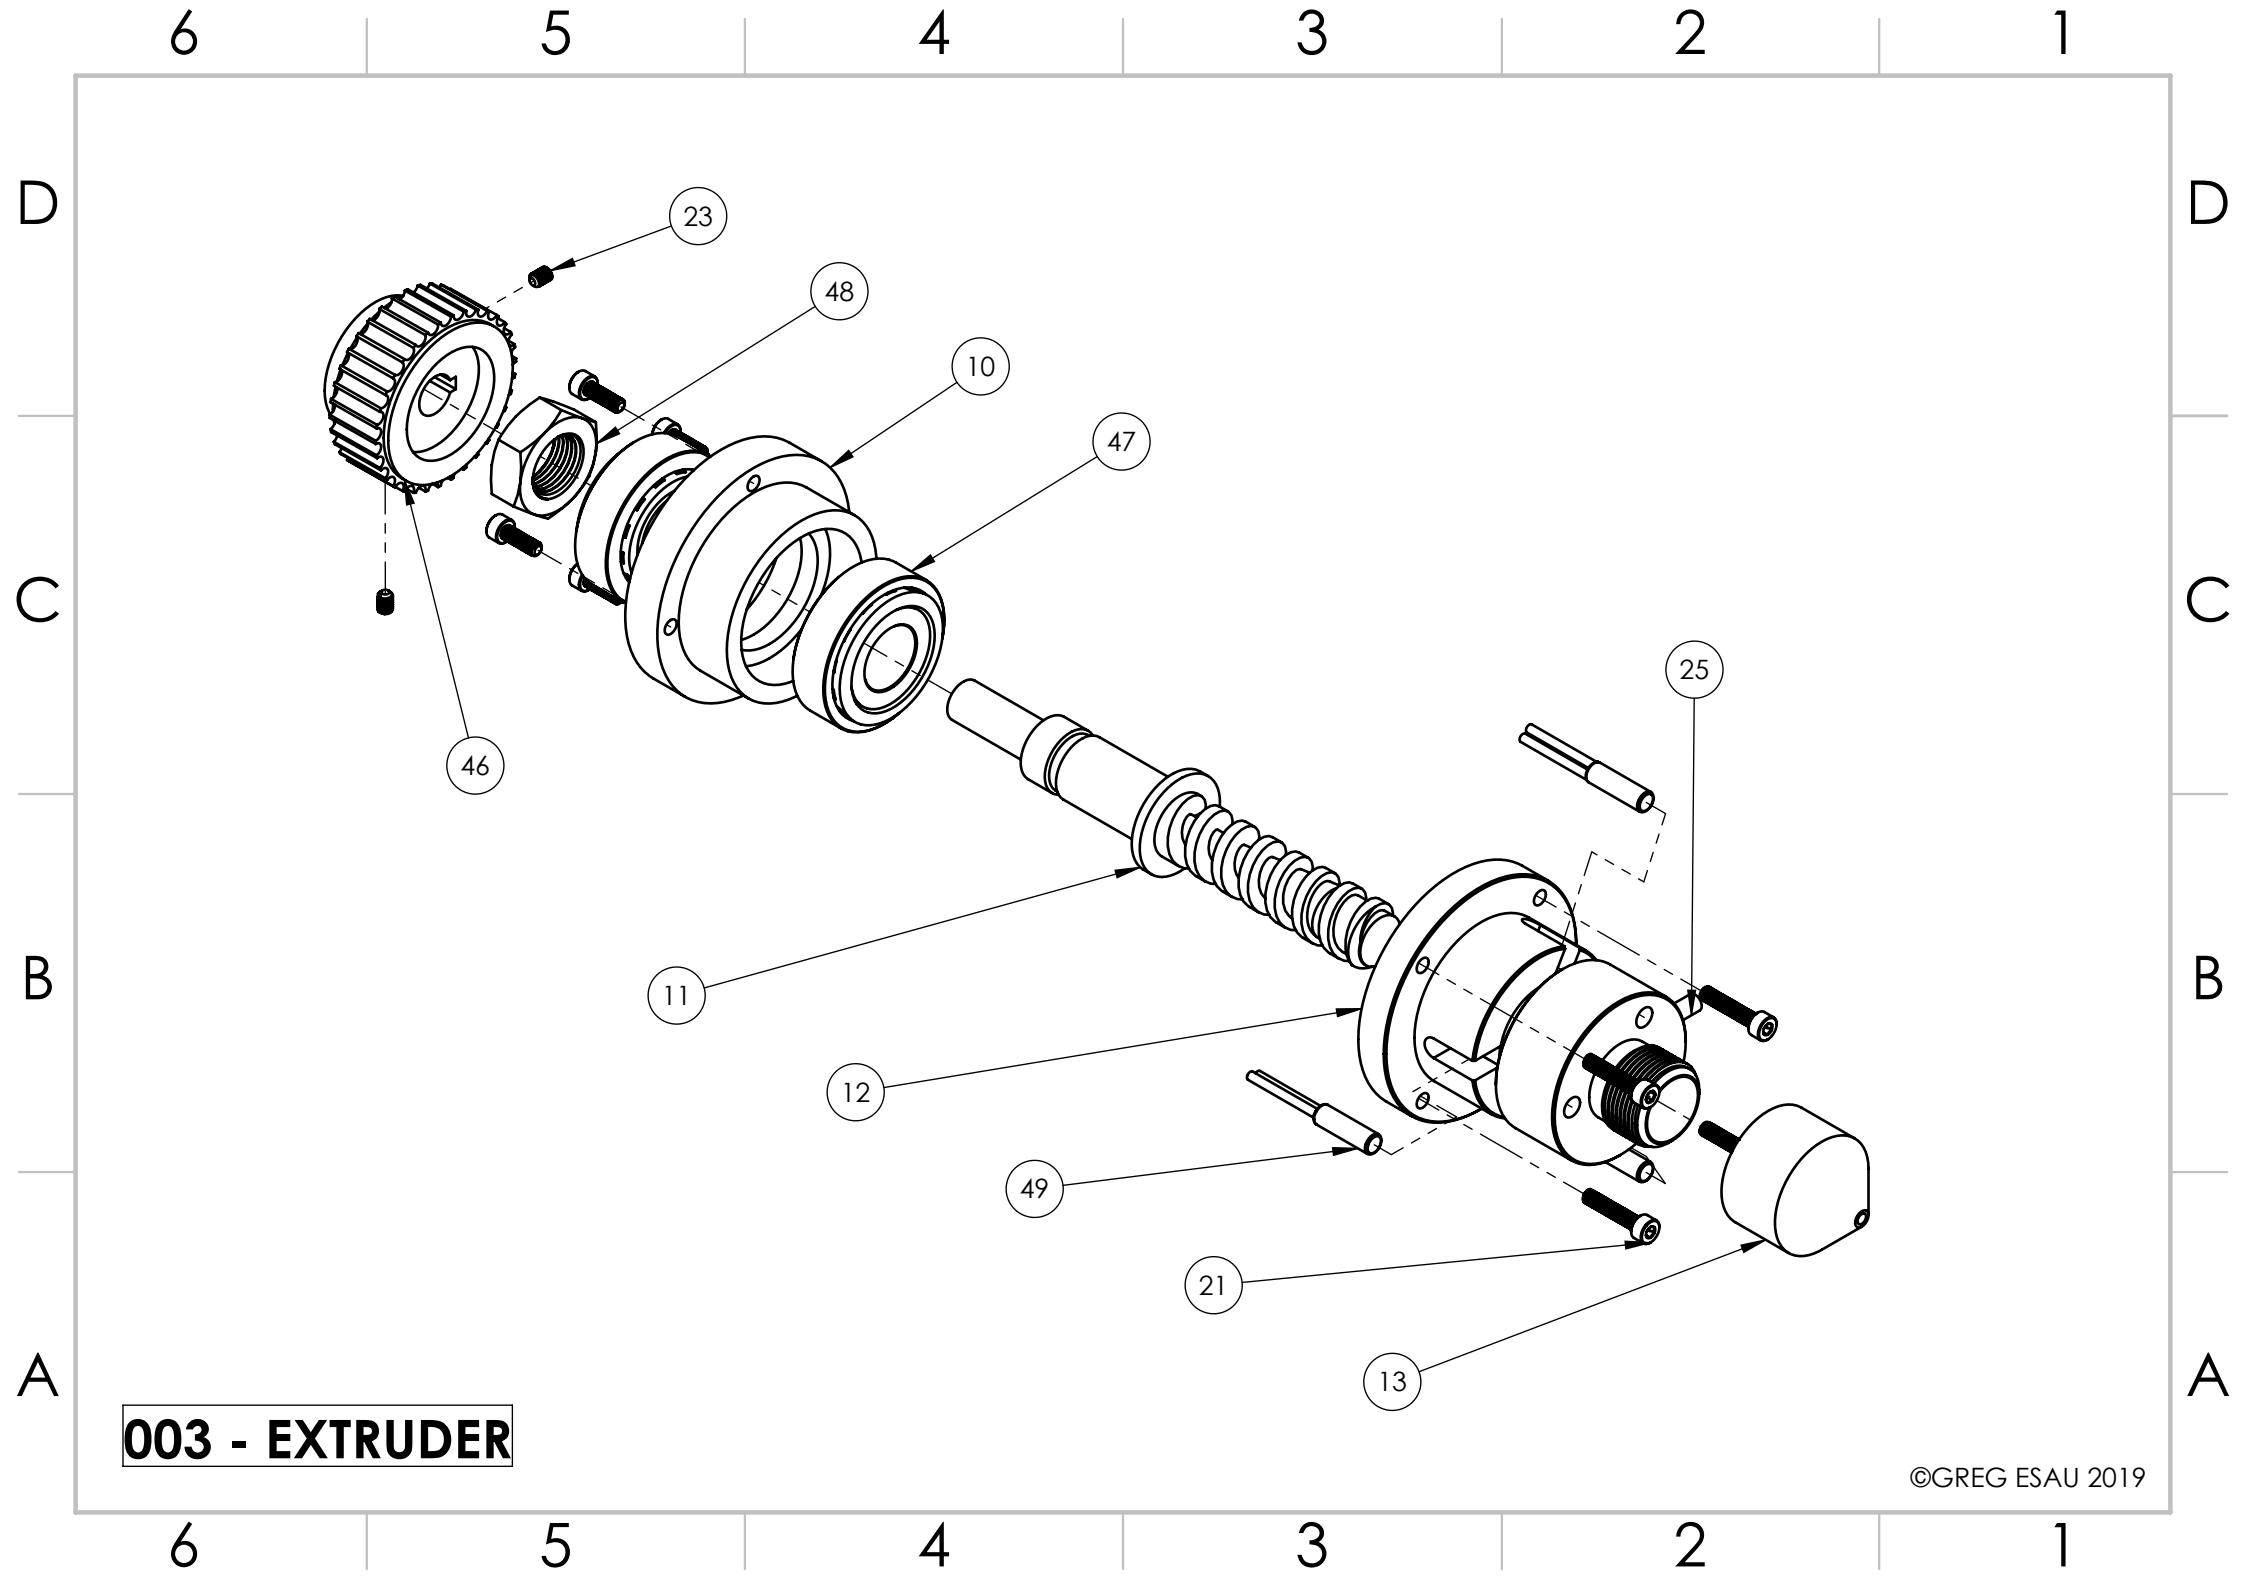

003 - EXTRUDER

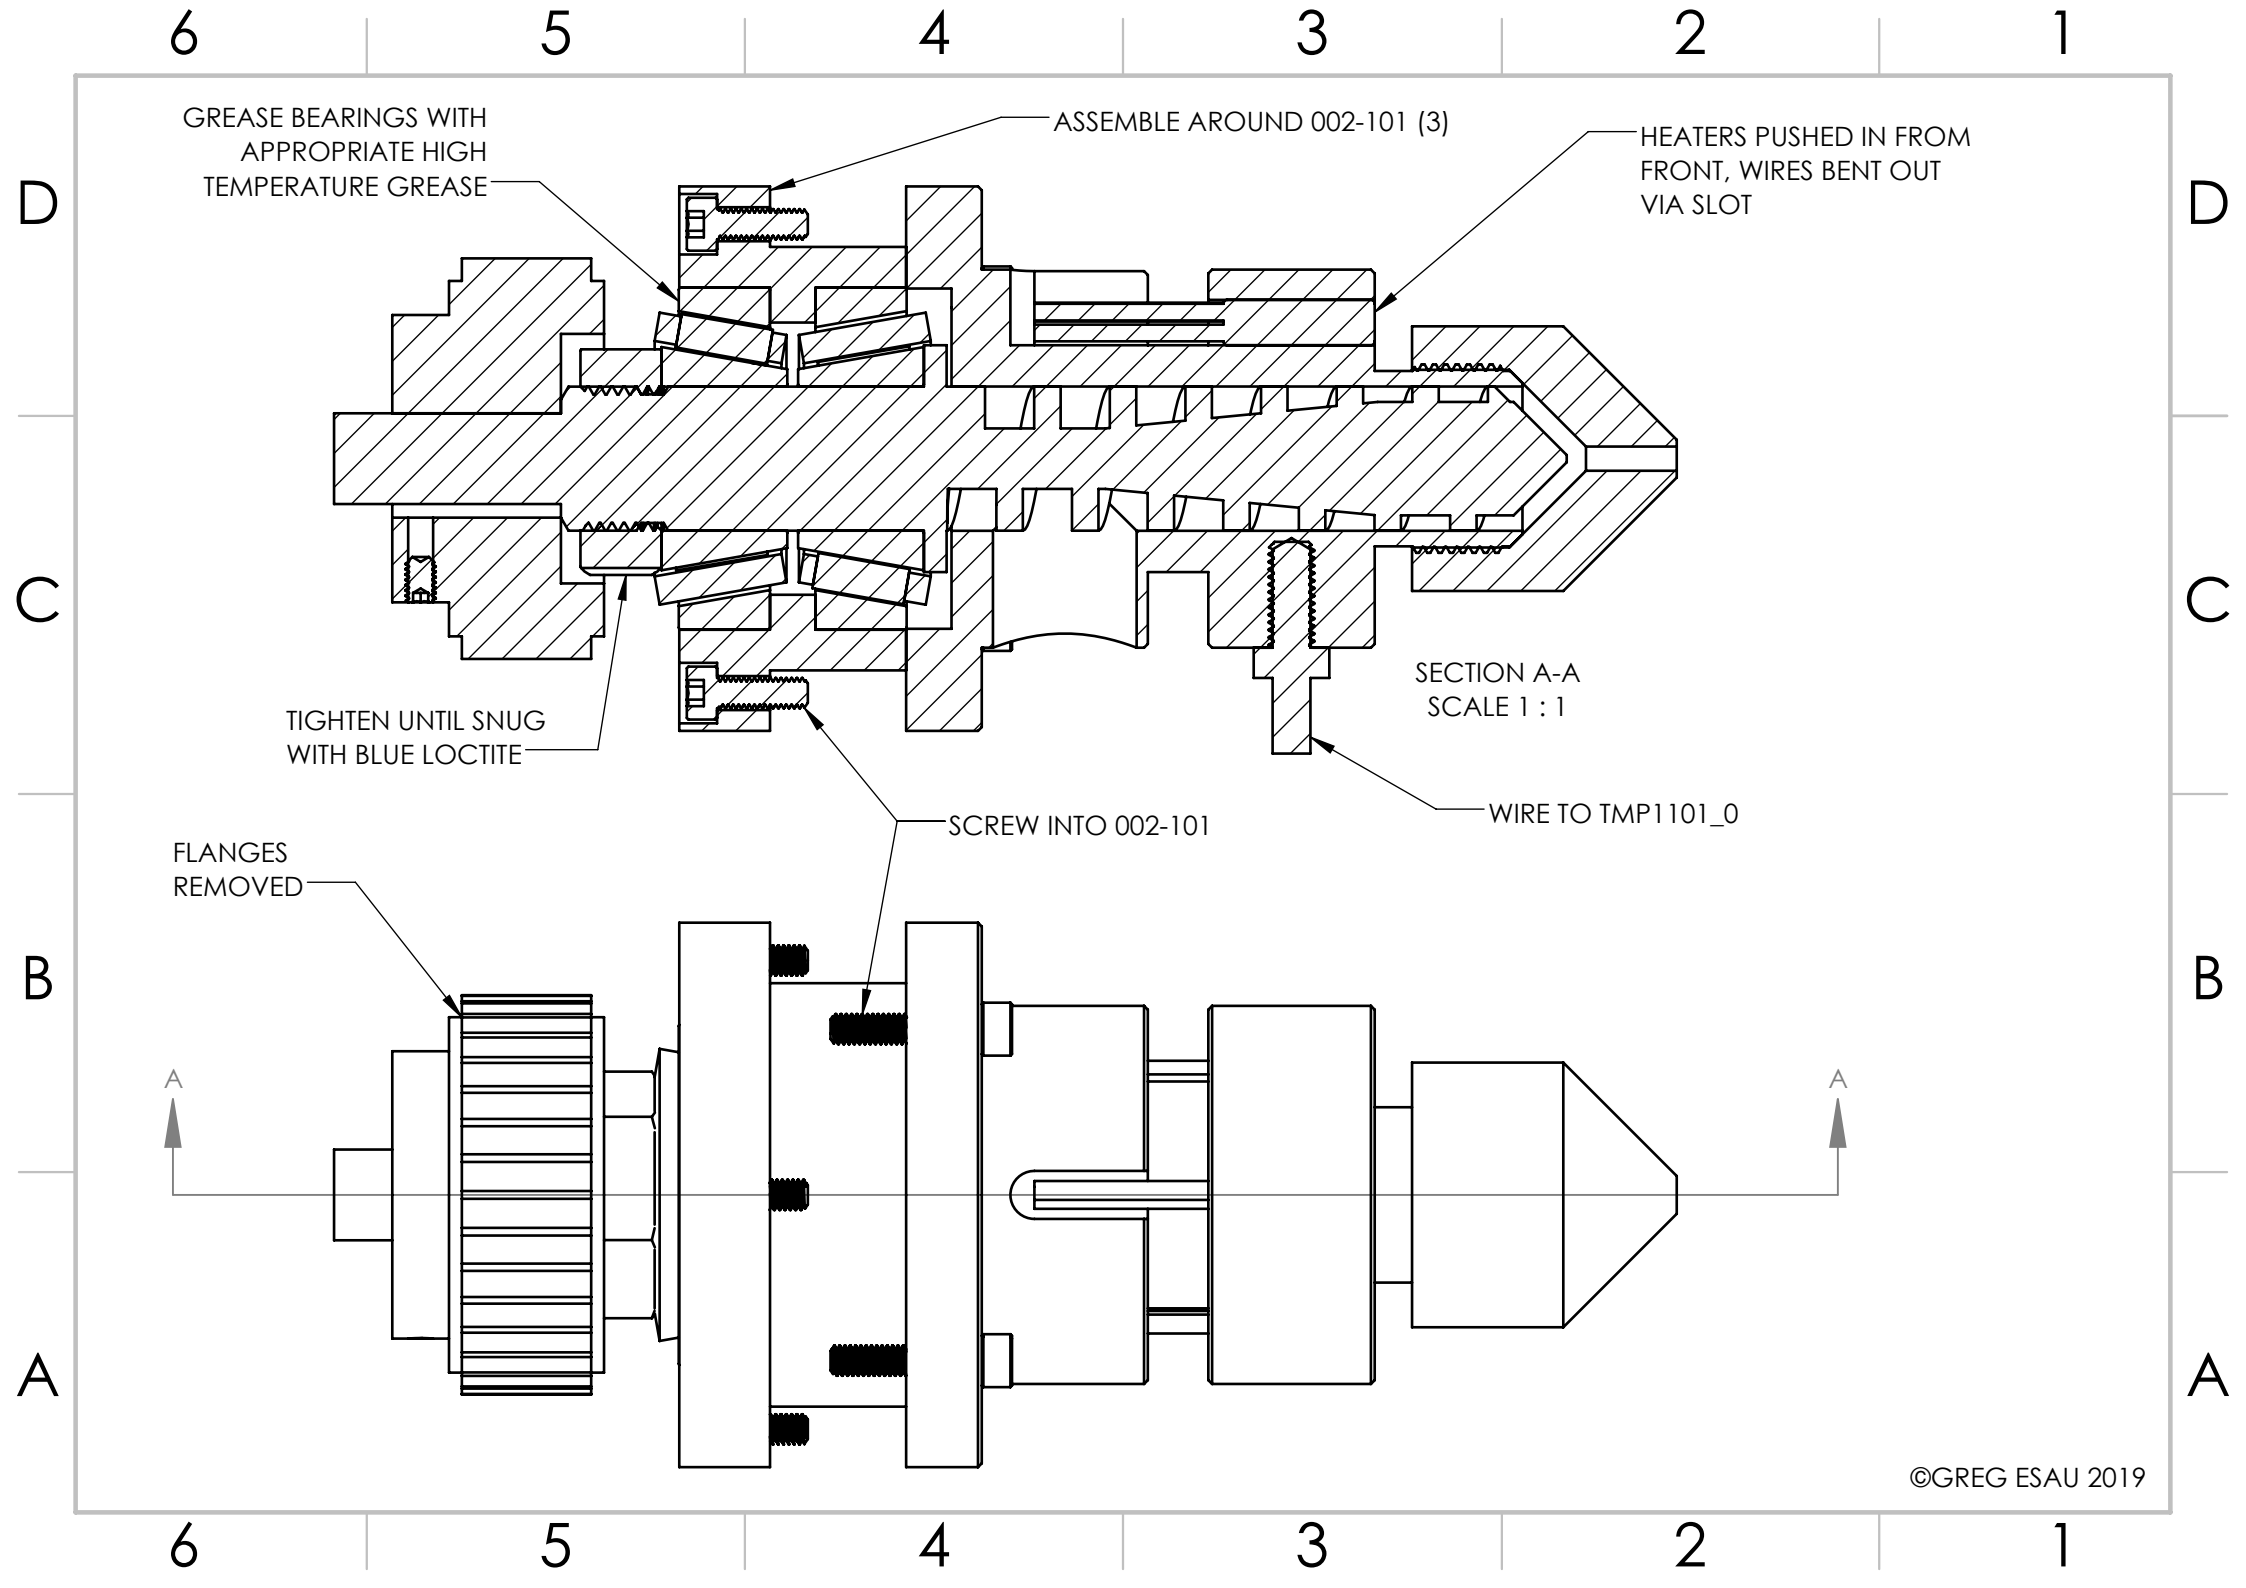

6 5 4 3 2 1

D

D

C


C

B

B

A

A

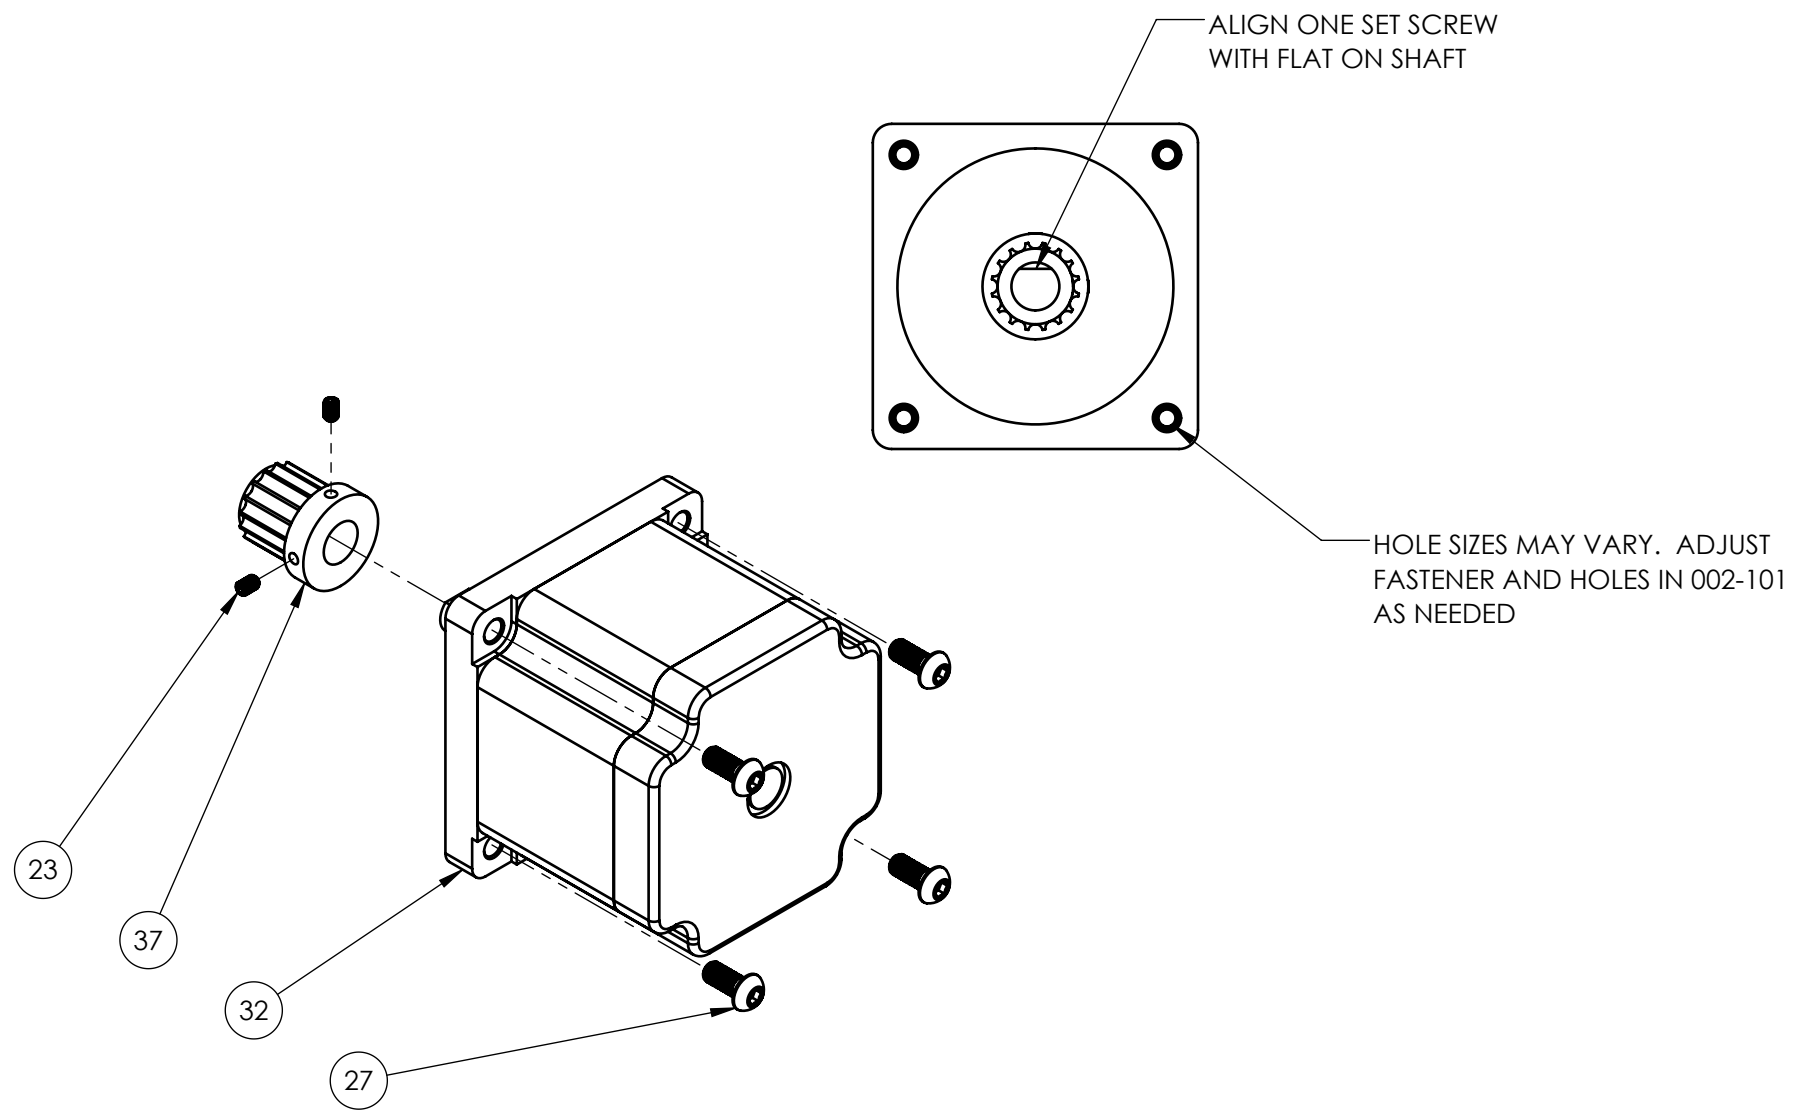



004 - MOTOR SUBASSEMBLY

6 5 4 3 2 1

6 5 4 3 2 1

D
C
B
A


D
C
B
A

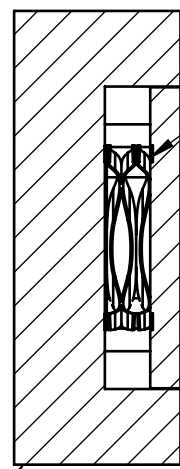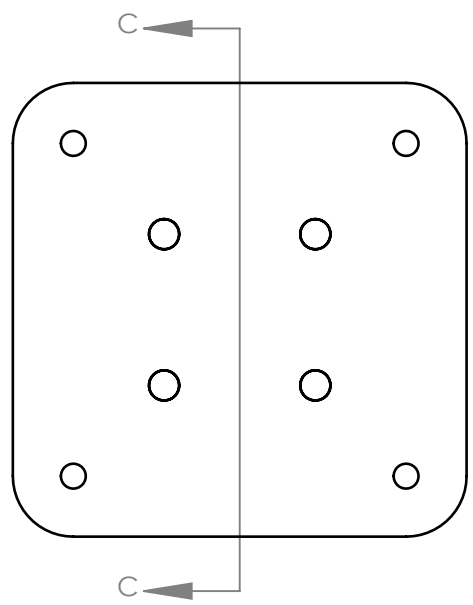

SECTION C-C

SPRING AND PIN PLACEMENT WILL VARY WITH MOLD DESIGN AND APPLICATION. THE SPRING SHOWN HERE IS MERELY AN EXAMPLE OF APPLICABLE HARDWARE

EJECTOR PINS ARE ACTUATED BY CONTACT PINS INSERTED IN 002-106.

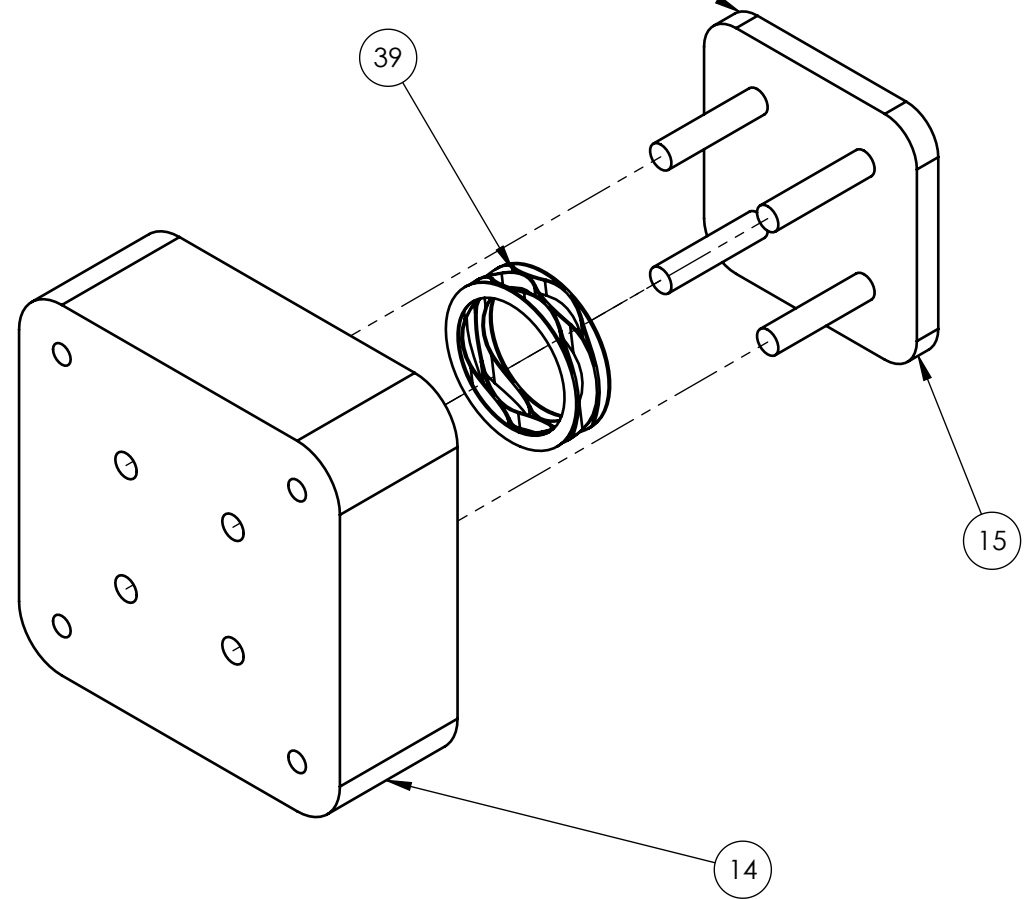

ASSEMBLY IS HELD TOGETHER WHEN INSERTED INTO THE POCKET IN 002-103

NOTES:

- THE DRAWINGS OF THE INDIVIDUAL PARTS SPECIFY AN H7/g7 FIT
- THIS DOES NOT ACCOUNT FOR POSITIONAL TOLERANCES WHICH ARE DICTATED BY YOUR MOLD DESIGN

005 - BLANK MOLD CORE

6 5 4 3 2 1

D

C

B


A

D


C

B

A



ISO VIEW NTS

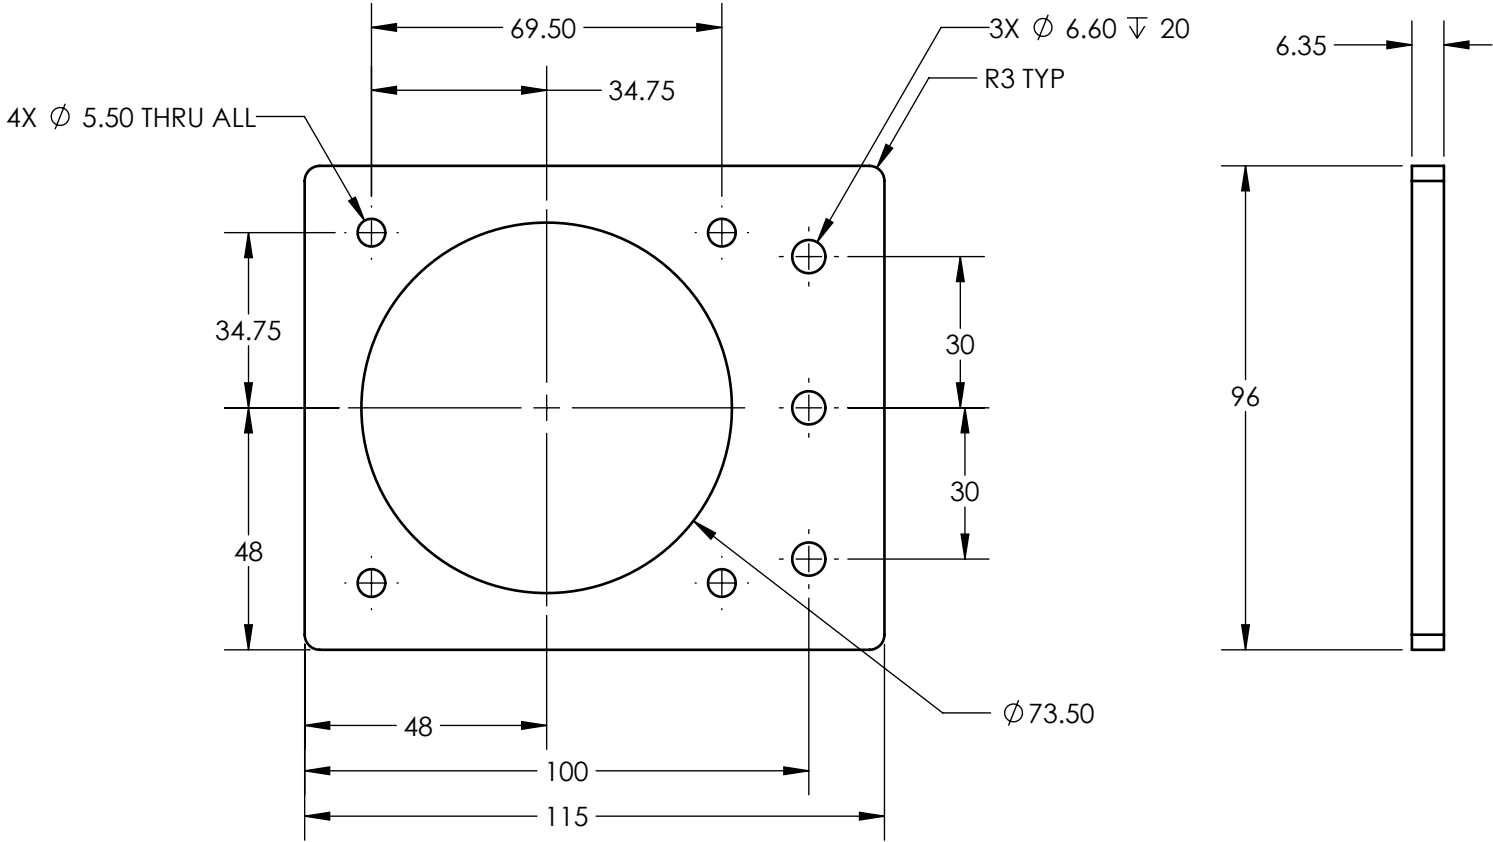

©GREG ESAU 2019

LAST EDITED: 2019-06-25

TITLE: **001-101 - Motor Bracket**

MATERIAL:

ALUMINUM 6061-T6

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH: 0.8um
TOLERANCES:
LINEAR: 0.1
ANGULAR: 0.1

DEBURR AND
BREAK SHARP
EDGES

SCALE:1:1
A4

SHEET 12 OF 28

6


5

4


3

2

1


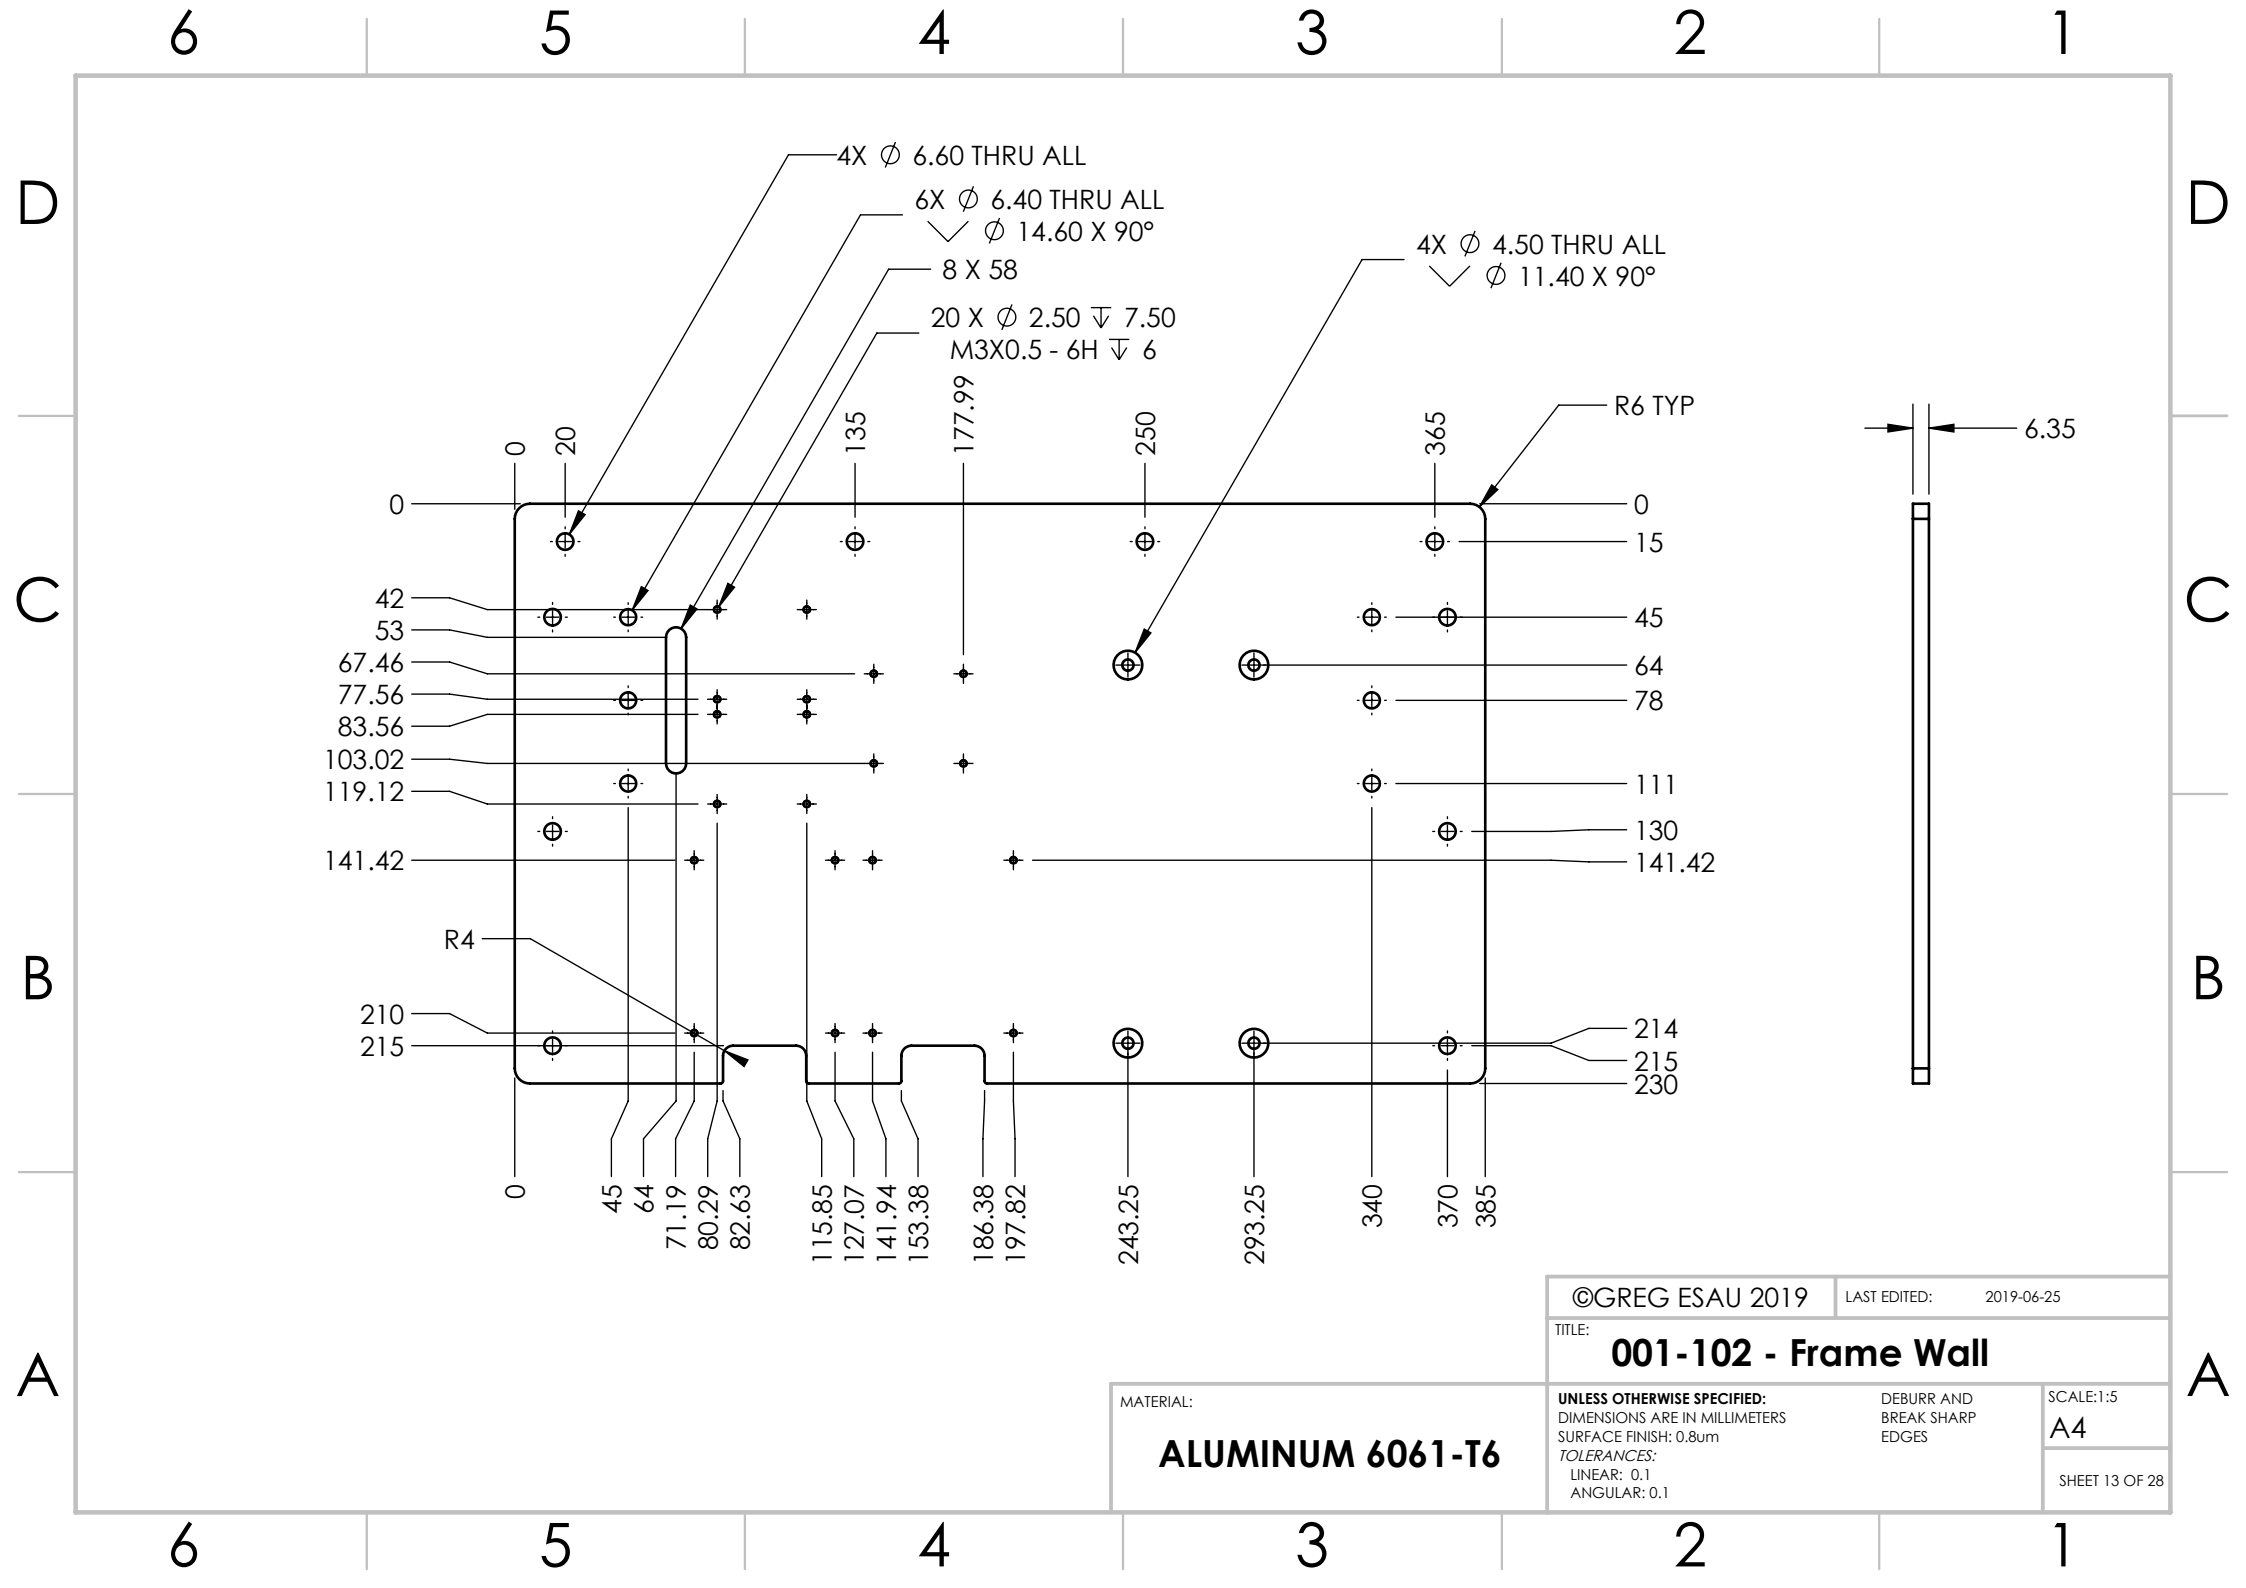


©GREG ESAU 2019		LAST EDITED: 2019-06-25	
TITLE: 001-102 - Frame Wall			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: 0.8um TOLERANCES: LINEAR: 0.1 ANGULAR: 0.1		DEBURR AND BREAK SHARP EDGES	
		SCALE:1:5 A4	
		SHEET 13 OF 28	

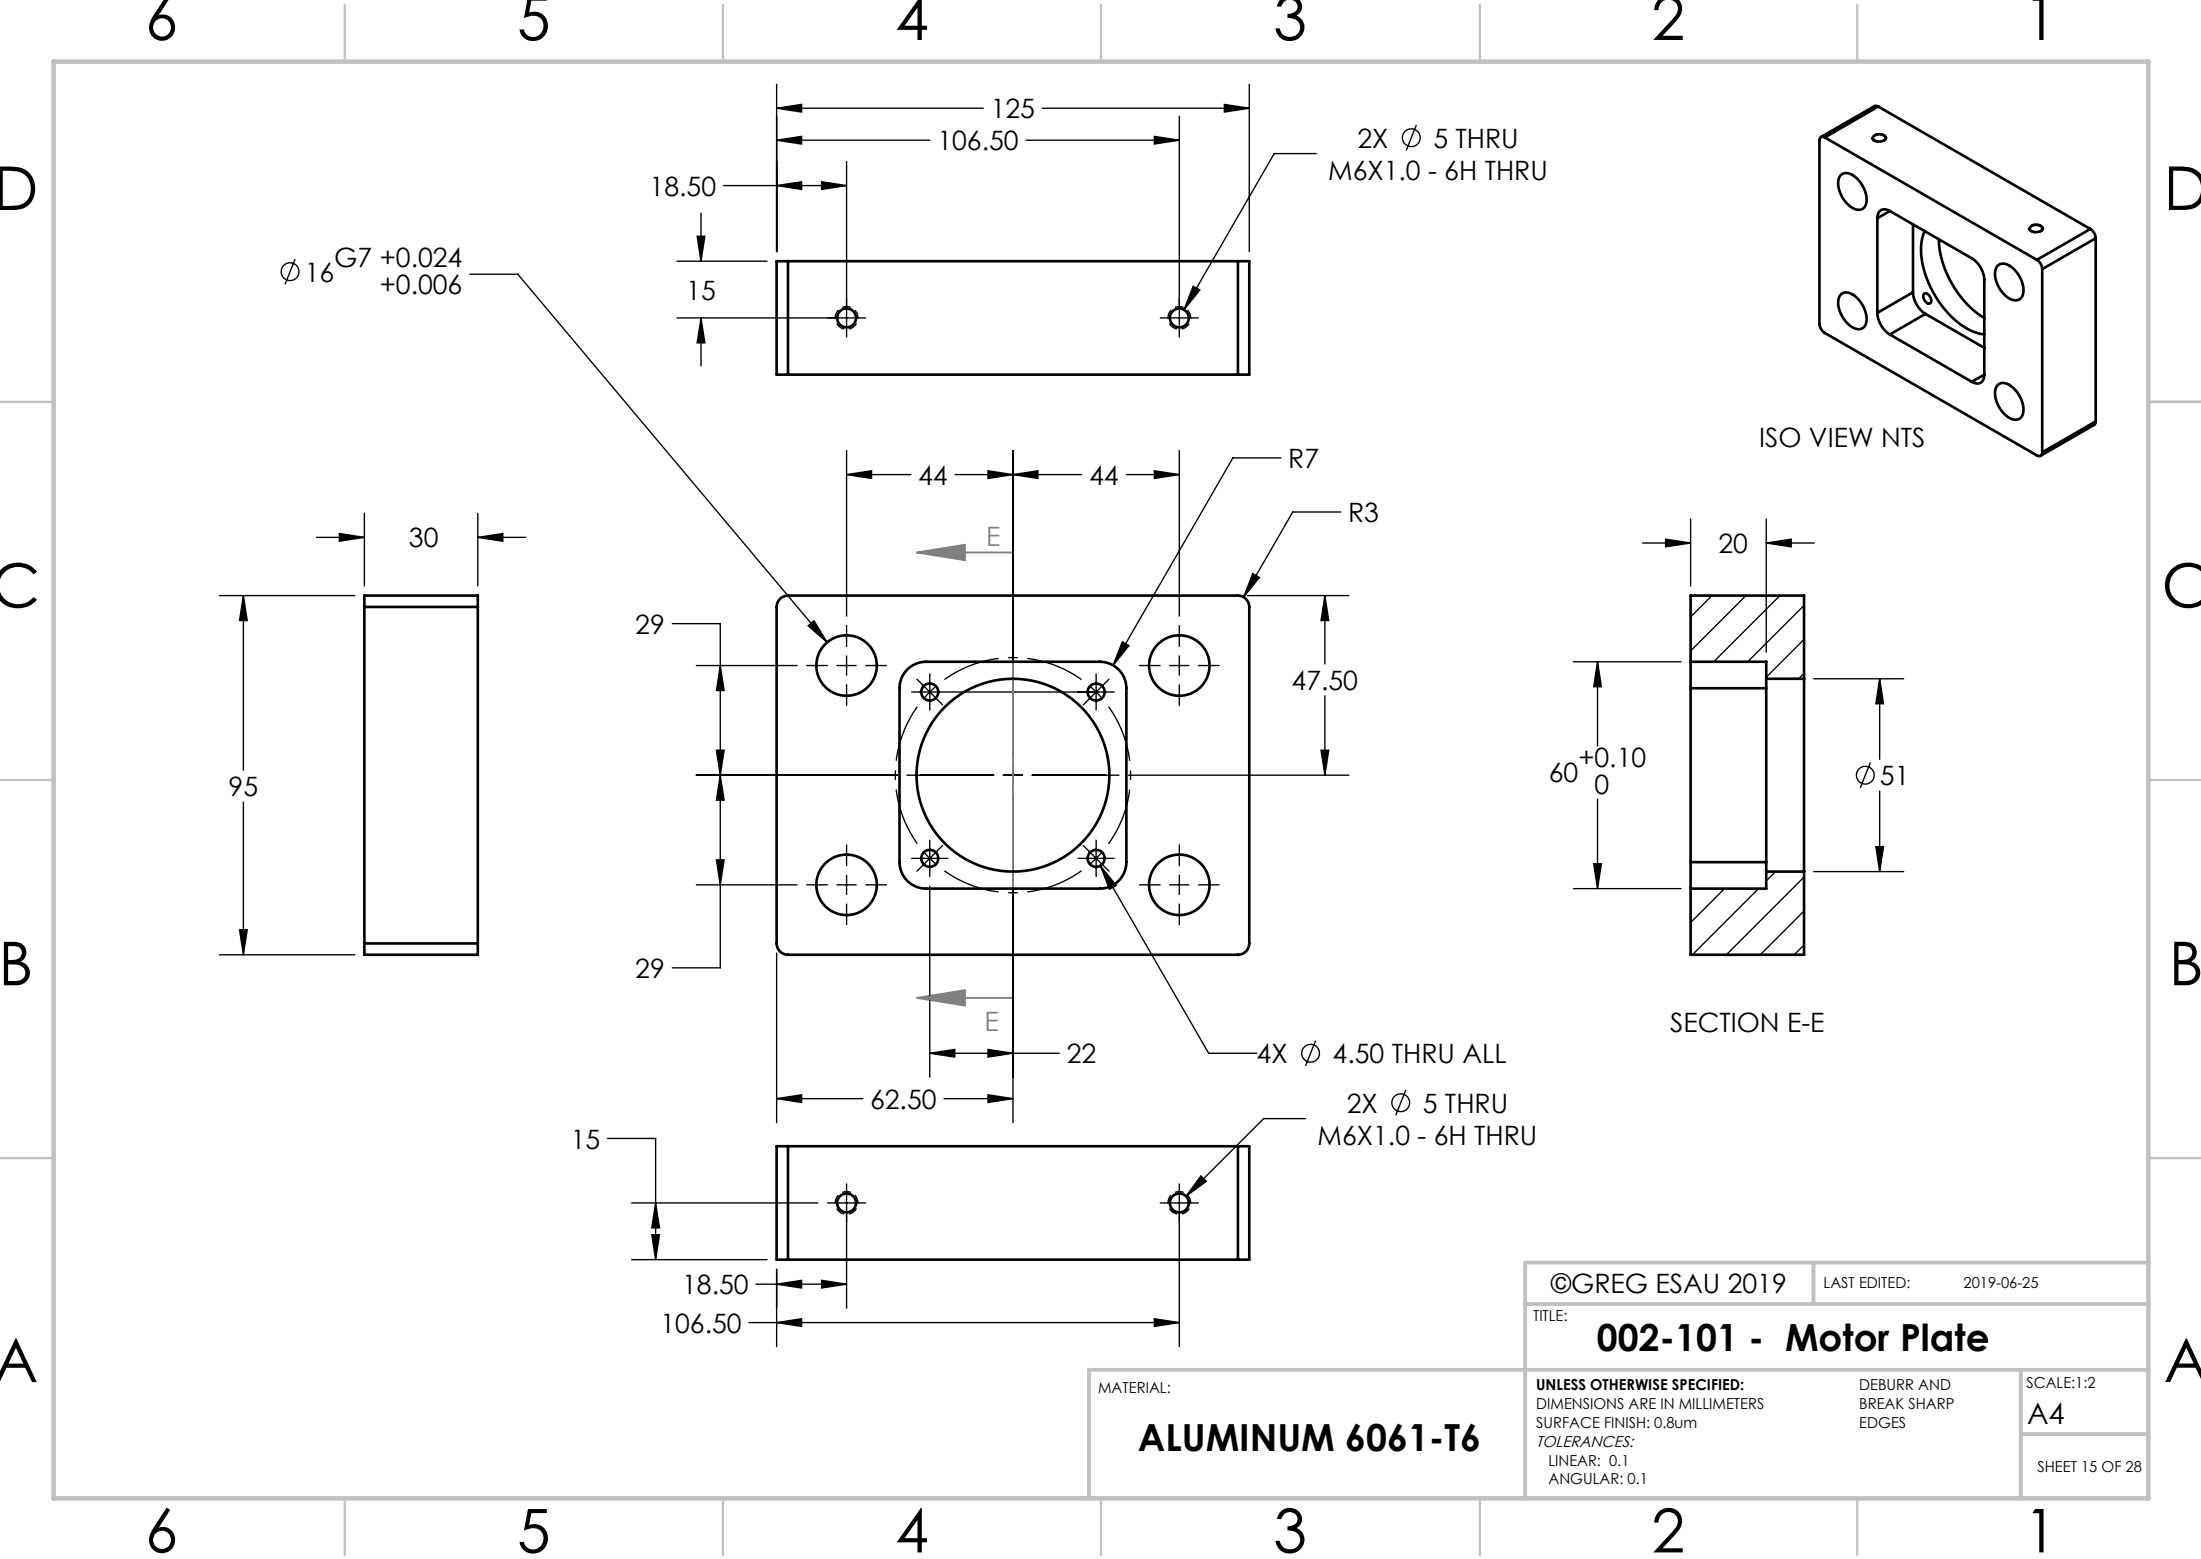


©GREG ESAU 2019	LAST EDITED: 2019-06-25
TITLE: 002-101 - Motor Plate	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: 0.8um TOLERANCES: LINEAR: 0.1 ANGULAR: 0.1	DEBURR AND BREAK SHARP EDGES
	SCALE:1:2 A4 SHEET 15 OF 28


MATERIAL:
ALUMINUM 6061-T6

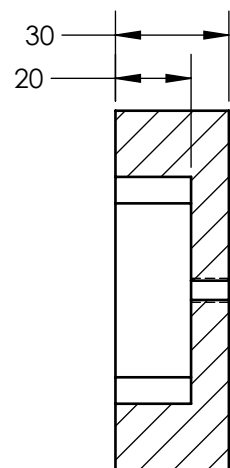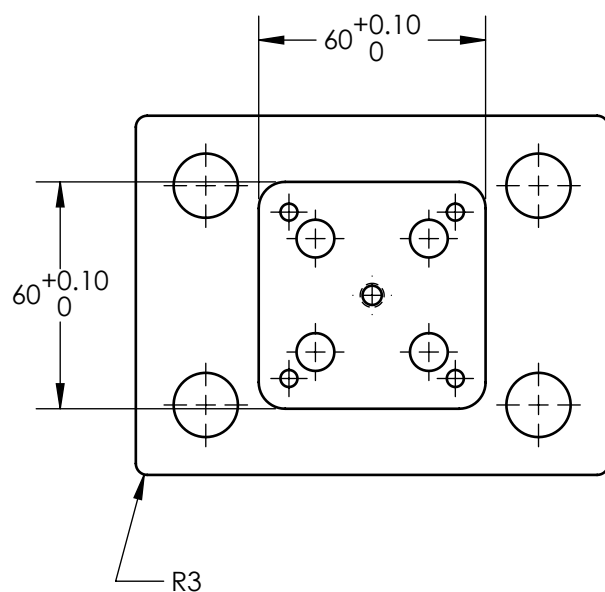


SECTION F-F


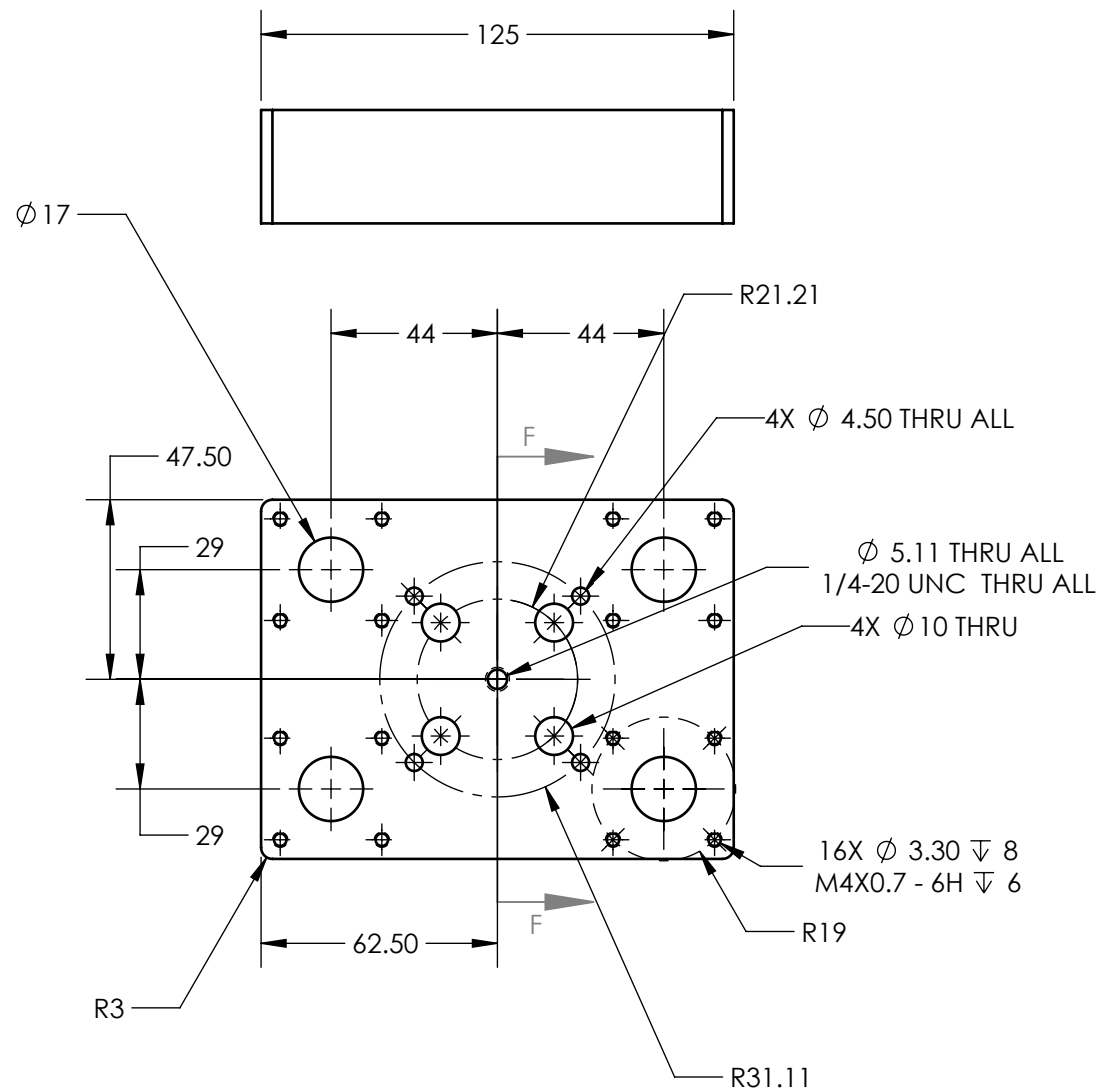


©GREG ESAU 2019		LAST EDITED: 2019-06-25	
TITLE: 002-103 - Moving Mold Plate			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: 0.8um <i>TOLERANCES:</i> LINEAR: 0.1 ANGULAR: 0.1		DEBURR AND BREAK SHARP EDGES	
		SCALE: 1:2 A4	
		SHEET 16 OF 2	

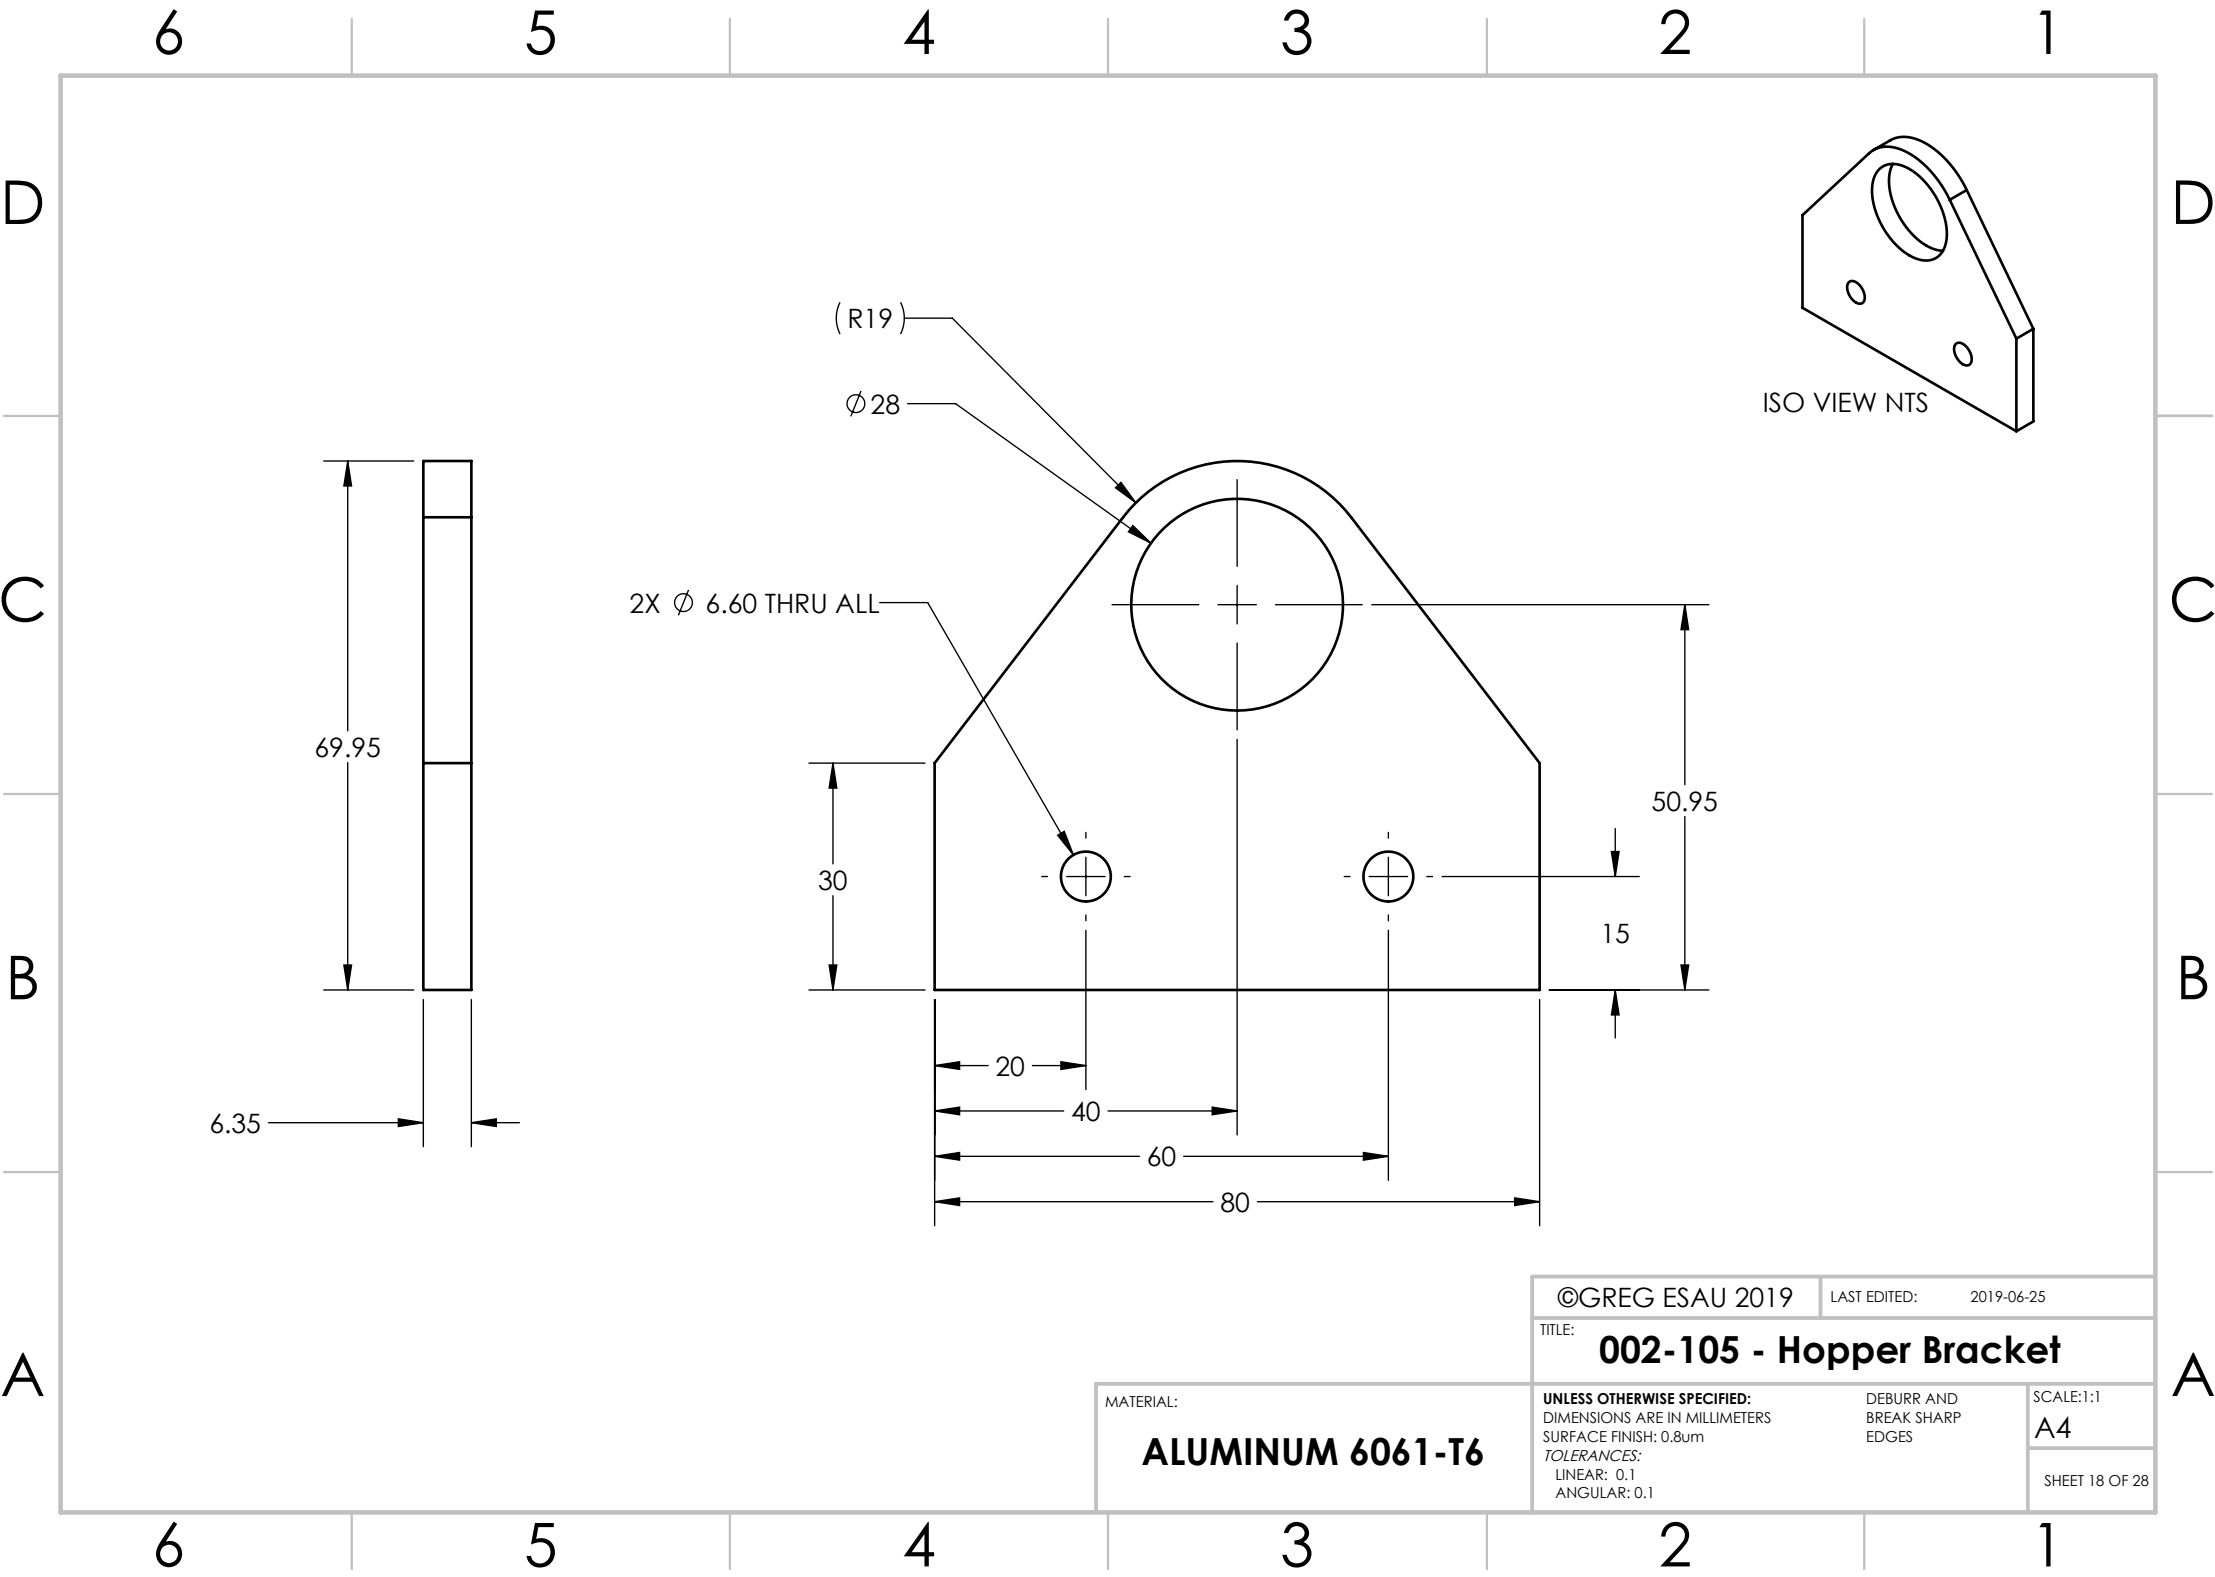



ISO VIEW NTS

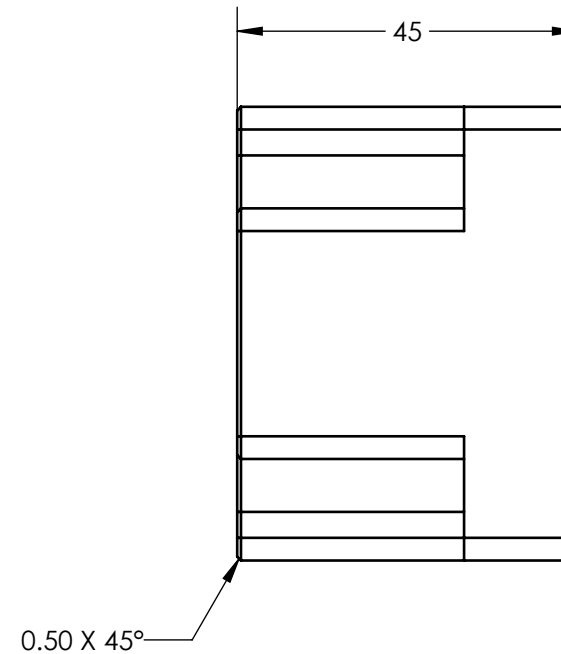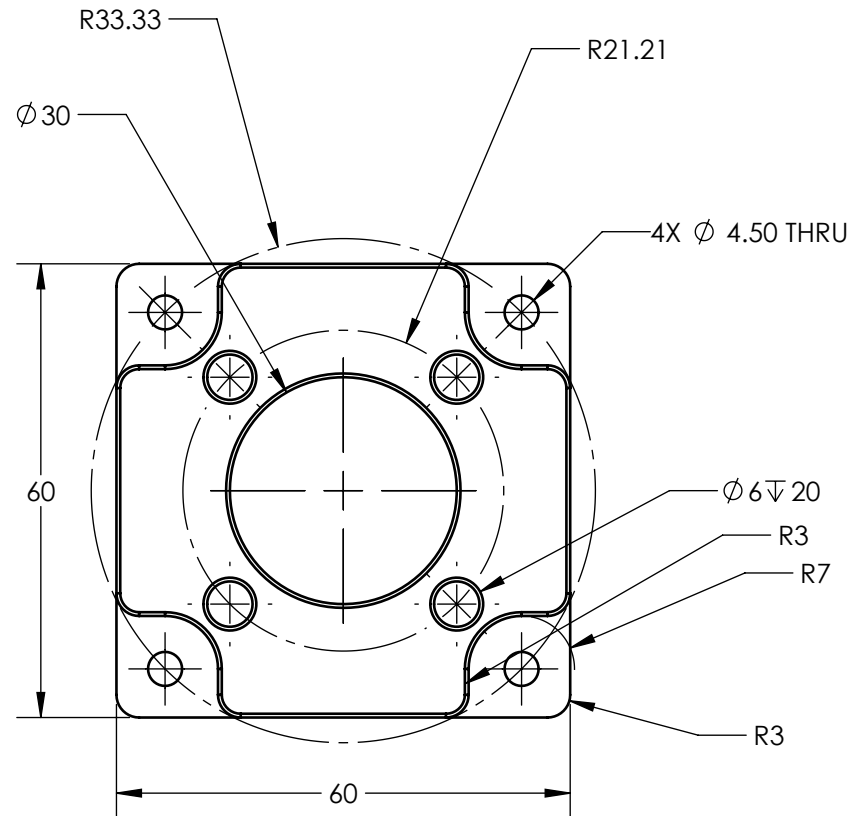

NOTES:

- DOWEL HOLE DEPTHS WITH 20MM DOWELS ACCOMMODATE 12MM EXTRACTOR PIN STROKE
- CHANGING DOWELS CAN CHANGE THIS

©GREG ESAU 2019

LAST EDITED: 2019-06-25

TITLE:

002-106 - Extractor Block

MATERIAL:

ALUMINUM 6061-T6

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH: 0.8um
TOLERANCES:
LINEAR: 0.1
ANGULAR: 0.1

DEBURR AND
BREAK SHARP
EDGES

SCALE:1:1
A4

SHEET 19 OF 28

D

D

C


C

B



B

A

A

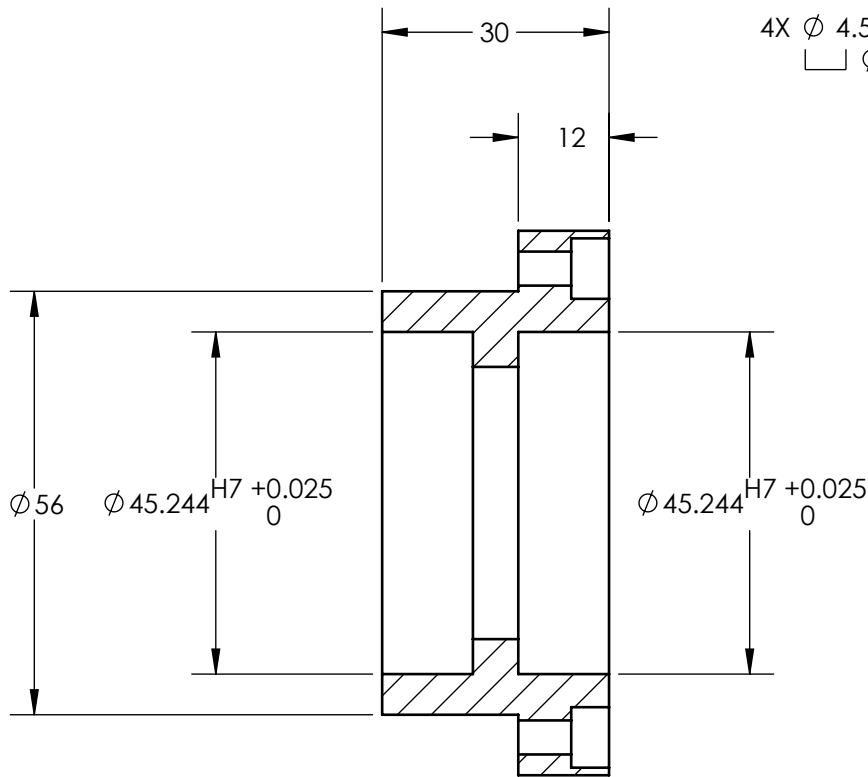

4X $\phi 4.50$ THRU ALL
 $\square \phi 8 \nabla 5$

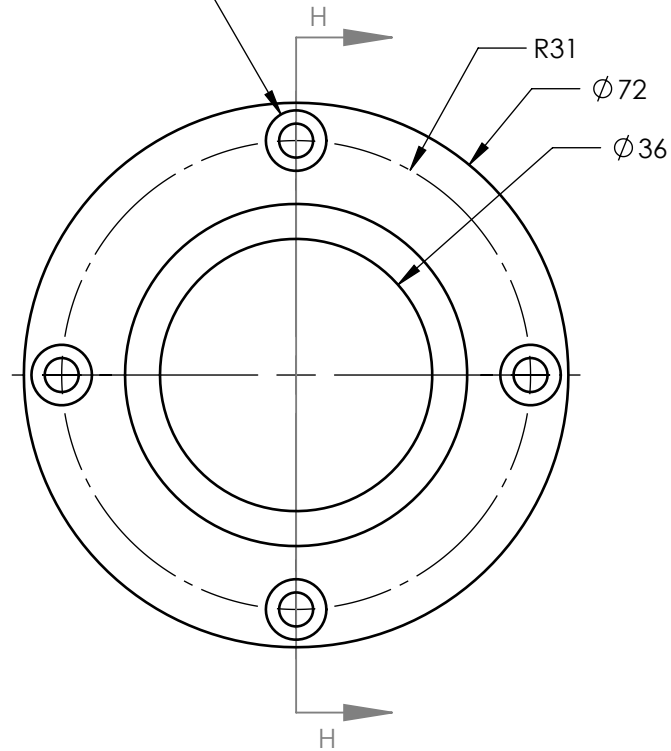

ISO VIEW NTS

©GREG ESAU 2019	LAST EDITED: 2019-06-25
TITLE: 003-101 - Screw Support	
MATERIAL: ALUMINUM 6061-T6	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: 0.8um TOLERANCES: LINEAR: 0.1 ANGULAR: 0.1
	DEBURR AND BREAK SHARP EDGES
	SCALE:1:2 A4 SHEET 21 OF 28

6


5

4

3

2

1


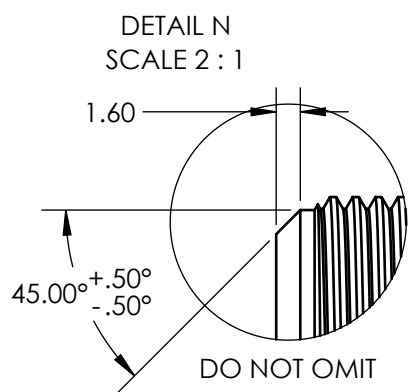


Ø 19.080^{H8 +0.033}₀




9.80

THREAD M25x1.5

SECTION J-J
SCALE 1 : 1.5

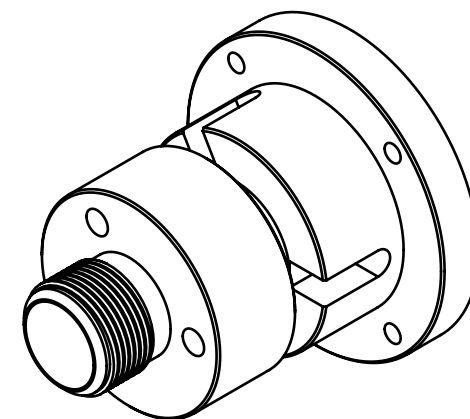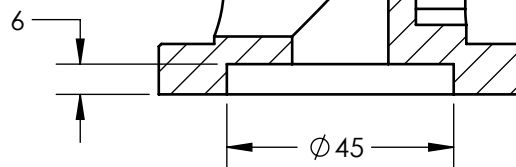

ISO VIEW NTS

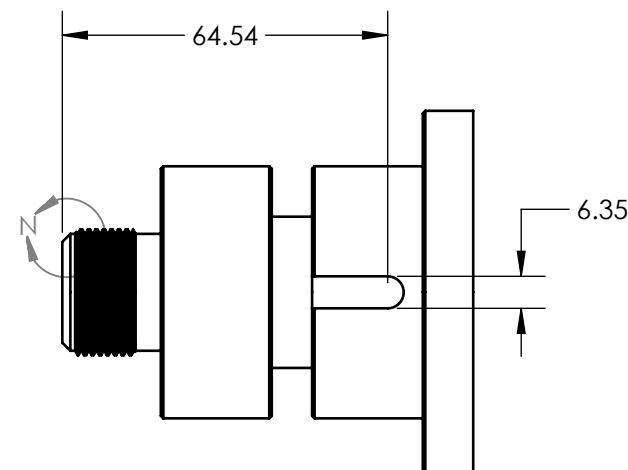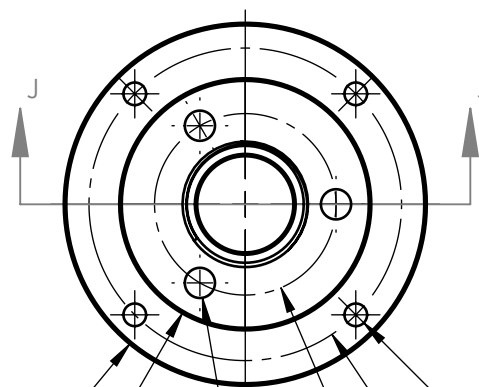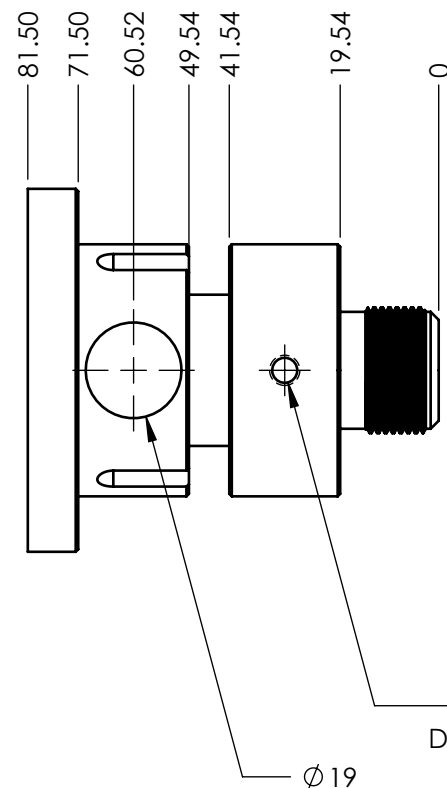

NOTES:

- THREE SLOTS ARE IDENTICAL AND IN LINE WITH HOLES
- CHAMFER DIMENSION ON THREAD IS IMPORTANT

MATERIAL:

ALUMINUM 6061-T6

©GREG ESAU 2019

LAST EDITED: 2019-06-25

TITLE:

003-103 - Extruder Barrel


UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH: 0.8um
TOLERANCES:
LINEAR: 0.1
ANGULAR: 0.1

DEBURR AND
BREAK SHARP
EDGES


SCALE:1:2
A4

SHEET 23 OF 28

ISO VIEW NTS



SECTION K-K

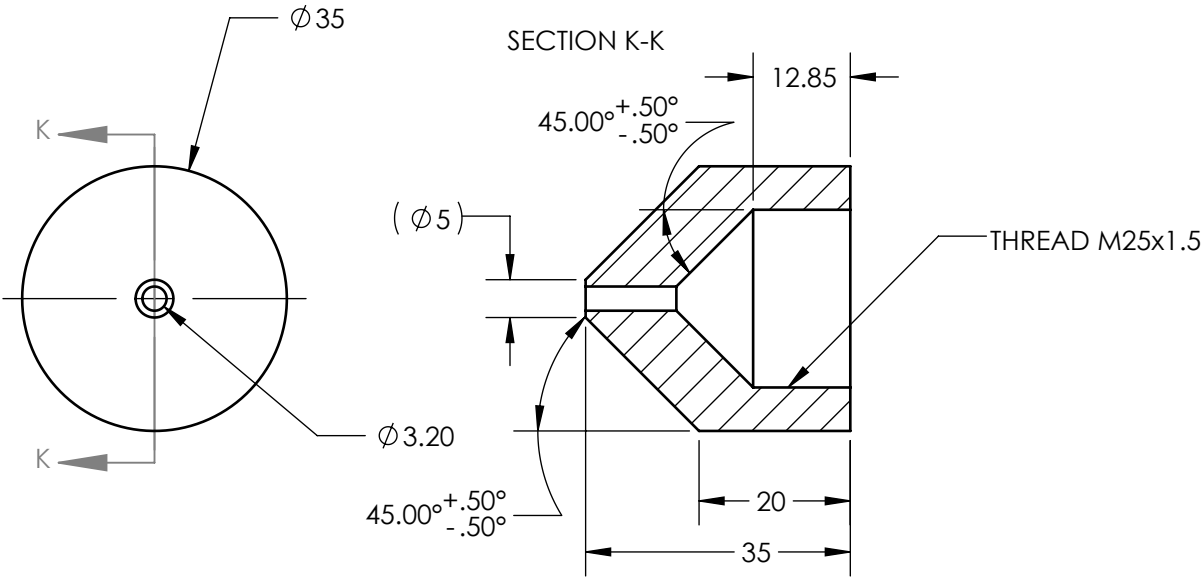

NOTES:

- BOTH 45 DEGREE ANGLES FORM SEALING SURFACE
- ANGULAR ACCURACY AND SURFACE FINISH SHOULD BE OPTIMIZED

©GREG ESAU 2019

LAST EDITED: 2019-06-25

TITLE: **003-104 - NOZZLE**

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH: 0.8um

DEBURR AND
BREAK SHARP
EDGES

SCALE:1:1
A4

TOLERANCES:
LINEAR: 0.1
ANGULAR: 0.1

SHEET 24 OF 28

MATERIAL:

ALUMINUM 6061-T6

D

D

C




C

B

B

A

A

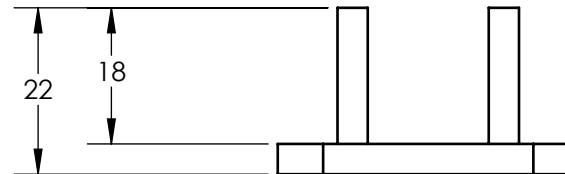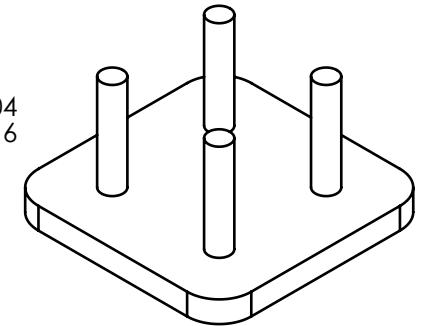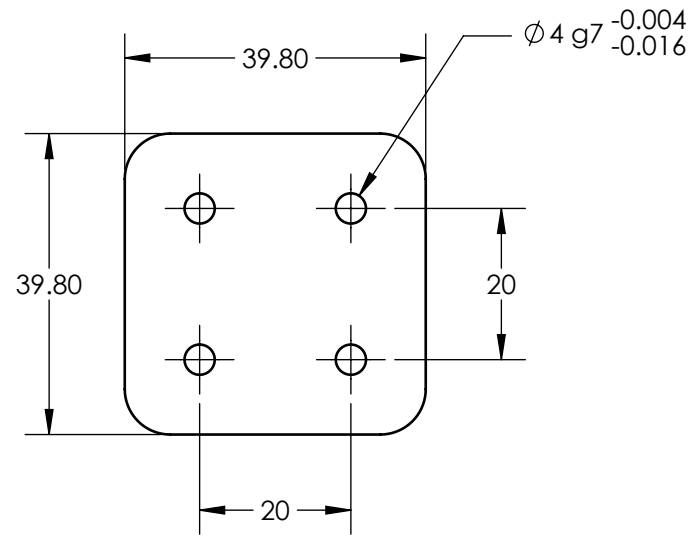

NOTES:

- THE DRAWINGS OF THE INDIVIDUAL CORE AND CAVITY BLANK PARTS SPECIFY AN H7/g7 FIT
 - THIS DOES NOT ACCOUNT FOR POSITIONAL TOLERANCES WHICH ARE DICTATED BY YOUR MOLD DESIGN

MATERIAL:

ALUMINUM 6061-T6

©GREG ESAU 2019

LAST EDITED: 2019-06-25

TITLE:

005-102 - Blank Ejector Plate

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH: 0.8um

DEBURR AND
BREAK SHARP
EDGES

SCALE:1:1
A4

SHEET 26 OF 28

TOLERANCES:
LINEAR: 0.1
ANGULAR: 0.1

6

5

4

3

2

1

NOTES

DRAWING NOTES

- THIS DRAWING PACKAGE OMITS ANY GD&T FORM, PROFILE, ORIENTATION AND LOCATION CONTROLS
 - THESE SHOULD BE FAIRLY INTUITIVE FOR MAKING ONE MACHINE
- FOR ANY DIMENSIONS THAT ARE NOT SHOWN, REFER TO THE ACCOMPANYING CAD

BUILDING NOTES

- WHILE THIS PROJECT MAY APPEAR SIMPLE, IT WILL REQUIRE MAINTAINING PRECISE TOLERANCES, THUS IT IS NOT SUITED TO HAND TOOLS OR BASIC DIY TOOLS
- I MAY RELEASE SOFTWARE FOR RUNNING THIS MACHINE LATER, HOWEVER I DO NOT CURRENTLY PLAN ON IT. MY SOFTWARE IS OFTEN INELEGANT AND REQUIRES CONSTANT TROUBLESHOOTING
- THE ELECTRONICS SPECIFIED IN THIS PACKAGE, PHIDGETS, ARE WELL SUITED TO USERS WITH A MODERATE COMPETANCY IN SCRIPTING LANGUAGES AND OBJECT ORIENTED PROGRAMMING. THEY ARE DECIDEDLY MORE COMPLICATED THAN ARDUINO-STYLE SYSTEMS. IF YOU ARE NOT COMFORTABLE WITH THIS FORMAT, RETROFITTING THE DESIGN WITH ARDUINO MAY BE A GOOD OPTION (I PROBABLY WILL AFTER TESTING)
- I DID NOT INCLUDE A HOPPER SYSTEM AS I INTEND TO USE A 2L SODA BOTTLE WITH A FABRICATED ADAPTOR
- THIS DESIGN WILL LIKELY BE SUPERCEDED IN THE FUTURE WITH A LONGER-BARREL VERSION
- I HAVE INCLUDED .STEP FILES AS WELL AS SOLIDWORKS FILES
 - IF ANY OF THE FILES CONTAIN CAM, I RECOMMEND IGNORING IT AND RESTARTING THE CAM FROM SCRATCH

TERMS OF USE

- This project is intended to express my appreciation for my Patreon backers who make it possible for me to make projects like these
- I have done NO calculations or simulations about the strength, failure modes, or longevity of this design
- These will all depend on the materials used, hardening condition, and cut parameters

INTELLECTUAL PROPERTY AND COPYRIGHT

- This device was designed and produced entirely by me
- There are no active patents in this device
- Some CAD files were acquired legally from the McMaster-Carr website and included in this model as a demonstration of compatible hardware offered by McMaster-Carr
- This model and drawing package were created on a legal copy of SolidWorks

BY DOWNLOADING THIS DRAWING PACKAGE AND/OR THE INCLUDED MODELS, YOU AGREE THAT:

- 1) I, the designer, hold no responsibility for injuries sustained with this device
- 2) I hold no responsibility for legal repercussions caused by production or possession of this device
- 3) I hold no responsibility for objects that get damaged in the production or use of this device
- 4) You, the donator, will not redistribute in whole or in part any of the information in this drawing package or the included solid models in any format
- 5) You, the donator, are free to make this device for yourself or for gifts, but you are not entitled to produce this device for commercial gain without my expressed permission.
- 6) While I will try my best to help where possible, I reserve the right to discontinue maintenance on this drawing and to provide no further assistance
- 7) I reserve the right to withdraw the availability of this drawing package or the models
- 8) I reserve the right to make this drawing package or models available on other platforms
- 9) You, the donator, are entitled to modify this design as you see fit, however modifications based on this original document or models remain subject to terms 1, 2, 3 and 4.