REPAIRING IMF PACKAGES USING IMF-TOOL

The initial development of this tool has kindly been sponsored by Netflix, Inc.

Contact

Prof. Dr. Wolfgang Ruppel Hochschule RheinMain Unter den Eichen 5 65195 Wiesbaden imftool@t-online.de

July 2017

Abstract

This document explains how certain defects in legacy IMF packages can be fixed. "Legacy" in that context refers to packages that are not compliant to the latest SMPTE standards published in 2016 (aka "IMF 1.1"). Legacy packages may also be missing metadata items like the CPL Essence Descriptor List, Multichannel Audio Descriptors etc.

WARNING

Make a backup copy of your IMF package before conducting any of the tasks below!

Supported tasks

- Updating the CPL(s) of an IMF package to SMPTE ST 2067-3:2016
- Editing CPL metadata: Content Title, Issuer, Content Originator, Annotation, Issuer, Content Version List,
 Locale List
- Re-wrapping of Audio Track files to include MCA descriptors and MCA metadata fields
- Re-wrapping of Timed Text track files

All workflow elements listed above are optional.

Users are encouraged to save CPL changes as new CPL (including a new UUID), although IMF-Tool also allows for saving modified CPLs under the same UUID.

Warning: Saving modified CPLs with the same UUID they had before applying changes may lead to significant issues when using a Media Asset Management System and is strongly discouraged.

Updating CPLs to SMPTE ST 20167-3:2016

IMF-Tool modifies all CPLs being opened to be ST 2067-3:2016 compliant, as soon as any change has been applied. E.g. editing of a single metadata field in the "Details" tab is sufficient.

The CPL can be saved as a new CPL (encouraged) or it can be saved overwriting the existing CPL and keeping the former CPL UUID (discouraged). After saving as a new CPL, the former CPL can (and probably should be) deleted by using the right-click "Remove" option available in the IMP browser or pressing "Delete" on the keyboard.

The new CPL will also contain all Essence Descriptors. No manual step needed to create Essence Descriptors.

Editing CPL metadata

Open a CPL and use the Tabs "Details", "ContentVersionList" and "LocaleList" to modify CPL metadata. Again, the CPL can be saved as a new CPL (encouraged) or it can be saved overwriting the existing CPL and keeping the former CPL UUID (discouraged). After saving as a new CPL, the former CPL can (and probably should be) deleted by using the right-click "Remove" option available in the IMP browser or pressing "Delete" on the keyboard.

Re-wrapping of Audio Track files to include MCA descriptors and MCA metadata fields


Step 1: Extracting the WAV files out of the MXF files

For this task, a third-party un-wrapper is required. We recommend as -02-unwrap from the asdcp Library [1]. You may also use any other common editing tools.


Using this tool, unwrapping on the command line works as listed as an example in Figure 2.

```
$ as-02-unwrap -1 bbb_English.mxf bbb_English_unwrapped
$ ls bbb_English_unwrapped*
bbb_English_unwrapped_01.wav bbb_English_unwrapped_03.wav bbb_English_unwrapped_05.wav
bbb_English_unwrapped_02.wav bbb_English_unwrapped_04.wav bbb_English_unwrapped_06.wav
```

Step 2: Creating new Assets using the WAV files from step 1.

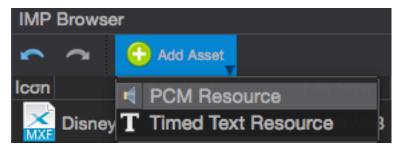


Browse for the WAV files, fill in all metadata fields. Make sure you correctly assign the channels to the WAV files!

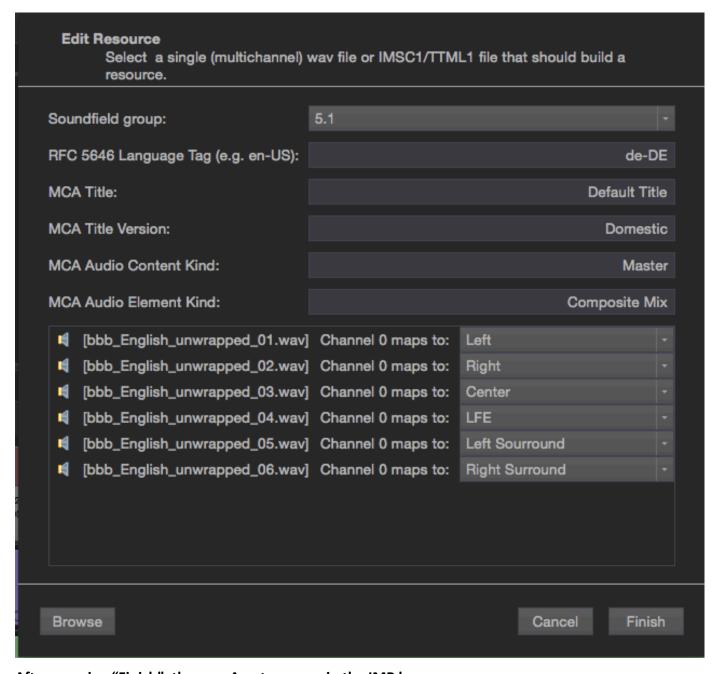


After pressing "Finish", the new Asset appears in the IMP browser:

IMP Browser				
~ ~	○ Add Asset			
lcon	rel. File Path	File Size	Finalized	Annotation
bbb_English.mxf		3.31 MiB		
CPL_6876bcd4- f858-46d3- aecf-3d2a88f33515.xml		3.51 KiB		
bbb.mxf		59.10 MiB	✓	
WAV_0	Da95b2d2-492f-48	Not Finalized		
	Essence Type: PCM		Duration: 00:00:04:00	
	Sampling Rate: 48000 Hz		Bit Depth: 24 bit	
	Channels: 6		Channel Configuration: 5.1	
	Essence Type: JPEG2000		Duration: 00:00:04:00	
	Frame Rate: 24		Stored Resolution: 1920 x 1080	
	Aspect Ratio: 1.77778 (16:9)		Displayed Resolution: 1920 x 1080	
	Color Mode: RGB(4:4:4)		Color Depth: 8 bit	
	Primaries: ITU709		OETF: ITU709	
4	Essence Type: PCM		Duration: 00:00:04:00	
	Sampling Rate: 48000 Hz		Bit Depth: 24 bit	
	Channels: 6		Channel Configuration: 5.1	
	Language: de-DE			

Add a new audio track to the CPL:

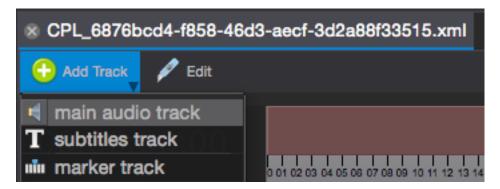


Your timeline looks like this, the track is initially empty:

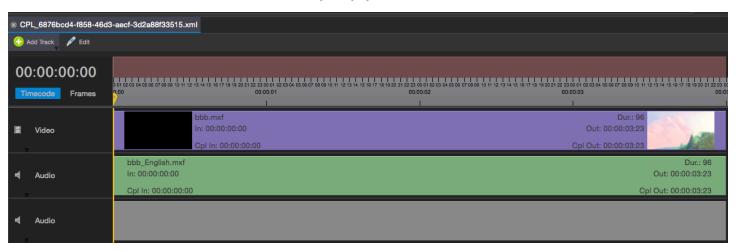

Drag & Drop the WAV Asset from the IMP browser into the timeline:


Note: Make sure to set edit point and duration by trimming like they were set before!

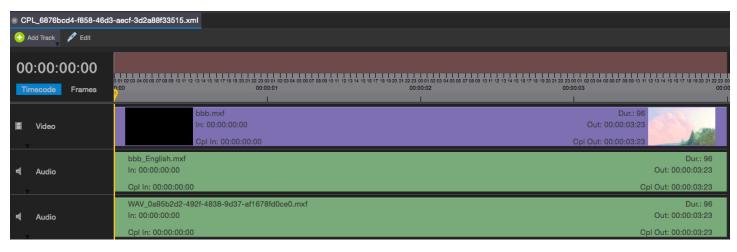


Remove the former audio track:




Your timeline looks like this:

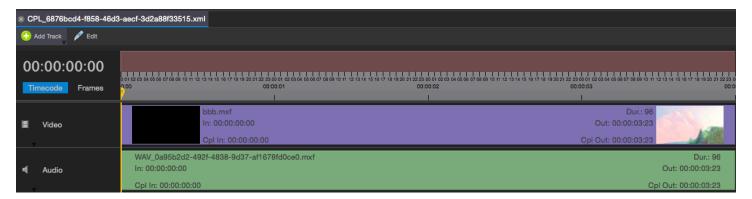


Save the timeline as a new CPL:



The new CPL appears in the second tab:

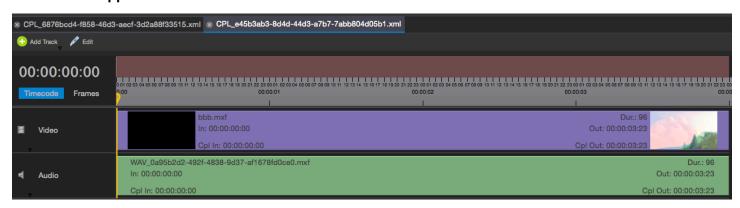

It is advisable to remove the old CPL from the package:

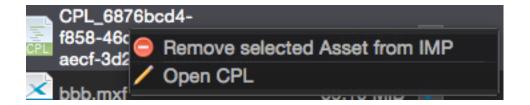

Finally, write the modified package to disk!

Note: The former CPL and the former audio track file will still exist on disk, although they are not referenced in the ASSETMAP and the PKL: You may safely delete them manually.



Re-wrapping of Timed Text track files

Works similar to the task for audio track files detailed above.

Notes

IMF Tool does not support video wrapping.

Contact & Support

Dr.-Ing. Wolfgang Ruppel

Media Technology Engineering

imftool@t-online.de

http://www.github.com/IMFTool/IMFTool