Build Overview:

MECHANICAL MANUFACTURING INSTRUCTIONS

FLOWMETER ASSY – CDU WATER

CHANGE HISTORY

Date	BPM Rev	Change Details	Updated by
	1	New Issue	JOSEPH AMAD

Prepared By:
JOSEPH R. AMAD
Manufacturing Engineer

Checked By:
IVAN NOWELL PANIQUE
Team Lead

Approved By:
SHERWIN ARIOSTE
Operations Manager

SPECIAL TOOLS

METHOD:

Flow chart of operation steps

SIC preparation
↓
Preparation Tools
↓
Prepare Materials
↓
Complete Operation
↓
Inventory Materials
↓
Operation Check
↓
Inventory tool

Size Hardware	Newton Meter
M2 x 0.4	0.2
M3 x 0.5	0.7
M4 x 0.7	1.6
M5 x 0.8	3.3
M6 x 1.0	5.6
M8 x 1.25	13.5

Torque Rules

- Torque values shown are for steel-to-steel material only.
- Torque all screws and nuts unless otherwise specified.
- Torque table is for reference. See MFE-500-01 for detailed information.

MAN: CERTIFIED OPERATOR, TECHNICIAN

FLOWMETER ASSY – CDU WATER

1. Obtain qty. 1 Flow Meter (668-070-00).

2. Cut cable to an overall length of 350 mm.

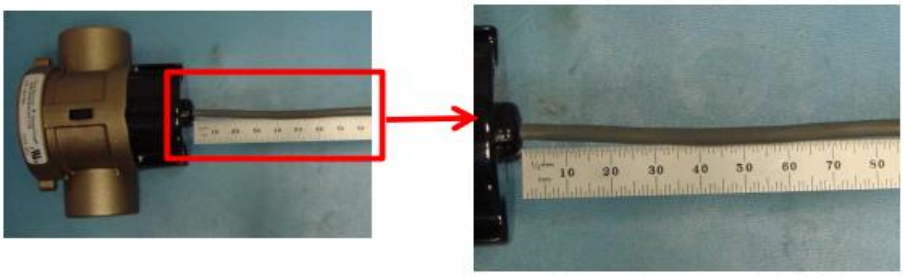

3. Strip the outer insulation jacket 20 mm. exposing the individual wires.

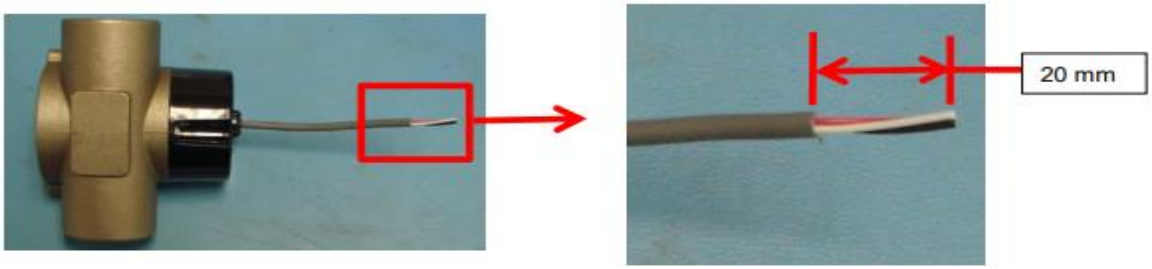

4. Strip the individual wires 5 mm. (X3).

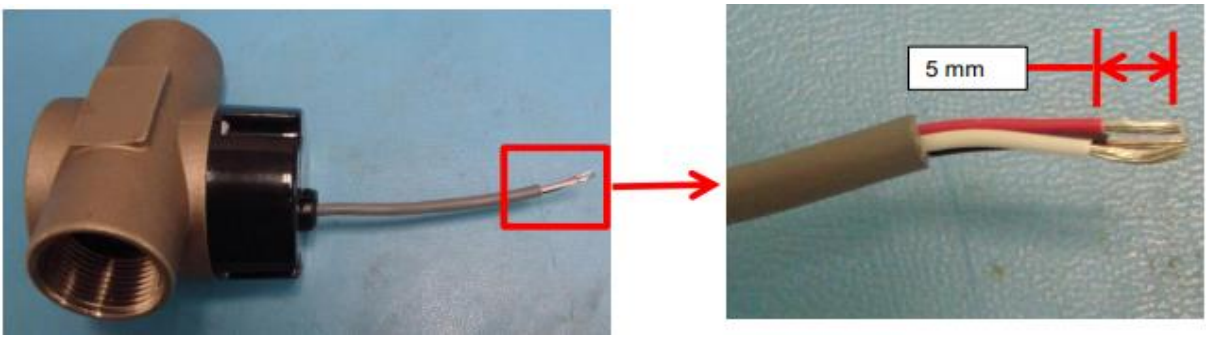

MAN: CERTIFIED OPERATOR, TECHNICIAN

FLOWMETER ASSY – CDU WATER

5. Crimp (X3) pin connectors (634-075-01) onto wires using a standard crimping tool.

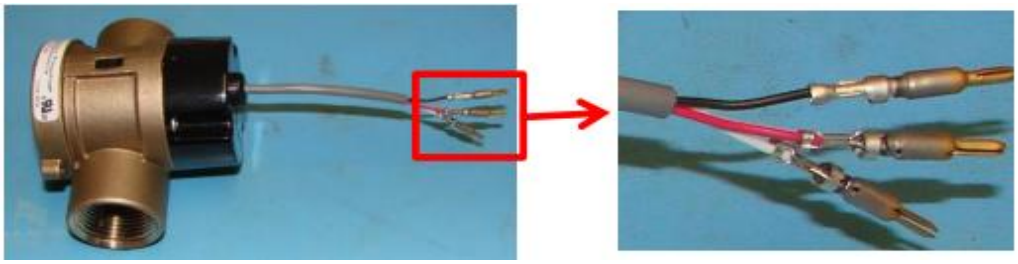

6. Obtain qty. 1 4 Pin Plug (359-494-04) kit which includes back and front housings.

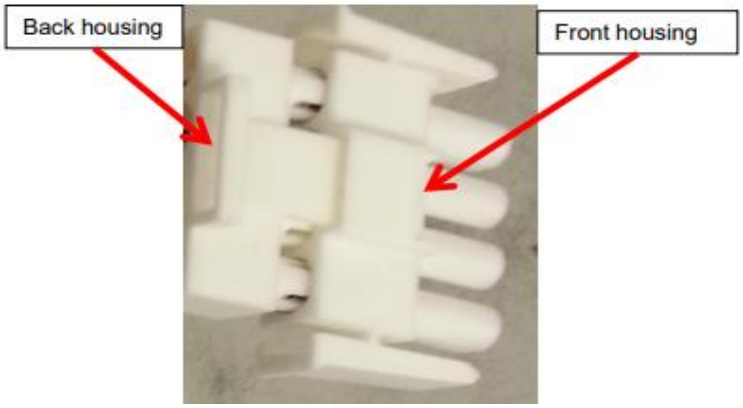

7. Take the back housing of the plug and Insert the pin connectors into the holes until they are fully seated.

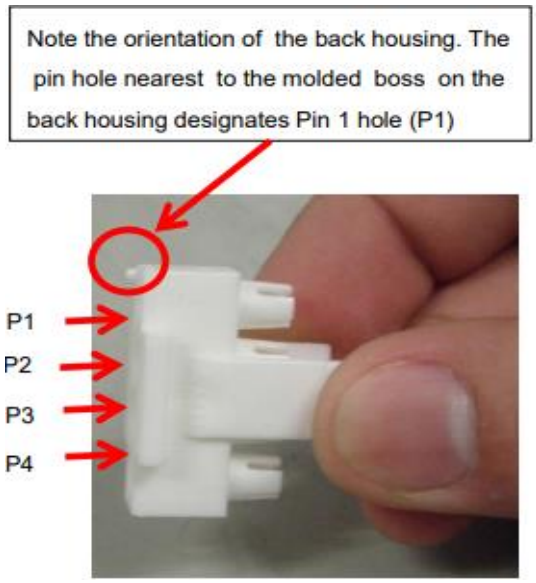

a. Insert Red wire into P1
b. Insert Black into P2
c. No Connection into P3
d. Insert White wire into P4

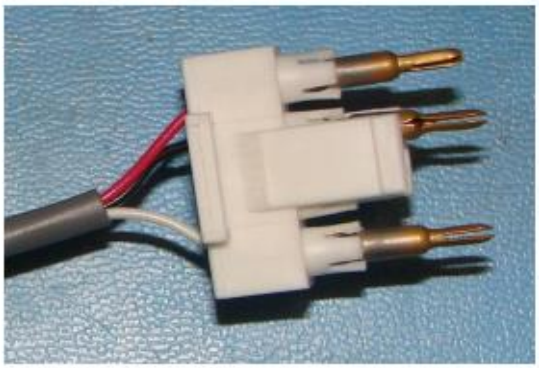

Safety Tips: N/A

MAN: CERTIFIED OPERATOR, TECHNICIAN

FLOWMETER ASSY – CDU WATER

8. Install the front housing onto the back housing by snapping in place.

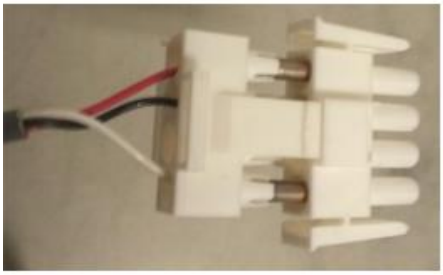



9. Create label and mark with location data as shown.

P20
(FT101)
FLOW METER

10. Create label and mark with part number 633-445-00, Rev * , and date of manufacture **XXYY**
   - Where * is the current revision of the part
   - Where XX defines the year and YY defines the week built

633-445-00 Rev. *
XXYY

11. Install labels on finished assembly.