

Stage Lighting Layout Plan

Plan view · rig, specials, marks and fixture schedule

R13.1 · 28 September 2026 · NOT TO SCALE — indicative, verify on site

LEGEND

-  Lightsky 8800-C42 LED profile ×12
-  Tour Pro Zoom RGBW wash ×10
-  TourCOB RGBW PAR ×11
-  PixBar linear bar ×6
-  Hazer ×1
-  Pinpoint (optional) ×2
-  Performer mark (special / voice)


#n = Mantra desk number = fixture ID - grey = universe:address

FIXTURE SCHEDULE

#	Type	Position	DMX	Focus / job
1	C42	FOH 1	U2:101	Face DSR — from house left (outer)
2	C42	FOH 2	U2:112	SP2 Spirit — DS audience-left mark
3	C42	FOH 3	U2:123	V1 Dame — voice-transfer mark 1
4	C42	FOH 4	U2:134	Face DSR — from house right (inner)
5	C42	FOH 5	U2:145	Face DSC — from house left
6	C42	FOH 6	U2:156	SP1 Ariel — DSC mark, shuttered tight
7	C42	FOH 7	U2:167	V2 Flanders — voice-transfer mark 2
8	C42	FOH 8	U2:178	Face DSC — from house right
9	C42	FOH 9	U2:189	Face DSL — from house left (inner)
10	C42	FOH 10	U2:200	SP4 Shell — plinth mark, shuttered to the shell
11	C42	FOH 11	U2:211	SP3 Octavia — US audience-right mark
12	C42	FOH 12	U2:222	Face DSL — from house right (outer)
13	ZM	LX1	U1:301	Top/front colour wash — DSR
14	ZM	LX1	U1:313	Top/front colour wash — DSC
15	ZM	LX1	U1:325	Top/front colour wash — DSL
16	ZM	LX1	U1:337	Top/front colour wash — CSR
17	ZM	LX1	U1:349	Top/front colour wash — CSC
18	ZM	LX1	U1:361	Top/front colour wash — CSL
19	ZM	LX2	U1:373	V3 Theodore — 13°, barn doors, steep top light
20	ZM	LX2	U1:385	V4 Marina — 13°, barn doors, steep top light
21	ZM	SR boom	U1:397	High side — top of boom (~2.8 m), across to SL, hea...
22	ZM	SL boom	U1:409	High side — top of boom (~2.8 m), across to SR, hea...
23	COB	LX2	U1:421	Backlight — DSR
24	COB	LX2	U1:427	Backlight — DSC
25	COB	LX2	U1:433	Backlight — DSL
26	COB	LX2	U1:439	Backlight — CSR
27	COB	LX2	U1:445	Backlight — CSC
28	COB	LX2	U1:451	Backlight — CSL
29	COB	SR boom	U1:457	Mid side — boom arm ~1.2 m, knee to hip
30	COB	SR boom	U1:463	Low side (shin) — boom arm ~0.4 m
31	COB	SL boom	U1:469	Mid side — boom arm ~1.2 m, knee to hip
32	COB	SL boom	U1:475	Low side (shin) — boom arm ~0.4 m
33	PIX	pelmet/LX2	U1:1	3 fixed on the pelmet front (tabs/apron wash), 3 on...
34	PIX	pelmet/LX2	U1:7	3 fixed on the pelmet front (tabs/apron wash), 3 on...
35	PIX	pelmet/LX2	U1:13	3 fixed on the pelmet front (tabs/apron wash), 3 on...
36	PIX	pelmet/LX2	U1:19	3 fixed on the pelmet front (tabs/apron wash), 3 on...
37	PIX	pelmet/LX2	U1:25	3 fixed on the pelmet front (tabs/apron wash), 3 on...
38	PIX	pelmet/LX2	U1:31	3 fixed on the pelmet front (tabs/apron wash), 3 on...
39	COB	LX2 wall	U1:481	Extra backlight/side from the wall bracket by LX2 —...
40	HAZE	Floor, US	U1:487	Atmosphere — P5 M4 HAZE (50 %, fan 50 %)
41	PIN	FOH SR end	U1:37	Mirror ball (optional, not patched)
42	PIN	FOH SL end	U1:38	Mirror ball (optional, not patched)

Modes: C42 11 ch · Zoom 12 ch · COB 6 ch · PixBar 6 ch · hazer 2 ch. Keep strobe / macro / CCT at 0.

UPSTAGE ↑

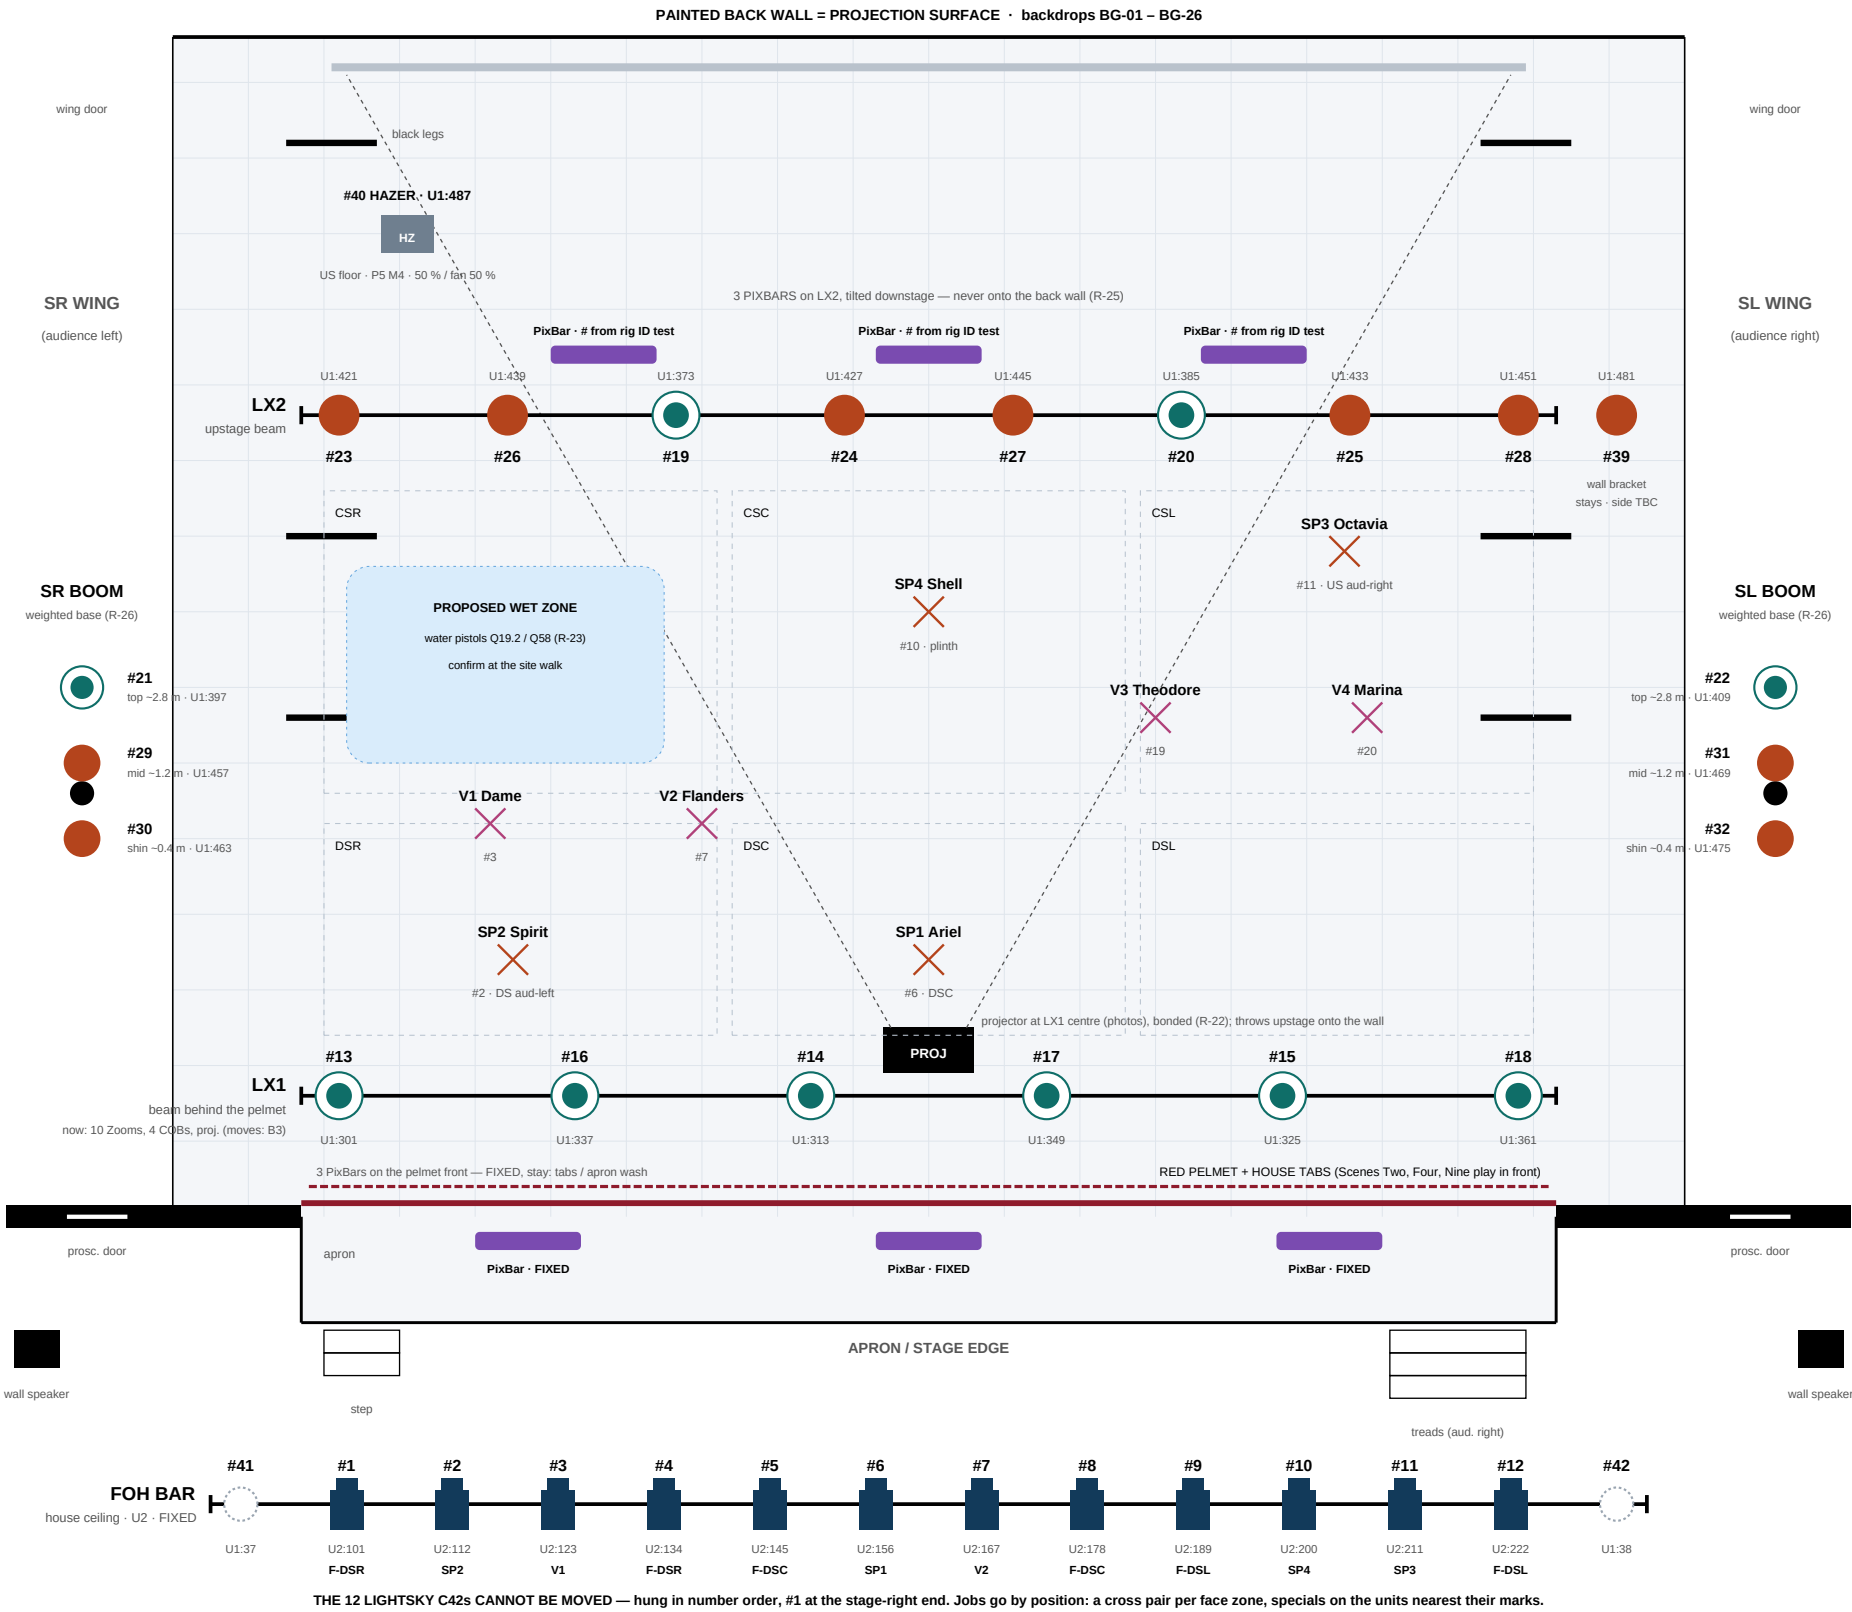

AUDIENCE (flat floor, loose chairs)


DOWNSTAGE / HOUSE ↓

FOH bar hangs from the house ceiling · second ceiling rail further back (spare position, check load) · control at the back (QLab Mac, Mantra, StudioLive)


Stage Lighting Layout Plan — sections, booms and checks

Side section and boom elevations are indicative. Record the measured trim heights and positions at the site walk.

SIDE SECTION (looking from SL)

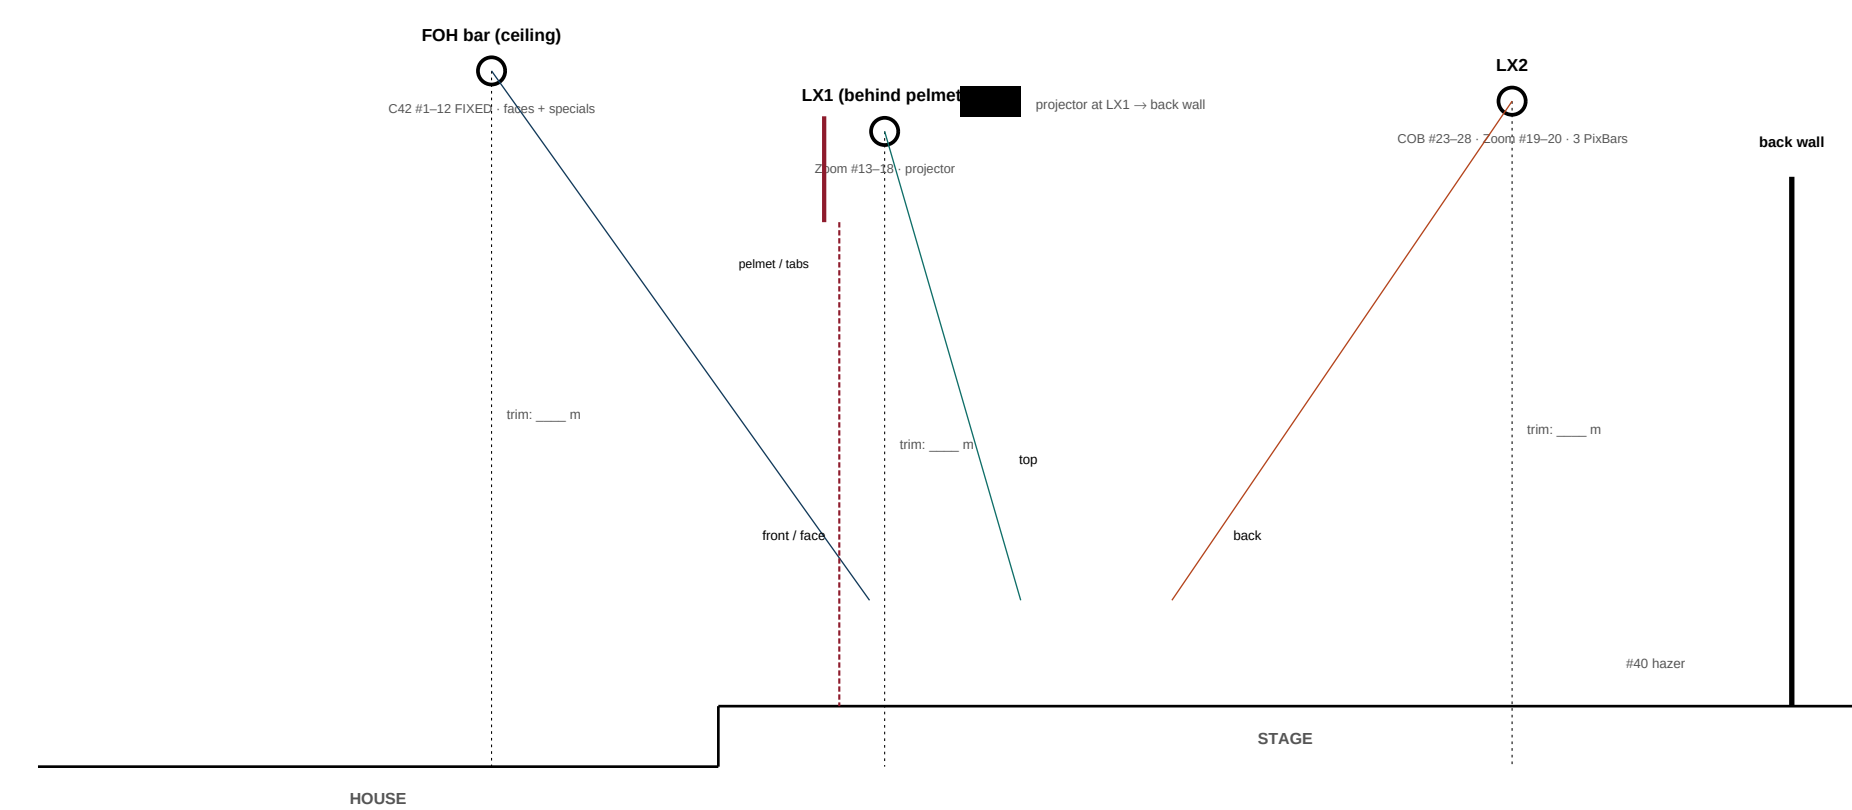

BOOM ELEVATIONS (from on stage)

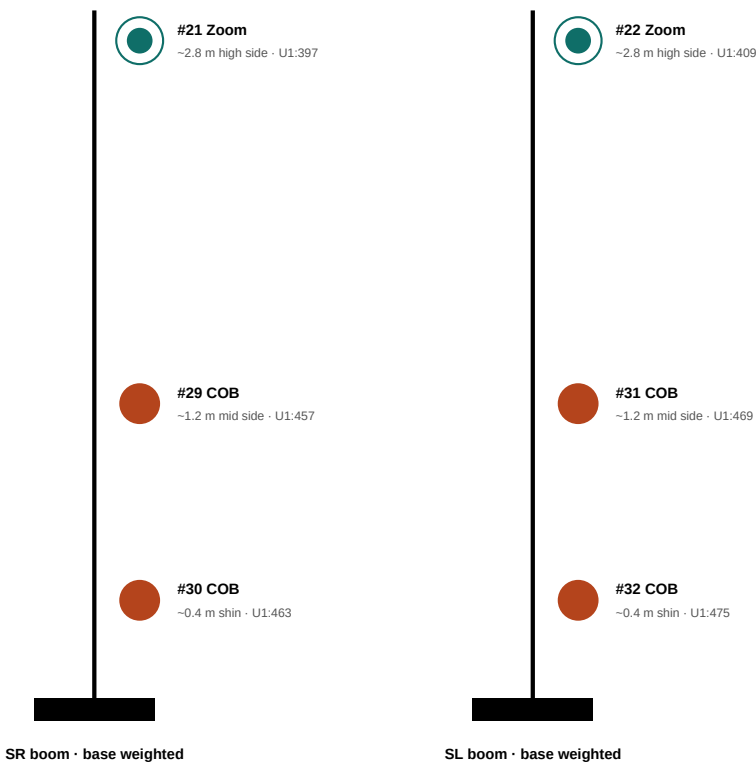

SPECIALS AND MARKS

Special	Character	Fixture	Mark / use
SP1	Ariel	#6 C42 (FOH)	DSC mark; solo, duet, transformation, restore (57c)
SP2	Spirit	#2 C42 (FOH)	DS audience-left mark; every Spirit entrance
SP3	Octavia	#11 C42 (FOH)	US audience-right; entrances, lair, wedding interruption
SP4	Shell	#10 C42 (FOH, shuttered tight)	Plinth mark; brightest point in Scene Eight
V1	Dame	#3 C42 (FOH)	Voice-transfer mark 1 (Q53)
V2	Flanders	#7 C42 (FOH)	Voice-transfer mark 2 (Q54)
V3	Theodore	#19 Zoom 13° + barn doors (LX2)	Voice-transfer mark 3 (Q55)
V4	Marina	#20 Zoom 13° + barn doors (LX2)	Voice-transfer mark 4 (Q56)

AS INSTALLED (venue photos) → PLAN

Position	Installed now	Plan
FOH bar (house ceiling)	C42 #1–12 in number order, #1 at the stage-right end	FIXED — cannot be moved. Jobs are given by position (faces #1+4, #5+8, #9+12; specials #2, 3, 6, 7, 10, 11).
Pelmet, in front of the main curtain	3 PixBars; speakers at each end	FIXED — stay. They colour the house tabs and apron for the front-of-tabs scenes (Two, Four, Nine) and join the storm, magic and song effects; check glare into the front rows at the focus.
LX1, beam behind the pelmet	10 Zooms #13–22, 4 COB PARs (#29–32, confirm), projector at the centre	Keep #13–18 (top wash). #19–20 to LX2 (V3/V4 steep top light); #21–22 and the 4 COBs to the SR/SL booms (side light). Projector stays.
LX2, upstage beam	6 COB PARs (#23–28, confirm) with PixBars between them	Stays as the backlight and effect row; add #19–20.
Side wall by LX2 (back right)	1 COB PAR (#39, confirm)	Stays: extra backlight / side.

DATA ROUTE

U1 (desk XLR): LX1 → pelmet PixBars → LX2 → #39 → SR boom → SL boom → hazer · terminate

U2 (Art-Net/SACN): desk → switch → node 2.0.0.10 → FOH bar C42 #1–12 · terminate

Every fixture keeps its desk number and address wherever it hangs.

SITE-WALK CHECKS

- ☐ C42 #1–12 fixed: confirm the order (#1 SR end) and focus each job from where it hangs
- ☐ Rig ID test: which COB PARs and PixBars are on LX1, LX2, the pelmet (fixed) and the wall
- ☐ Bar loads and trims for FOH, LX1, LX2 (R-24)
- ☐ LX1 beam rated for the projector (it hangs there now); projector bonded (R-22)
- ☐ Boom bases weighted, clear of props tables and water stations (R-26)
- ☐ LX2 and PixBars tilted off the back wall; check washout with BG-02/BG-18 (R-25)
- ☐ Fixtures #38 PixBar and #39 TourCOB fitted and patched
- ☐ Wet zone agreed; towels and stage-dry checks (R-23)
- ☐ Hazer position vs detectors; isolation procedure agreed (R-13)
- ☐ Marks SP1–SP4 and V1–V4 taped after blocking

NOTES / MEASUREMENTS