

ASSIGNMENT-4

DISTANCE DETECTION USING ULTRASONIC SENSOR

Date	20 October 2022
Team ID	PNT2022TMID01694
Name	DIVYASREETHA M
Student Roll Number	7376191EC129
Maximum Marks	2 Marks

Question1 :

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

WOKWI LINK :

<https://wokwi.com/projects/305566932847821378>

CODE :

```
1 #include <WiFi.h> //library for wifi
2 #include <PubSubClient.h> //library for mqtt
3
4
5 void callback(char* topic, byte* payload, unsigned int payloadLength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "ibm" //IBM ORGANIZATION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in IBM Watson IoT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in IBM Watson IoT Platform
12 #define TOKEN "wssrOPRj2SagYkktz" //Token
13 String data;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/rest/data/fmt/json"; // topic name and type of event perform and format in which data to be send
20 char subscribeTopic[] = "iot-2/cmd/test/fmt/string"; // cmd. represent command type and command in text or format string
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientID[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wificlient; // creating the instance for wificlient
28 PubSubClient client(server, 1883, callback, wificlient); //calling the predefined client id by passing parameter like server id, port and wificredetial
29
30 int led = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);
```

```
36  pinMode(trig,OUTPUT);
37  pinMode(echo,INPUT);
38  pinMode(LED, OUTPUT);
39  delay(10);
40  wificonnect();
41  mqttconnect();
42  }
43  void loop()// Recursive Function
44  {
45
46      digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distance in cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59          mqttconnect();
60      }
61  }
62
63
64
65  /*.....retrieving to Cloud.....*/
66
67  void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70      |   creating the String in in form JSon to update the data to ibm cloud
```

```

70 | | creating the String in in form JSON to update the data to ibm cloud
71 */
72 String object;
73 if (dist <100)
74 {
75   digitalWrite(LED,HIGH);
76   Serial.println("object is near");
77   object = "Near";
78 }
79 else
80 {
81   digitalWrite(LED,LOW);
82   Serial.println("no object found");
83   object = "No";
84 }
85
86 String payload = "{\"distance\":";
87 payload += dist;
88 payload += "," " \"object\":";
89 payload += object;
90 payload += "\"}";
91
92
93 Serial.print("Sending payload: ");
94 Serial.println(payload);
95
96
97
98

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager

```

99
100 if (client.publish(publishTopic, (char*) payload.c_str())) {
101   Serial.println("Publish ok");// if it successfully upload data on the cloud then it will print publish ok in serial monitor or else it will print publish failed
102 } else {
103   Serial.println("Publish failed");
104 }
105
106 void mqttconnect() {
107   if (!client.connected()) {
108     Serial.print("Reconnecting client to ");
109     Serial.println(server);
110     while (!client.connect(clientId, authMethod, token)) {
111       Serial.print("-");
112       delay(500);
113     }
114
115     initManagedDevice();
116     Serial.println();
117   }
118 }
119 void wificonnect() //function definition for wificonnect
120 {
121   Serial.println();
122   Serial.print("Connecting to ");
123
124   WiFi.begin("Weki-GUEST", "", 0);//passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126     delay(500);
127     Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());


```

```
123
124   WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
133 }
134
135 void initManagedDevice() {
136     if (client.subscribe(subscribetopic)) {
137         Serial.println((subscribetopic));
138         Serial.println("subscribe to cmd OK");
139     } else {
140         Serial.println("subscribe to cmd FAILED");
141     }
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadlength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadlength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // }
159 }
```


```

142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // digitalWrite(LED,HIGH);
159
160     // }
161
162     // else
163     // {
164     // Serial.println(data3);
165     // digitalWrite(LED,LOW);
166
167     // }
168     data3="";
169
170
171 }

```

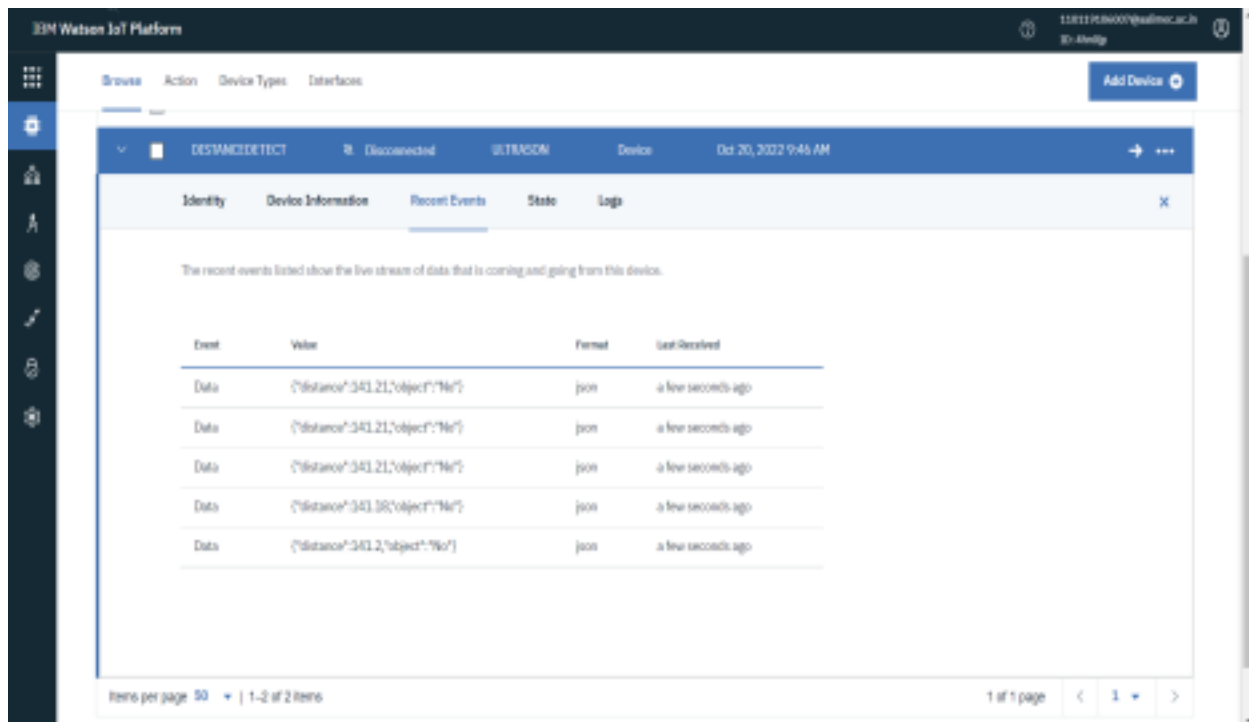

when object is near to the ultrasonic sensor

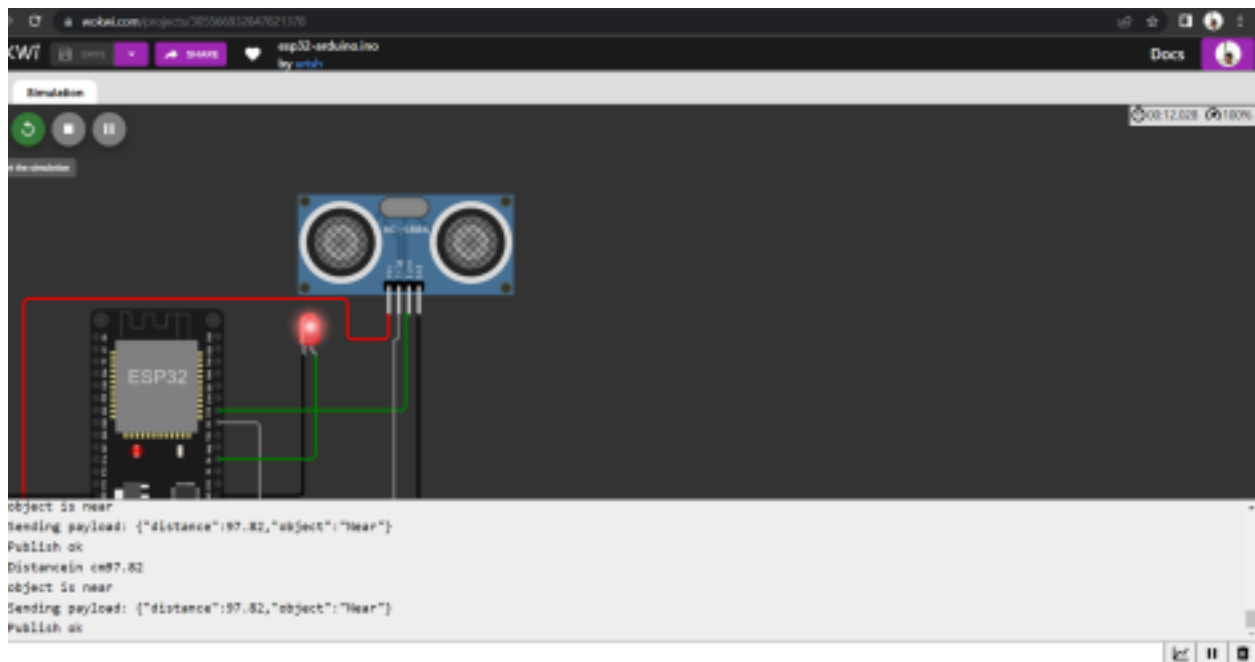

Data sent to the IBM Cloud Device when the object is near

IBM Watson IoT Platform

13811936687@redhat.com
In Activity

Browse Action Device Types Interfaces

DESTINATOR:TEXT Disconnected ULTRASON Device Oct 20, 2022 9:46 AM

Identity Device Information **Recent Events** State Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.64,"object":"Near"}	json	a few seconds ago
Data	{"distance":79.66,"object":"Near"}	json	a few seconds ago

Items per page 50 | 1-2 of 2 items

1 of 1 page

<https://wokwi.com/projects/305566932847821378>