


EVIDENCIAS

Metodo GET

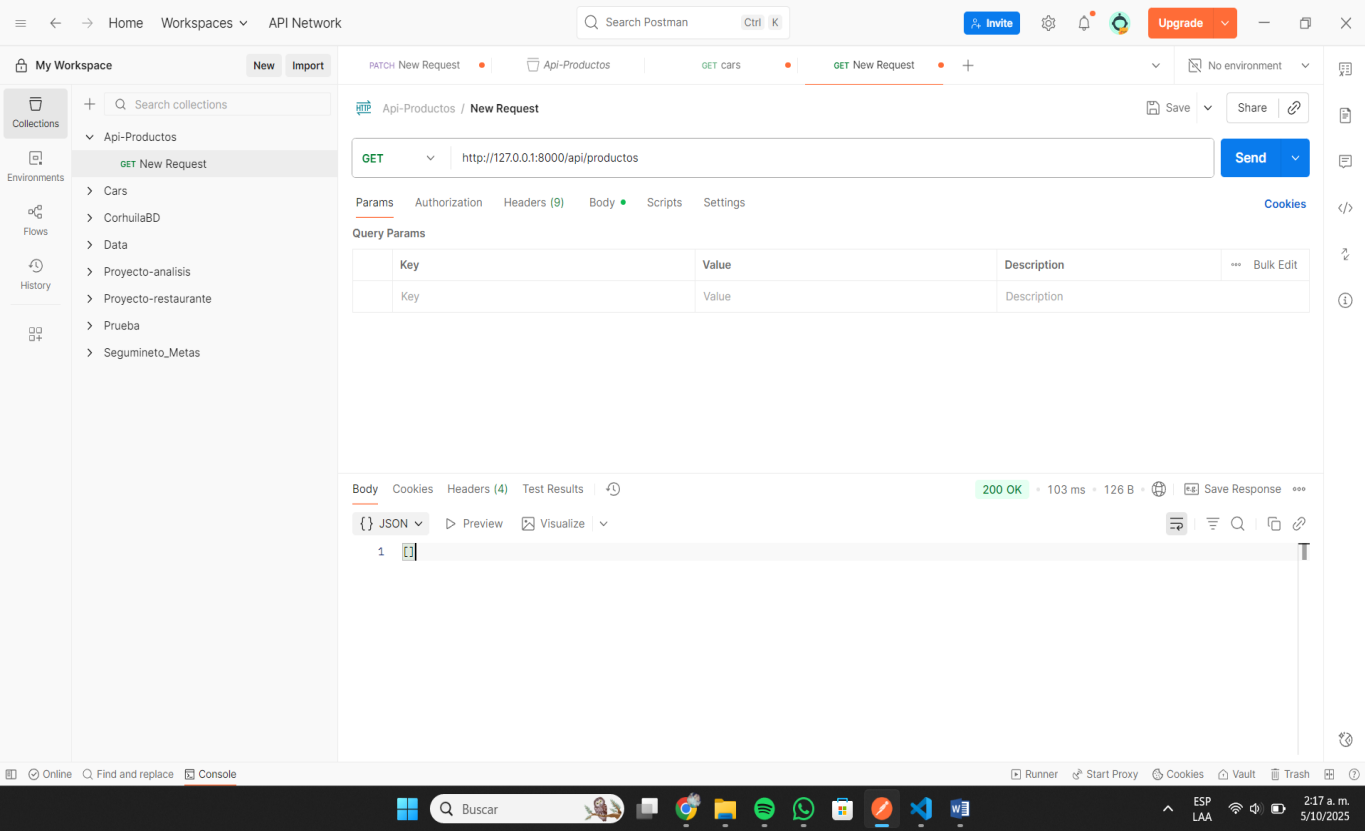

Metodo POST

The screenshot displays the Postman application interface. On the left sidebar, under 'My Workspace', the 'Api-Productos' collection is expanded, showing a 'POST New Request'.

The main panel shows the 'New Request' configuration for the endpoint `http://127.0.0.1:8000/api/productos`. The request method is set to **POST**. The 'Body' tab is selected, showing a raw JSON payload:


```
1 {
2   "nombre": "Camiseta Negra",
3   "descripcion": "Camiseta de algodón 100%",
4   "precio": 59.99,
5   "stock": 50
6 }
7 |
```

Below the request configuration, the response is displayed. The status is **200 OK**, with a response time of 31 ms and a body size of 311 B. The response is shown in JSON format:

```
1 {
2   "nombre": "Camiseta Negra",
3   "descripcion": "Camiseta de algodón 100%",
4   "precio": 59.99,
5   "stock": 50,
6   "id": "a3350ef5-c781-44a7-a83e-8588b9b5fe5d",
7   "fecha_creacion": "2025-10-05 02:18:26.720655"
8 }
```

The bottom of the image shows the Windows taskbar with the search bar and various application icons. The system clock indicates 2:18 a.m. on 5/10/2025.

Metodo PUT

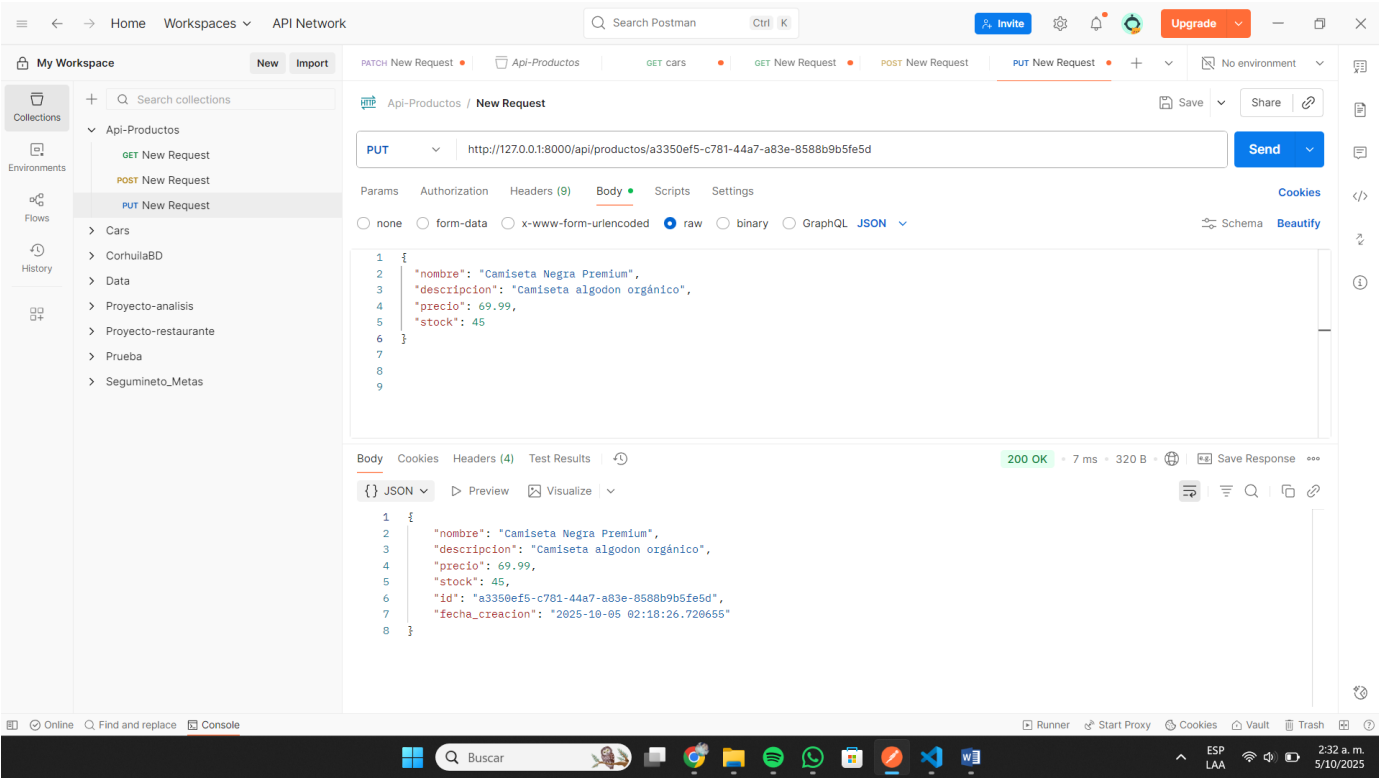

Metodo DELETE

