1. OVERVIEW

This work instruction describes the procedure of cleaning the ESD workstations.

2. ESD STATIONS CLEANING PROCEDURE

1. The ESD station needs to be cleaned daily at the end of every shift. The procedure is included in the daily 5S activity for the verification area.

2. Start the cleaning by removing the trash, extra supplies, and debris from the tables and the floor.

3. After removing the trash, empty the trash bins and return them to the designated spots, marked with white tape on the floor.

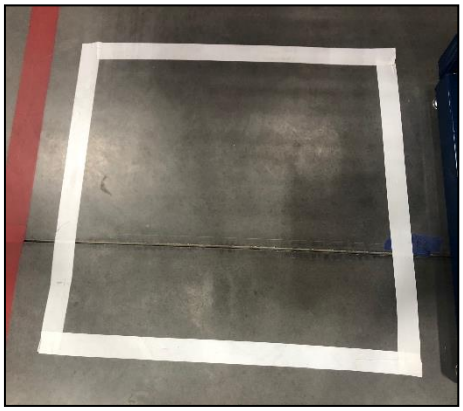

4. Place all the equipment used at the stations to their designated locations (ESD tape, scanners, supplies, vacuum pen, scissors, ESD wrist ties, tape guns).

5. Refill the supplies at each station if they are low/empty.

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

6. Refill the printers with media/ribbons if necessary.

7. Spray and wipe the workstation area with the ESD spray.

8. Make sure that the vacuum sealer, compressor, and reel counter are powered off.

3. REFERENCES

Document #	Document Title
N/A	N/A

4. REVISION HISTORY

The following table lists all revisions (including the original document) to this procedure, the date, and the reason for the revision.

Rev.	Rev. Date	Description of Change	Revised By
01	10/17/22	Original issue	P. Eroshenko
02	03/07/23	Rebranded	A.Cabrera

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.