1. OVERVIEW

These work instructions outline the process for printing labels using the Oracle ERP system.

2. PRINT LABELS USING ORACLE

1. Log into the Oracle system.
2. Choose the appropriate responsibility. ZTC Reconfiguration is used as an example. Click OK.

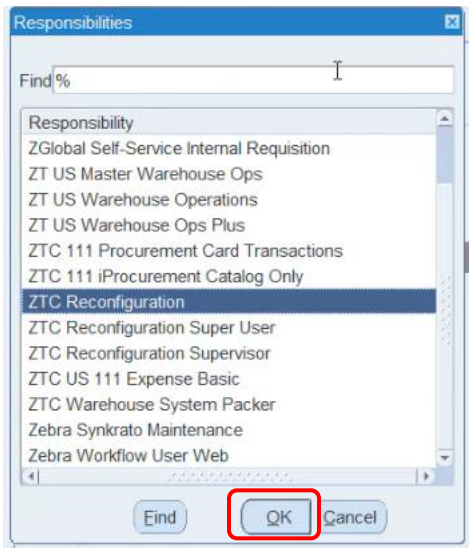

3. Hover over the View Menu and select Requests.

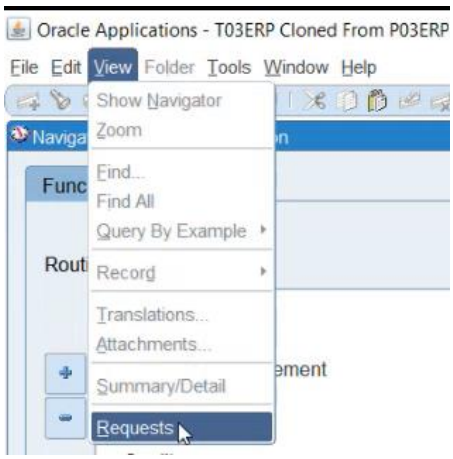

4. Select Submit a new request.

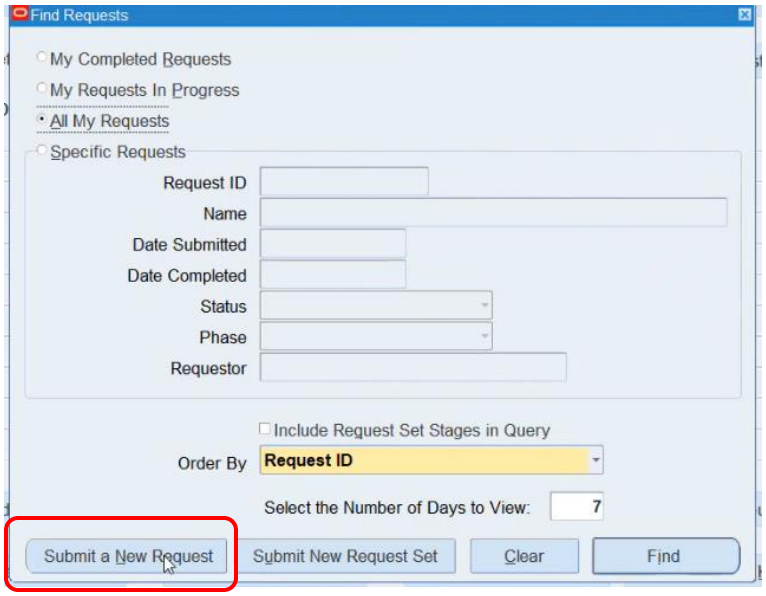

5. In the name field, enter **%manual** and hit enter. It will populate the reports associated with the wording you enter.

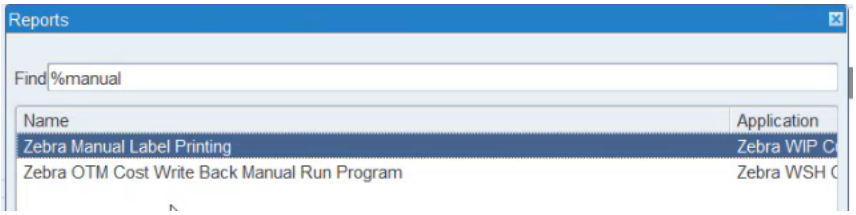

6. Select **Zebra Manual Label Printing**.
7. In the Error screen, click OK to enter the parameters.

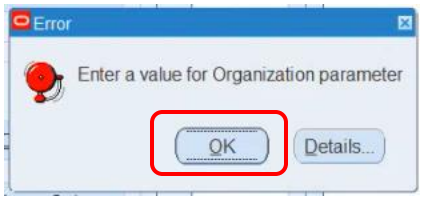

8. In the Parameters screen, enter the Org (TX4). Once you enter the org, the mandatory fields will be in yellow, and the optional fields will be in white.

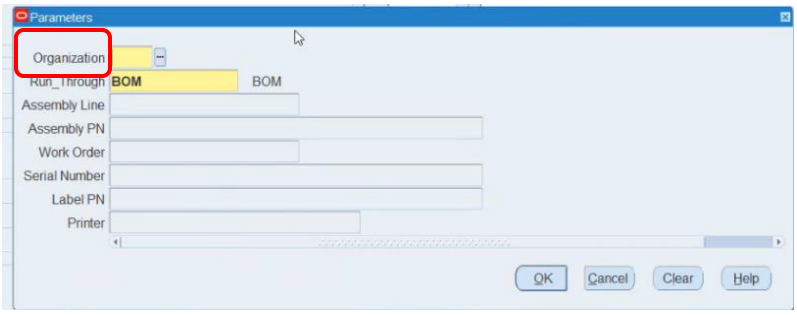

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

9. In the Run-through field, select the three dots to display the options. Select **WIP-JOB**.

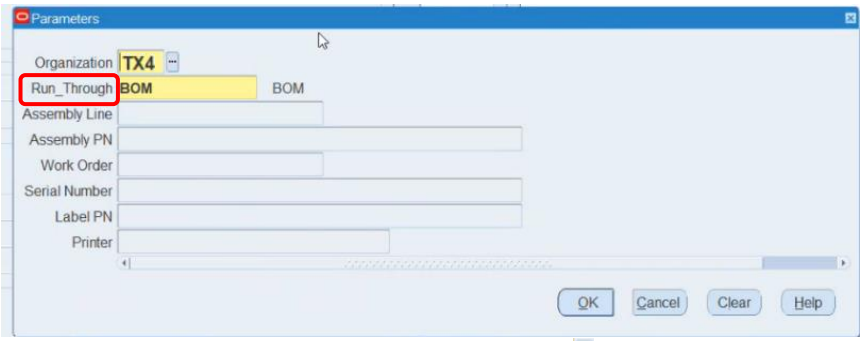

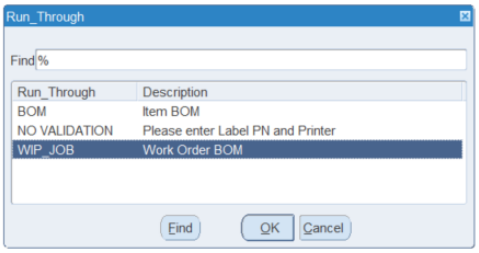

10. In the Assembly Line field, click on the three dots to display the options. Select the appropriate line from the list.

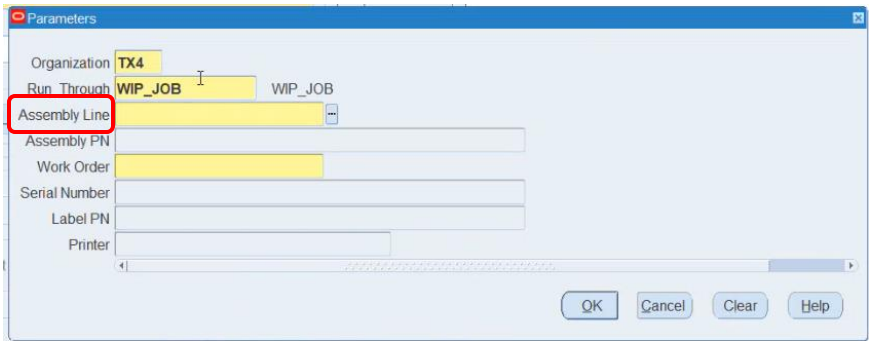



11. In the Work Order field, enter the work order number.

12. Hit Tab, and the Serial Number field will display and become mandatory if the material is serialized. Scan the serial number from the traveler. Click OK to print all label PNs associated with the order, or see optional capabilities below.

- ✓ Note: If the SN was completed in MWA on a work order, the LPN it's on must be dropped first before reprinting.
- ✓ Do not click on the three dots for options; you must scan the traveler's or printer's serial number.

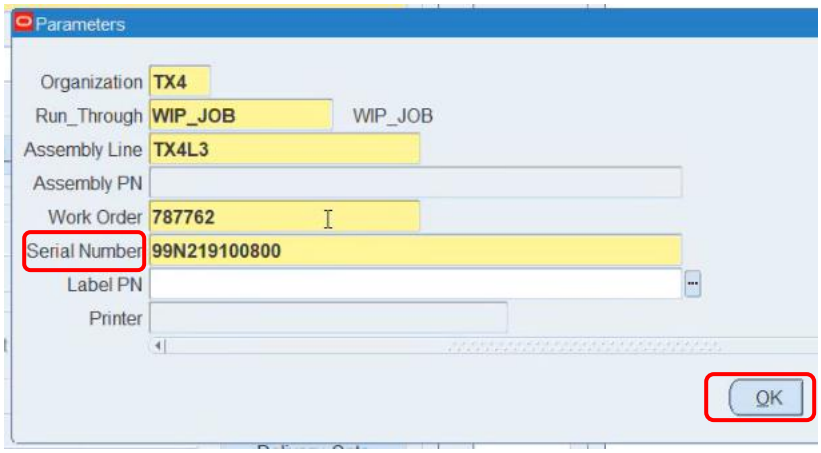

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

13. (Optional) If you need to print only one of the Labels, in the Label PN field, click on the three dots ··· for options and select the Label Part Number you need.

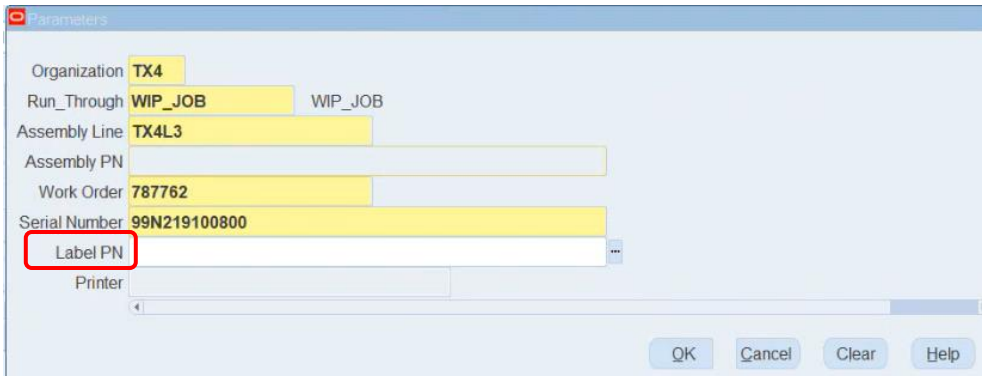

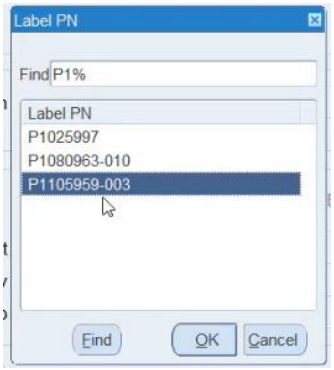

✓ If you scan or enter the wrong part number, the system automatically displays the Label part numbers available on the work order. The below example will not print.

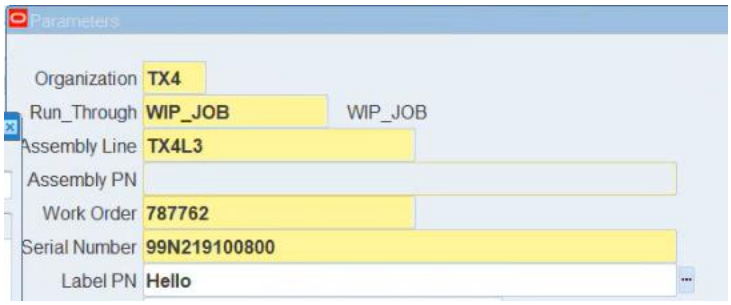

14. (Optional) If you attempt to print only one of the part labels on the work order, the printer field will be enabled, allowing you to enter the printer of your choice.

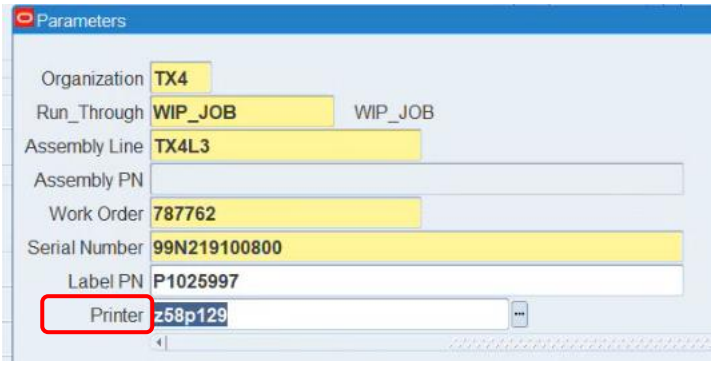

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

- ✓ The printer's name should be entered with lowercase letters even though the label shows uppercase.
- ✓ The printer's name you enter in the parameters screen will override the selected assembly line.

15. Click Submit

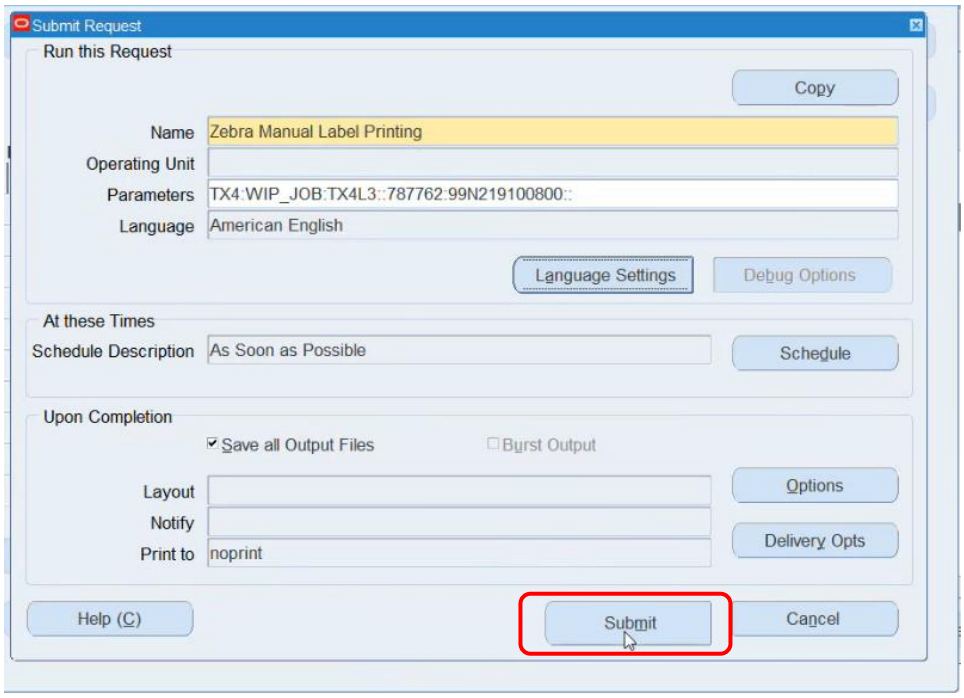

- ✓ It will trigger printing for all the labels on the work order.



- ✓ Make the appropriate selection on the window that displays.

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

3. Reprint Labels

If you must reprint a Label, you will follow the steps listed above.

Steps 3-14 to reprint all the part labels on the work order.

Steps 15 to reprint one of the labels on the work order.

Step 16 is optional.

4. Alternative Printing Options

For printing labels for product that is not on a work order, use either of the two options below.

1. Follow steps 1-8 in Section 2 to open the proper request form.
2. In the Run-through field, select the three dots to display the options. Select either **BOM** or **NO VALIDATION**.
   - **i.** Use **BOM** when needing to print a label PN that's on the Assembly PN's BOM.
   - **ii.** Use **NO VALIDATION** when the desired label PN is not on the Assembly PN's BOM.

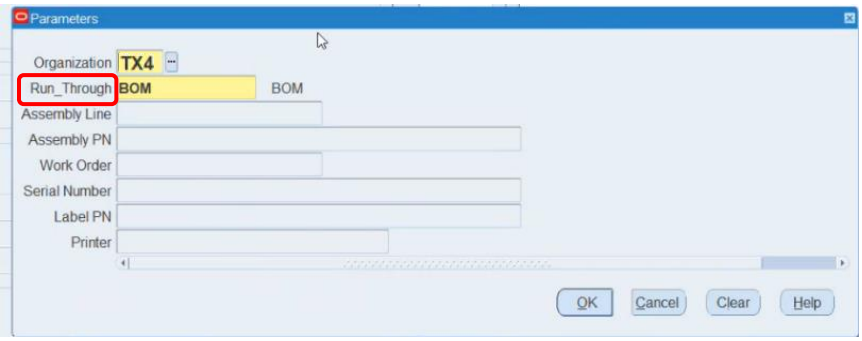

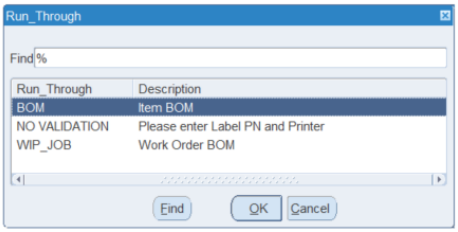

   - **iii.** Note: The below steps apply for <u>both</u> **BOM** and **NO VALIDATION** options, unless stated otherwise.
3. Assembly Line field, click on the three dots to display the options. Select the appropriate line from the list.

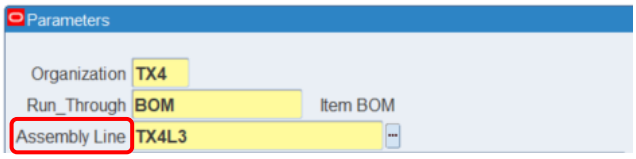



4. In the Assembly PN field, enter the assembly part number.

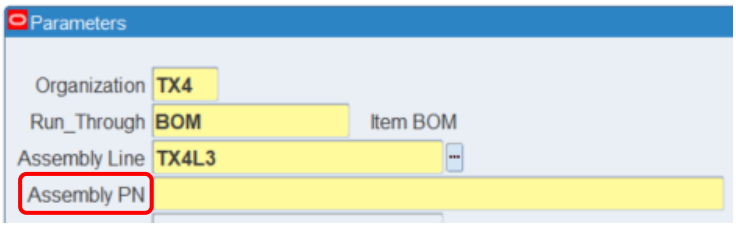

5. Hit Tab. The Serial Number field will display and become mandatory if the material is serialized. Scan the serial number from the traveler.

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

i. **BOM:** Click OK if finished or see optional capabilities below.

ii. **NO VALIDTION:** Follow next steps to specify a label PN and printer (they are <u>not</u> optional in this case).

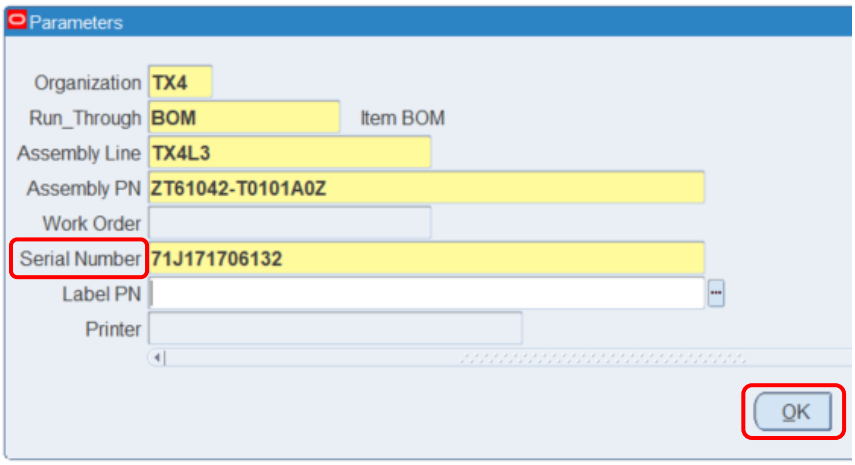

✓ Do not click on the three dots for options; you must scan the traveler's or printer's serial number.

6. (Optional for **BOM**) If you need to print only one of the Labels, in the Label PN field, click on the three dots for options and select the Label Part Number you need.

i. **NO VALIDATION**: Enter the desired label PN. Do not use the three dots (they do not apply in this situation).

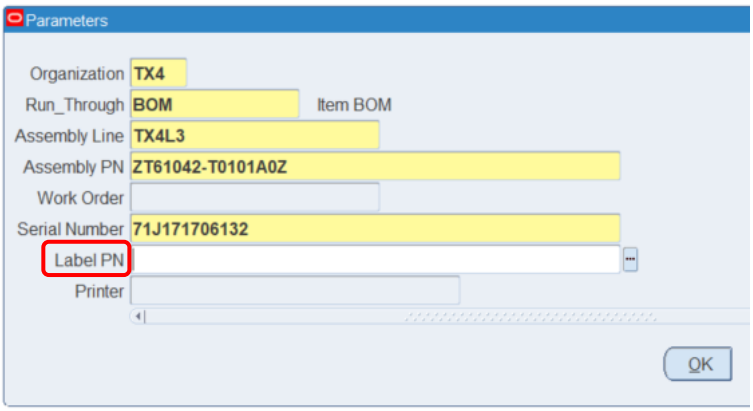

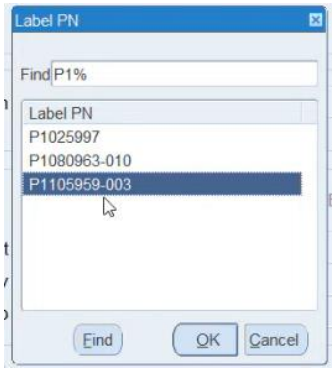

✓ If you scan or enter the wrong part number, the system automatically displays the labels for the part number. The below example will <u>not</u> print.

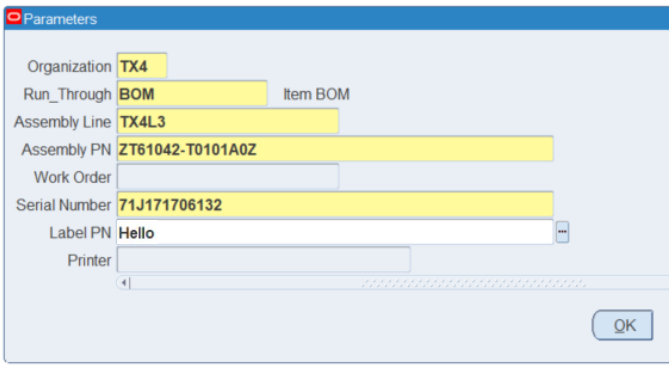

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

7. (Optional for **BOM**) If you attempt to print only one of the labels, the printer field will be enabled, allowing you to enter the printer of your choice.

   i. **NO VALIDATION**: Enter the desired printer.

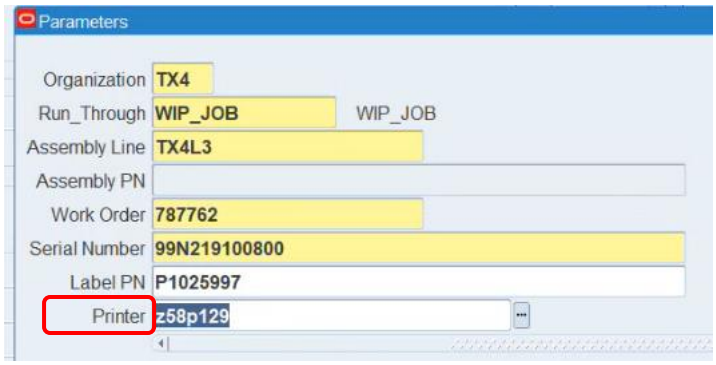

✓ The printer's name should be entered with lowercase letters even though the label shows uppercase.

✓ The printer's name you enter in the parameters screen will override the selected assembly line.

8. Click Submit

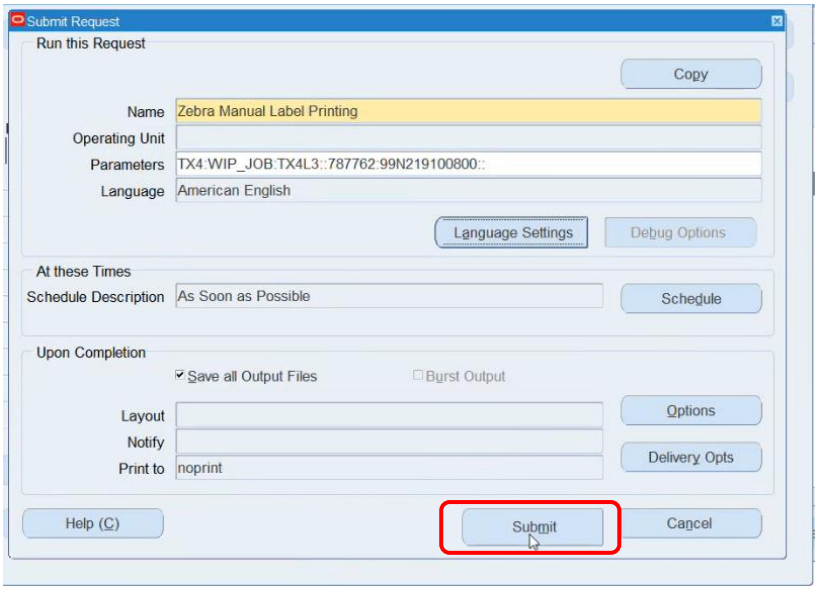

✓ It will trigger printing for all the labels on the work order.



✓ Make the appropriate selection.

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

5. View Requests – Reprint Warning

In the Find Requests screen, you can view the requests you submitted.

1. Change the number of days to view to 1

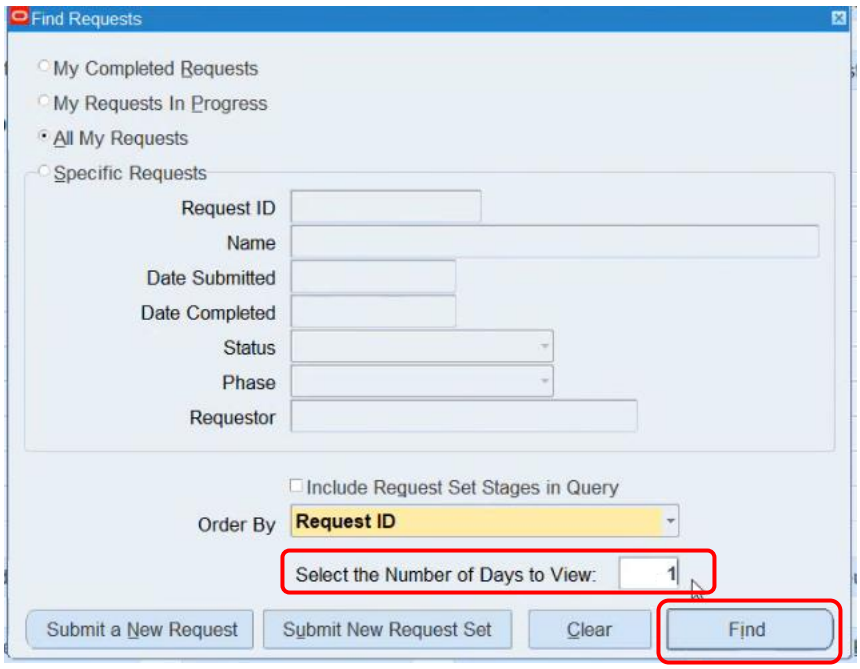

2. Click Find.

3. If the Status states Normal, the labels should have been printed.

4. If the Status states Warning, the labels were previously printed; therefore, it is a reprint.

- ✓ The warning is a sign of caution and indicates at least 1 label is a reprint. It does not prevent labels from printing. It's okay to reprint labels if needed.
- ✓ Verify the Label and the Serial number on the labels is correct.

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.

6. References

Document #	Document Title

7. Revision History

The following table lists all revisions (including the original document) to this procedure, the date, and the reason for the revision.

Rev.	Rev. Date	Description of Change	Revised By
01	04/08/2024	Original issue	A.Cabrera
02	07/11/2024	Added BOM and No Validation options	A. Rosenbloom

This document contains proprietary information which is the exclusive property of Zebra Technologies Corp.

The most recent version of this document is located on the ISO Library.
Verify revision number before use.