



# How to update the password in CMS


1. Open the CMS application.
2. Click Login at login screen.

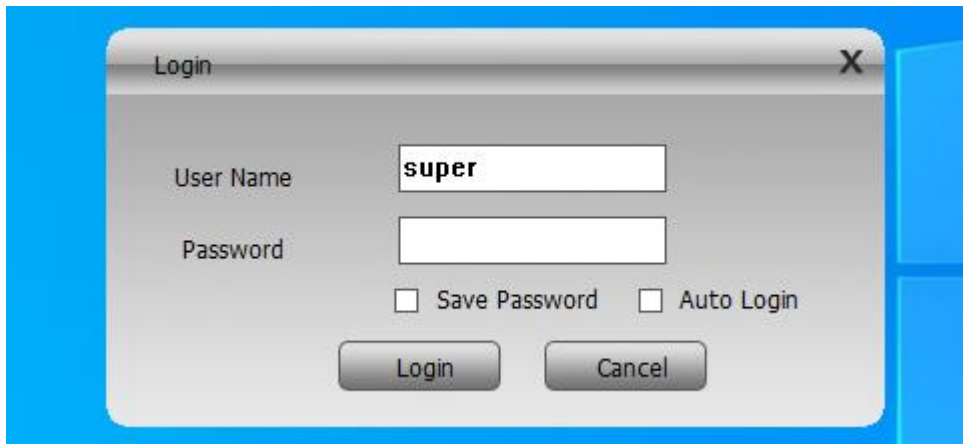


3. Click the System option from the menu on the lower right-hand side of the screen by left clicking on it.

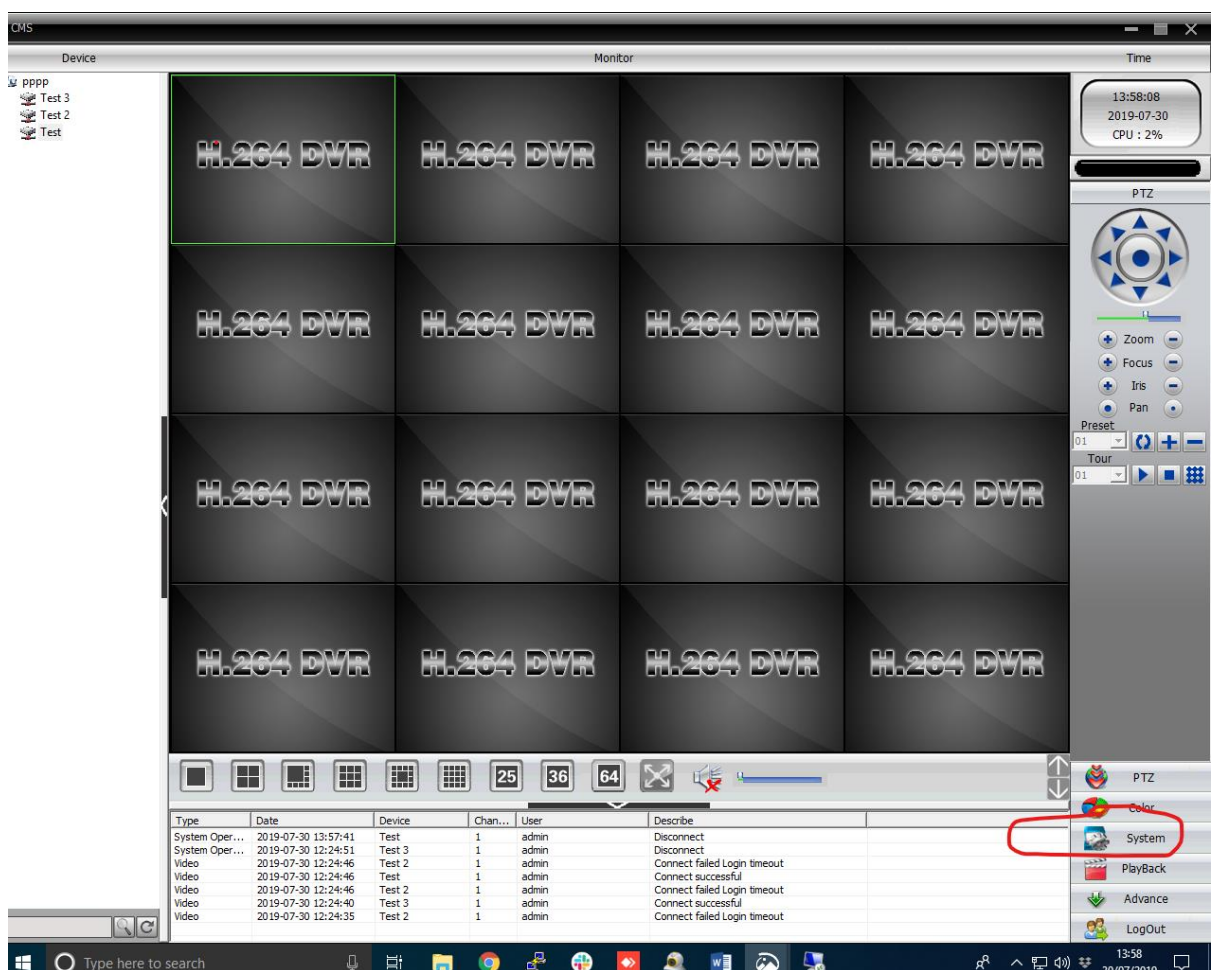

4. Then choose Device Manager from the new options that appear above the previous menu by left clicking on it

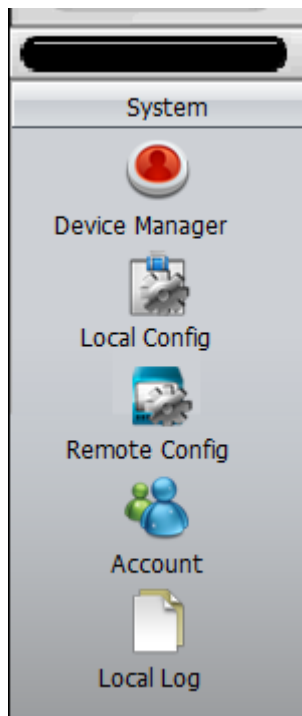

5. In the newly opened Device Manager page, select your device from the list.
6. Then in the same page, click on the MODIFY icon at the top.

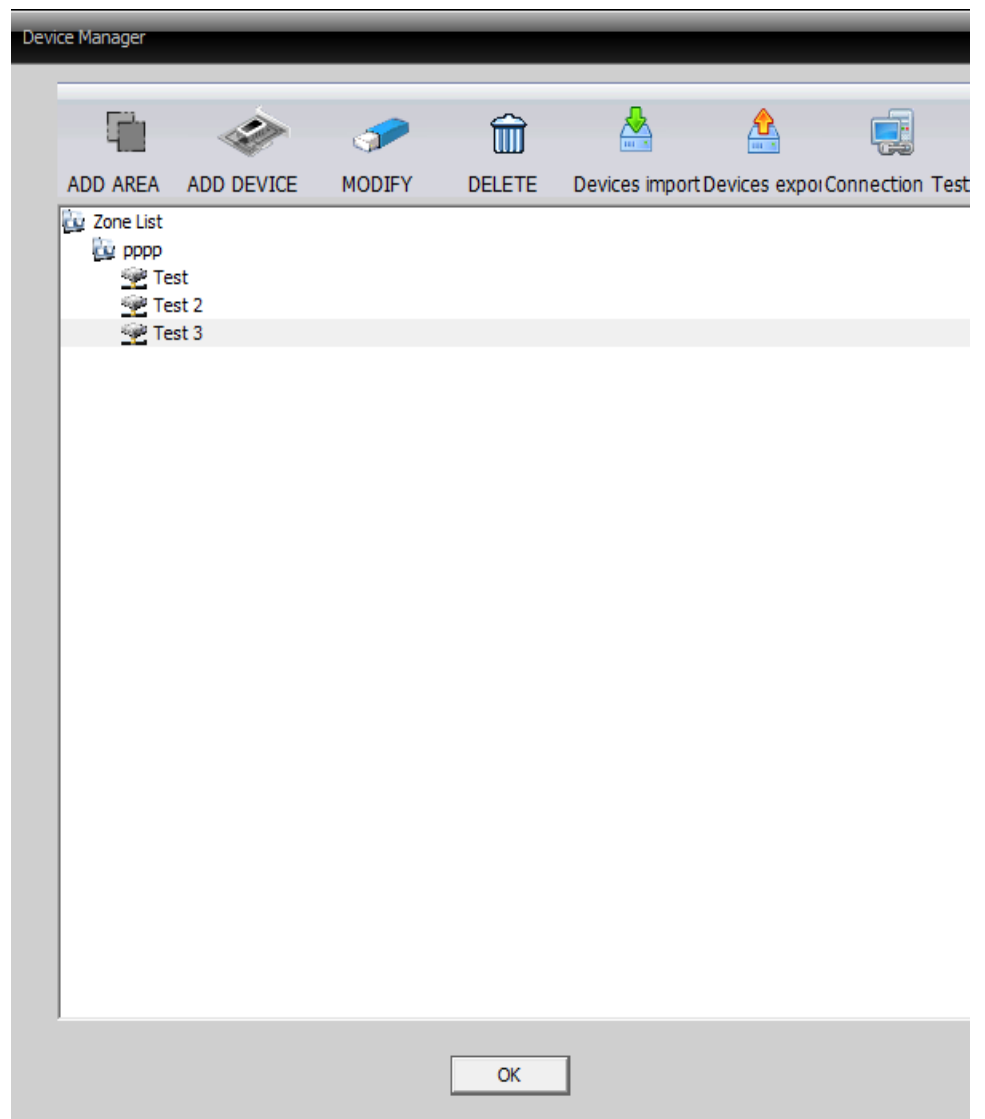

7. Key in the password you have been given into the Password box and click OK.

NO. IP Address Port MAC Vendor

☐ ShowAddedDevice ☐ OnvifSearch IP Search IPV6Search EditDevice

Device Name Test 3

LoginType ☐ IP Address ☐ Domain ☐ ARSP ☒ Cloud ☐ IPV6

Serial ID 1eb24c93ea4e58d8

User Name admin Password

Zone pppp

Vendor H264DVR

OK Cancel

8. Click OK to close the Device Manager screen.
9. That is the password updated in CMS. You should now be able to connect to your DVR as normal in future without entering the password each time you connect.