
ARCHITECTURE CIVIL ENGINEERING
PLANNING BRANDING
INTERIORS BUILDING MEASUREMENTS

Professional Engineer (Electrical)
 CERTIFICATE NO.
 30536
 WILLIAM J.
 MATHURUM, IV
 State of Florida
 EXPIRES: 09/30/26

1000

DATE	REMARKS
11/01/2024	1DC-074 1FG FULL CD PACKAGE
12/17/2024	1FG 074-074 REVISIONS
03/17/2025	1FG CD REVISIONS
03/17/2025	1FG CD REVISIONS
05/19/2025	1FG CD REVISIONS
05/19/2025	1FG CD REVISIONS
08/21/2025	1FG PERMIT ADDENDUM
08/21/2025	1FG PERMIT ADDENDUM

SHEET

1F0-E626

A. REFERENCE FEEDER SCHEDULE, E011

B. CABLE LENGTHS WHEN INDICATED ON ONE-LINE ARE APPROXIMATE AND ARE FOR REFERENCE ONLY FOR CALCULATIONS AND ARE NOT TO BE USED FOR MATERIAL TAKEOFFS.


C. SECONDARY UNIT SUBSTATIONS: REFER TO SPECIFICATION #26 11 16 12.

D. UNIT SUBSTATION SCADA COMMUNICATIONS SHALL INCLUDE ALL HARDWARE DEVICES TO COMMUNICATE I/O (VIA MODBUS TCP COMMUNICATIONS) INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING:

- PRIMARY SWITCH STATUS (OPEN/CLOSED)
- TRANSFORMER WINDING TEMPERATURE
- TRANSFORMER FAN RUN STATUS
- BREAKER STATUS
- POWER METER DATA

E. ALL SWITCHBOARDS, SWITCHGEAR, AND PANELBOARDS SUPPLIED BY FEEDERS SHALL BE PERMANENTLY MARKED TO INDICATE EACH DEVICE OR EQUIPMENT WHERE THE POWER ORIGINATES. THE LABEL SHALL BE PERMANENTLY MARKED OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT INVOLVED, AND NOT HANDWRITTEN.

1. NOT USED.
2. PRIOR TO CLOSING A SWITCH, THE OTHER SWITCH MUST BE OPENED USING KIRK KEY INTERLOCK TO PREVENT CONNECTION OF MULTIPLE SOURCES. REFER TO SEQUENCE OF OPERATIONS BY MANUFACTURER IN EQUIPMENT SUBMITTAL.
3. NOT USED
4. SQUARE D/ SCHNEIDER ION 9000 WITH RS-485 COMMUNICATIONS.
5. ENGINEERED CABLE BUS ASSEMBLY, CONDUIT, OR CABLE TRAY TO BUS DUCT CABLE TAP BOX.

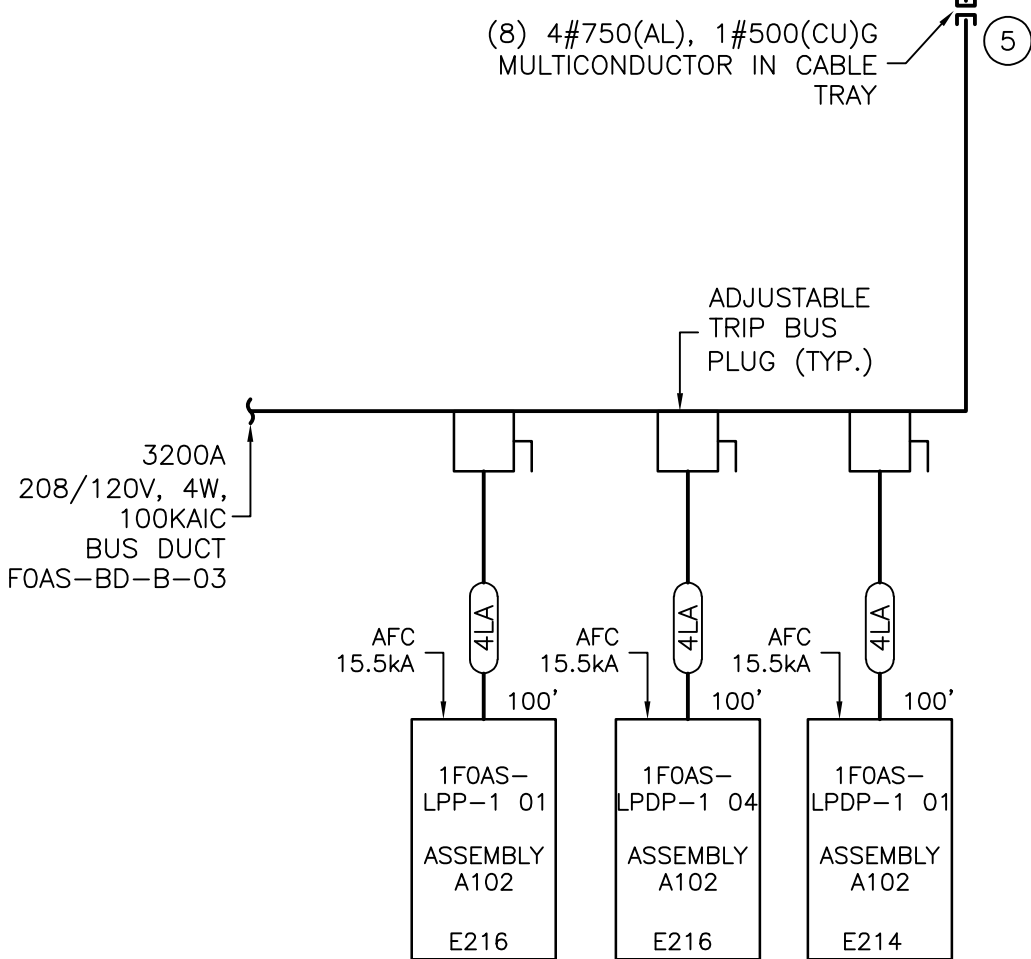

NO SCALE

NOTES: *800A AND ABOVE BUS PLUGS REQUIRE MANUFACTURER INSTALLED BUS PLATE. SEE POWER PLAN FOR LOCATION	TOTAL LOAD (KVA)	2594	1085	TOTAL DEMAND LOAD (KVA)
			3011.2 DEMAND AMPS 3200 RATING (A) 94 % LOADING	

Page 10

INCOMING	INCOMING	TRANSITION	TRANSFORMER	TRANSITION	MAIN CIRCUIT BREAKER	ACB	ACB
							ACB
							SPACE
							SPACE

NO SCALE

NO SCALING