
# CPSC332 File Structures & Databases Systems

Brandon Nguyen (8942) Tung Nguyen (5034)



### **Relational Model**

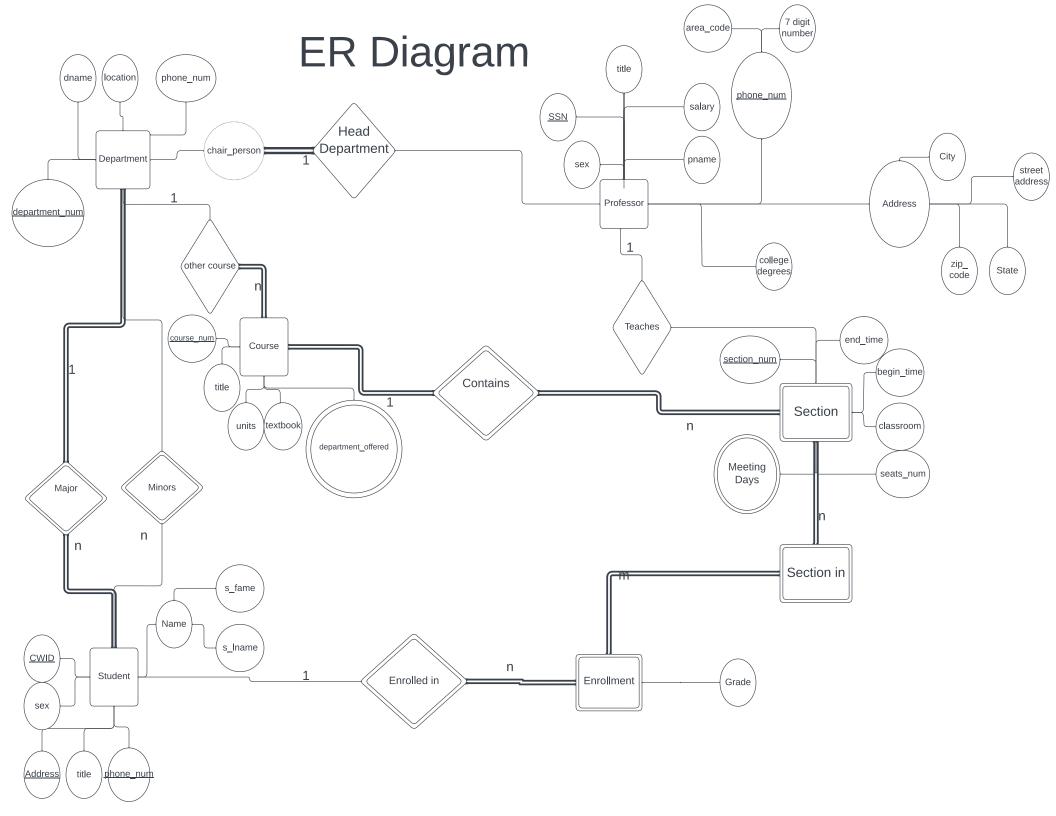

# Source Code (SQL)

### table.sql

#The default database is named: cs332g20

```
CREATE TABLE professors(
      ssn INT NOT NULL,
  pname VARCHAR(255),
  street_address VARCHAR(255),
  city VARCHAR(255),
  state VARCHAR(255),
  zip_code INT,
  area_code INT,
  phone_num VARCHAR(255),
  sex VARCHAR(255),
  title VARCHAR(255),
  salary INT,
  college_degrees VARCHAR(255),
  PRIMARY KEY(ssn)
);
CREATE TABLE departments(
      department_num INT NOT NULL,
  dname VARCHAR(255),
  phone num VARCHAR(255),
  location VARCHAR(255),
  chair person INT,
  FOREIGN KEY(chair_person) REFERENCES professors(ssn),
  PRIMARY KEY(department_num)
);
CREATE TABLE courses(
      course_num INT NOT NULL,
  title VARCHAR(255),
  textbook VARCHAR(255),
  units INT.
  department_offered INT,
```

```
FOREIGN KEY(department_offered) REFERENCES departments(department_num),
  PRIMARY KEY(course num)
);
CREATE TABLE sections(
  section_num INT NOT NULL,
  classroom VARCHAR(255),
  seats_num INT,
  meeting_days VARCHAR(255),
  begin_time VARCHAR(255),
  end_time VARCHAR(255),
  course INT,
  p_ssn INT,
  PRIMARY KEY(section_num),
      FOREIGN KEY (p_ssn) REFERENCES professors(ssn),
      FOREIGN KEY (course) REFERENCES courses(course_num)
);
CREATE TABLE students(
      cwid INT NOT NULL,
  s fname VARCHAR(255),
  s_lname VARCHAR(255),
  address VARCHAR(255),
  phone_num VARCHAR(255),
  major VARCHAR(255),
  minors VARCHAR(255),
  PRIMARY KEY(cwid)
);
CREATE TABLE enrollments(
      student_id INT NOT NULL,
  course_section INT NOT NULL,
  grade VARCHAR(255),
  FOREIGN KEY(student_id) REFERENCES students(cwid),
  FOREIGN KEY(course_section) REFERENCES sections(section_num)
);
```

# Source Code (SQL) continued... drop.sql

#This script will drop all tables associated with the default database: c332g20

```
SET FOREIGN_KEY_CHECKS = 0;
SET @tables = NULL;
SET GROUP_CONCAT_MAX_LEN=32767;

SELECT GROUP_CONCAT(`\', TABLE_SCHEMA, `\.`\', TABLE_NAME, `\') INTO @tables
FROM information_schema.TABLES
WHERE TABLE_SCHEMA = (SELECT DATABASE());
SELECT IFNULL(@tables, ") INTO @tables;

SET @tables = CONCAT('DROP TABLE IF EXISTS', @tables);
PREPARE stmt FROM @tables;
EXECUTE stmt;
DEALLOCATE PREPARE stmt;
SET FOREIGN_KEY_CHECKS = 1;
SET @tables = NULL;
```

# Source Code (SQL) continued... data.sql

#INSERT some data that includes at least 8 students, 2 departments, 3 professors, 4 courses, 6 sections, and 20 enrollments.

-- Path: homepage\sql\data.sql

INSERT INTO professors(ssn, pname, street\_address, city, state, zip\_code, area\_code, phone\_num, sex, title, salary, college\_degrees) VALUES

(123456789, 'John Smith', '1234 Main St', 'Fullerton', 'California', 12345, 123, '4567890', 'M', 'Professor', 100000, 'PhD'),

(234567890, 'Jane Doe', '2345 Main St', 'Westminster', 'California', 23456, 234, '5678901', 'F', 'Professor', 120000, 'PhD'),

(345678901, 'John Doe', '3456 Main St', 'Santa Ana', 'California', 34567, 345, '6789012', 'M', 'Professor', 210000, 'PhD');

INSERT INTO departments(department\_num, dname, phone\_num, location, chair\_person) VALUES

- (1, 'Computer Science', '1234567890', '1234 Main St', 123456789),
- (2, 'Mathematics', '2345678901', '2345 Main St', 234567890);

INSERT INTO courses(course\_num, title, textbook, units, department\_offered) VALUES

- (1, 'Intro to Computer Science', 'Intro to Computer Science', 4, 1),
- (2, 'Advanced Computer Science', 'Advanced Computer Science', 4, 1),
- (3, 'Intro to Mathematics', 'Intro to Mathematics', 4, 2),
- (4, 'Advanced Mathematics', 'Advanced Mathematics', 4, 2);

INSERT INTO sections(section\_num, classroom, seats\_num, meeting\_days, begin\_time, end\_time, course, p\_ssn) VALUES

- (1, '167B', 35, 'MWF', '9:00am', '10:00am', 1, 123456789),
- (2, '367A', 42, 'MW', '10:00am', '11:00am', 1, 123456789),
- (3, '376C', 36, 'TTh', '11:00am', '12:00pm', 2, 234567890),
- (4, '326A', 22, 'Fri', '12:00pm', '1:00pm', 2, 234567890),
- (5, '124D', 34, 'Sat', '1:00pm', '2:00pm', 3, 345678901),
- (6, '531F', 37, 'MWF', '2:00pm', '3:00pm', 4, 345678901);

INSERT INTO students(cwid, s fname, s lname, address, phone num, major, minors) VALUES

- (1, 'John', 'Smith', '1234 Main St', '1234567890', 'Mathematics', 'Computer Science'),
- (2, 'Jane', 'Doe', '2345 Main St', '2345678901', 'Computer Science', "),
- (3, 'John', 'Doe', '3456 Main St', '3456789012', 'Mathematics', "),
- (4, 'Jane', 'Smith', '4567 Main St', '4567890123', 'Computer Science', 'Physics'),
- (5, 'John', 'Doe', '5678 Main St', '5678901234', 'Mathematics', "),
- (6, 'Jane', 'Doe', '6789 Main St', '6789012345', 'Computer Science', 'Electrical Engineering, Biology'),
- (7, 'John', 'Smith', '7890 Main St', '7890123456', 'Mathematics', "),
- (8, 'Jane', 'Doe', '8901 Main St', '8901234567', 'Computer Science', 'Electrical Engineering');

#### INSERT INTO enrollments(student\_id, course\_section, grade) VALUES

- (1, 3, 'A+'),
- (1, 6, 'B-'),
- (1, 5, 'C'),
- (2, 1, 'D-'),
- (2, 3, 'F'),
- (2, 5, 'A'),
- (3, 2, 'B'),
- (3, 5, 'C+'),
- (3, 6, 'D+'),
- (4, 4, 'F'),
- (4, 3, 'A'),
- (4, 1, 'B-'),
- (5, 5, 'C'),
- (5, 3, 'D-'),
- (5, 6, 'F'),
- (6, 2, 'A'),
- (6, 3, 'B+'),
- (6, 5, 'C'),
- (7, 6, 'D-'),
- (7, 3, 'F'),
- (7, 2, 'A+'),
- (8, 4, 'B'),
- (8, 5, 'C-'),
- (8, 6, 'F');

### Source Code (DB)

#This script will drop old databases/tables and re-create them in the appropriate order #This script requires an option file to be set (see README), for provision of password (not over command line)

```
# For logging:
timestamp() {
 date +"%T"
}
# Constants------
#SQL script dir
location="/home/titan0/cs332g/cs332g20/homepage/sql"
# Ordered Array:
scripts=("$location/drop.sql"
"$location/tables.sql"
"$location/data.sql")
# Default database:
schema="cs332g20"
echo "Now running SQL scripts"
for val in ${scripts[@]}; do
 timestamp >> log.txt
 echo " Running $val" >> log.txt
 sshpass -f'./password' ssh cs332g20@shell.ecs.fullerton.edu "mysql -h mariadb $schema <
$val" >> log.txt
done
timestamp >> log.txt
echo -e " Sequence completed! \n-----\n" >> log.txt
echo "" >> log.txt
echo "Sequence completed! Check log.txt for details."
```

# Source Code (PHP & HTML)

```
41 lines (39 sloc)
                     1.55 KB
      <!DOCTYPE html>
      <html lang="en">
        <!-- Add styles css to html -->
          <meta charset="UTF-8">
          <meta name="viewport" content="width=device-width, initial-scale=1.0">
          <title>CPSC 332 Project</title>
          <link rel="stylesheet" href="css/styles.css">
        </head>
        <body>
                <!-- Inputs needed for Professors -->
                <h2 text="#ffffff">
                  Professor Portal
                </h2>
                   <form action="php files/ssn prof request.php">
                    <input type="text" id="ssn" name="ssn" placeholder="Social Security" required><br>
                    <input type="submit" value="Query">
                  </form>
                  <br>
                  <form action="php_files/cn_sn_prof_request.php">
                    <input type="text" id="cnum" name="cnum" placeholder="Course Number" required><br>
                    <input type="text" id="snum" name="snum" placeholder="Section Number" required><br>
                     <input type="submit" value="Query">
                   </form>
                <!-- Inputs needed for Students -->
                <h2 id="student-portal" text="#ffffff">
                  Student Portal
                <form action="php_files/cnum_student_request.php">
                  <input type="text" id="cnum" name="cnum" placeholder="Course Number" required><br>
                  <input type="submit" value="Query">
                </form>
                <br>
                <form action="php_files/cwid_student_request.php">
                  <input type="text" id="cwid" name="cwid" placeholder="CWID" required><br>
                   <input type="submit" value="Query">
                </form>
        </body>
      </html>
```

```
47 lines (47 sloc) | 1.84 KB
                                                                                                                                          Raw
     <html>
          <body>
             Your requested information for Course Number and Section Number: <?php echo $_GET["cnum"]; ?>, <?php echo $_GET["snum"]; ?>
             <?php
                $link = mysqli_connect('mariadb', 'cs332g20', '8CTKTqTV', 'cs332g20');
                 if (!$link) {
                     echo "Failed to connect to MySQL: " . $mysqli -> connect_error;
                 // Given a course number and a section number, count how many students get each distinct grade, 'A+', 'B' for each course.
                 $query = "SELECT grade, COUNT(grade) AS grade_count FROM enrollments WHERE course_section = " . $_GET["snum"] . " GROUP BY grade;";
                 $result = mysqli_query($link, $query);
                 if (!$result) {
                    echo "Failed to run query: " . $mysqli -> error;
                echo "Course Number: " . $_GET["cnum"] . "<br>";
                 echo "Section Number: " . $_GET["snum"] . "<br>";
                 echo "Grade Count for each grade: <br>";
                 echo "------(br>";
                 $grades = array(
                     'A' => 0,
                     'B-' => 0,
                     'C' => 0,
                    'D-' => 0,
                 // Display every possible letter grade and the number of students who got that grade
                 while ($row = mysqli_fetch_assoc($result)) {
                     $grades[$row["grade"]] = $row["grade_count"];
                 foreach ($grades as $key => $value) {
                     echo $key . ": " . $value . "<br>";
 47 </html>
```

```
51 lines (48 sloc) | 2.34 KB
     <html>
          <body>
              Your requested information for Course Number: <?php echo $_GET["cnum"]; ?>
              chry
              <br>
              <?php
                 $link = mysqli_connect('mariadb', 'cs332g20', '8CTKTqTV', 'cs332g20');
                  if (!$link) {
                     echo "Failed to connect to MySQL: " . $mysqli -> connect_error;
                 // Given the course number list the sections of the course, including the classrooms, the
                 $query = "SELECT DISTINCT section_num, classroom, meeting_days, begin_time, end_time
                           FROM sections NATURAL JOIN enrollments
                           WHERE course = " . $_GET["cnum"] . "
                           GROUP BY section_num, classroom, begin_time, end_time, meeting_days
                           ORDER BY section_num;";
                 $result = mysqli_query($link, $query);
                 if (!$result) {
                     echo "Failed to run query: " . $mysqli -> error;
                      exit();
                 echo "Course Number: " . $_GET["cnum"] . "<br>";
                 while ($row = mysqli_fetch_assoc($result)) {
                      echo "-----(br>";
                      echo "Section Number: " . $row["section_num"] . "<br>";
                     // Get the number of students enrolled in the section
                      $query2 = "SELECT COUNT(student_id) AS enrolled_students
                                FROM enrollments
                                WHERE course_section = " . $row["section_num"] . ";";
                      $result2 = mysqli_query($link, $query2);
                      if (!$result2) {
                         echo "Failed to run query that grabs student count: " . $mysqli -> error;
                         exit();
                     $row2 = mysqli_fetch_assoc($result2);
                     echo "Classroom: " . $row["classroom"] . "<br>";
                      echo "Meeting Days: " . $row["meeting_days"] . "<br>";
                      echo "Meeting Time: " . $row["begin_time"] . " - " . $row["end_time"] . "<br>";
                      echo "Enrolled Students: " . $row2["enrolled_students"] . "<br>";
                      echo "kbr>";
                      mysqli free result($result2);
                 mysqli_free_result($result);
                 $link->close();
          </body>
     </html>
```

```
35 lines (34 sloc)
                    1.54 KB
      <html>
              Your requested information for Social Security Number: <?php echo $_GET["ssn"]; ?>
              <br>
              <?php
                  $link = mysqli_connect('mariadb', 'cs332g20', '8CTKTqTV', 'cs332g20');
                  if (!$link) {
                      echo "Failed to connect to MySQL: " . $mysqli -> connect_error;
                  // Given the ssn of a professor, list the titles, classrooms, meeting days and time of his/her
                  $query = "SELECT courses.title, classroom, meeting_days, begin_time, end_time
                             FROM (professors JOIN sections ON ssn = p_ssn) JOIN courses ON course_num = course
                             WHERE ssn = " . $_GET["ssn"] . ";";
                  $result = mysqli_query($link, $query);
                  if (!$result) {
                      echo "Failed to run query: " . $mysqli -> error;
                      exit();
                  echo "---Professor with SSN: " . $_GET["ssn"] . "'s Classes---<br>";
                  while ($row = mysqli_fetch_assoc($result)) {
                      echo "-----<br>";
                     echo "Course: " . $row["title"] . "<br>";
                     echo "Classroom: " . $row["classroom"] . "<br>";
                      echo "Meeting Days: " . $row["meeting_days"] . "<br>";
                     echo "Meeting Time: " . $row["begin_time"] . " - " . $row["end_time"] . "<br>";
                      echo "<br>";
                  mysqli_free_result($result);
                  $link->close();
          </body>
 35 </html>
```

```
CSS changes:
body {
  background: black;
  background-size: cover;
  color: white;
  text-align: center;
```

```
33 lines (33 sloc) | 1.4 KB
                                                                                                                                           Raw Blame
  1 <html>
         <body>
             Your requested information for CWID: <?php echo $_GET["cwid"]; ?>
             <?php
                $link = mysqli_connect('mariadb', 'cs332g20', '8CTKTqTV', 'cs332g20');
                if (!$link) {
                 echo "Failed to connect to MySQL: " . $mysqli -> connect_error;
                    exit();
                $query = "SELECT course, grade, title FROM (enrollments JOIN sections ON course_section = section_num) JOIN courses ON course = course_num
                           WHERE student_id = " . $_GET["cwid"] . ";";
                 $result = mysqli_query($link, $query);
                 if (!$result) {
                   echo "Failed to run query: " . $mysqli -> error;
                 echo "CWID: " . $_GET["cwid"] . "<br>";
                 while ($row = mysqli_fetch_assoc($result)) {
                                                              -----<br>";
                    echo "Course Number: " . $row["course"] . "<br>";
                    echo "Course: " . $row["title"] . "<br>";
                    echo "Grade: " . $row["grade"] . "<br>";
                     echo "<br>";
                 mysqli_free_result($result);
                 $link->close();
         </body>
 33 </html>
```

#### Website Photos

