

DM74LS299

8-Input Universal Shift/Storage Register with Common Parallel I/O Pins

General Description


The 'LS299 is an 8-bit universal shift/storage register with 3-STATE outputs. Four modes of operation are possible: hold (store), shift left, shift right and load data. The parallel load inputs and flip-flop outputs are multiplexed to reduce the total number of package pins. Separate outputs are provided for flip-flops Q0 and Q7 to allow easy cascading. A separate active LOW Master Reset is used to reset the register

Features

- Common I/O for reduced pin count
- Four operation modes: shift left, shift right, load and store
- Separate shift right serial input and shift left serial input for easy cascading
- 3-STATE outputs for bus oriented applications

Connection Diagram

Dual-In-Line Package



Order Number DM54LS299E, DM54LS299J, DM54LS299W, DM74LS299WM or DM74LS299N See Package Number E20A, J20A, M20B, N20A or W20A

Pin	Description
Names	
CP	Clock Pulse Input (Active Rising Edge)
D_{SO}	Serial Data Input for Right Shift
D _{S7}	Serial Data Input for Left Shift
S0, S1	Mode Select Inputs
MR	Asynchronous Master Reset Input (Active LOW)
OE1, OE2	3-STATE Output Enable Inputs (Active LOW)
I/O0–I/O7	Parallel Data Inputs or 3-STATE Parallel Outputs
Q0-Q7	Serial Outputs

Absolute Maximum Ratings (Note 1)

DM54 DM74L

7V

7V

DM74LS Storage Temperature Range -55°C to +125°C 0°C to +70°C -65°C to +150°C

Input Voltage
Operating Free Air Temperature Range

Supply Voltage

Recommended Operating Conditions

Symbol	Parameter		DM54LS299			DM74LS299			Units
			Min	Nom	Max	Min	Nom	Max	1
V _{CC}	Supply Voltage		4.5	5	5.5	4.75	5	5.25	V
V _{IH}	High Level Input Voltage		2			2			٧
V _{IL}	Low Level Input Voltage				0.7			0.8	٧
I _{OH}	High Level Output Current	Q0, Q7			-0.4			-0.4	mA
		I/O0-I/O7			-2.6			-2.6	mA
loL	Low Level Output Current	Q0, Q7			4			8	mA
		I/O0-I/O7			12			24	mA
T _A	Free Air Operating Temperature		-55		125	0		70	°C
t _s (H)	Setup Time HIGH or LOW		24			24			ns
t _s (L)	S0 or S1 to CP		24			24			
t _h (H)	Hold Time HIGH or LOW		5			0			ns
$t_h(L)$	S0 or S1 to CP		5			0			
t _s (H)	Setup Time HIGH or LOW		15			10			ns
t _s (L)	I/O _n , D _{so} , D _{s7} to CP		15			10			
t _h (H)	Hold Time HIGH or LOW		5			0			ns
$t_h(L)$	I/O _n , D _{so} , D _{s7} to CP		5			0			
t _w (H)	CP Pulse Width HIGH or LOW		15			15			ns
$t_w(L)$			15			15			
t _w (L)	MR Pulse Width LOW	15			15			ns	
t _{rec}	Recovery Time		10			10			ns
	MR to CP								

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Electrical Characteristics

Over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions		Min	Тур	Max	Units	
						(Note 2)		
V _I	Input Clamp Voltage	V_{CC} = Min, I_I = -18 mA					-1.5	V
V _{OH}	High Level Output	V _{CC} = Min, I _{OH} = Max		DM54	2.5			
	Voltage	V _{IL} = Max	Q0, Q7	DM74	2.7	3.4		V
			1/00-1/07	1	2.4			
V _{OL}	Low Level Output	V _{CC} = Min, I _{OL} = Max		DM54			0.4	
	Voltage	V _{IH} = Min		DM74		0.35	0.5	V
		I _{OL} = 4 mA, V _{CC} = Min		DM74		0.25	0.4	
T _l	Input Current @ Max	V _{CC} = Max, V _I = 10V (C	M54)	Inputs			0.1	mA
	Input Voltage	$V_1 = 7V (DM74)$		Sn			0.2	mA
I _{IH}	High Level Input Current	$V_{CC} = Max, V_I = 2.7V$		Sn			40	μA
				Inputs			20	μΑ
IIL	Low Level Input Current	V _{CC} = Max, V _I = 0.4V		Sn			-0.8	mA
				Inputs			-0.4	mA

Electrical Characteristics (Continued)

Over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions		Min	Тур	Max	Units
					(Note 2)		
los	Short Circuit	V _{CC} = Max	Q ₀ , Q ₇	-20		-100	mA
	Output Current	(Note 3)	I/O ₀ -I/O ₇	-30		-130	
Icc	Supply Current	V _{CC} = Max, OE = 4.5V				60	mA
I _{ozh}	3-STATE Output Off	V _{CC} = Max				40	μΑ
	Current High	V _O = 2.7V					
l _{ozL}	3-STATE Output Off	V _{CC} = Max				-400	μΑ
	Current Low	$V_O = 0.4V$					


Note 2: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 3: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Switching Characteristics $V_{CC} = +5.0V$, $T_A = +25^{\circ}C$ (See Section 1 for waveforms and load configurations)

Symbol	Parameter	R _L =	Units		
		Min	Max	1	
f _{max}	Maximum Input Frequency	35		MHz	
t _{PLH}	Propagation Delay		26	ns	
t _{PHL}	CP to Q0 or Q7		28		
t _{PLH}	Propagation Delay		25	ns	
t _{PHL}	CP to I/O _n		35		
t _{PHL}	Propagation Delay		28	ns	
	MR to Q0 or Q7				
t _{PHL}	Propagation Delay		35	ns	
	MR to I/O _n				
t _{PZH}	Output Enable Time		18	ns	
t _{PZL}			25		
t _{PHZ}	Output Disable Time		15	ns	
t _{PLZ}			20		

Logic Symbol

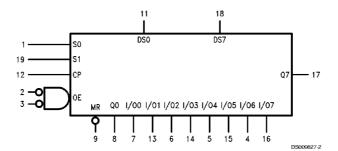

V_{CC} = Pin 20 GND = Pin 10

Functional Description

The 'LS299 contains eight edge-triggered D-type flip-flops and the interstage logic necessary to perform synchronous shift left, shift right, parallel load and hold operations. The type of operation is determined by the S0 and S1, as shown in the Mode Select Table. All flip-flop outputs are brought out through 3-STATE buffers to separate I/O pins that also serve as data inputs in the parallel load mode. Q0 and Q7 are also brought out on other pins for expansion in serial shifting of longer words.


A LOW signal on MR overrides the Select and CP inputs and resets the flip-flops. All other state changes are initiated by the rising edge of the clock. Inputs can change when the clock is in either state provided only that the recommended setup and hold times, relative to the rising edge of CP, are


A HIGH signal on either $\overline{\text{OE}}1$ or $\overline{\text{OE}}2$ disables the 3-STATE buffers and puts the I/O pins in the high impedance state. In this condition the shift, hold, load and reset operations can still occur. The 3-STATE buffers are also disabled by HIGH signals on both S0 and S1 in preparation for a parallel load operation.


Mode Select Table


	Inputs			Response
MR	S1	SO	СР	
L	Х	Х	Х	Asynchronous Reset; Q0-Q7 = LOW
Н	Н	Н	~	Parallel Load; I/O _n →Q _n
Н	L	Н		Shift Right; $D_{SO} \rightarrow Q0$, $Q0 \rightarrow Q1$, etc. Shift Left; $D_{S7} \rightarrow Q7$, $Q7 \rightarrow Q6$, etc.
Н	Н	L	_	Shift Left; D _{S7} →Q7, Q7→Q6, etc.
Н	L	L	Х	Hold

H = HIGH Voltage Level L = LOW Voltage Level

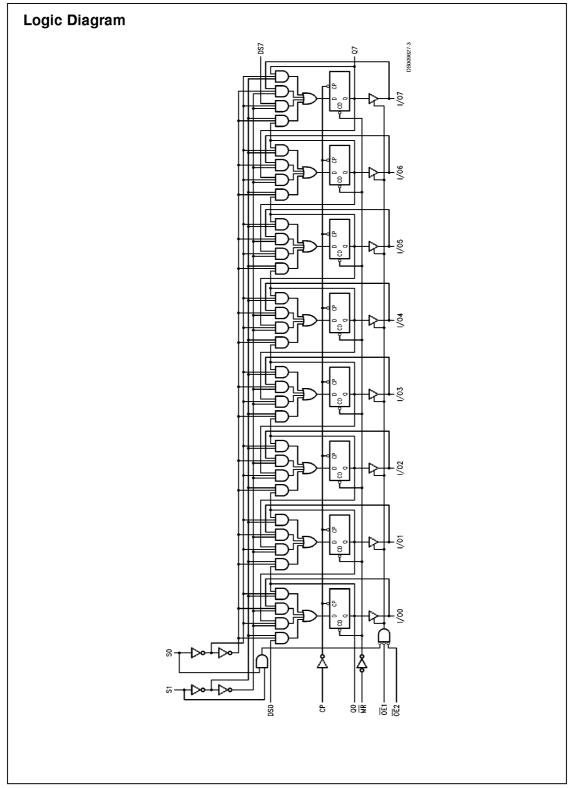


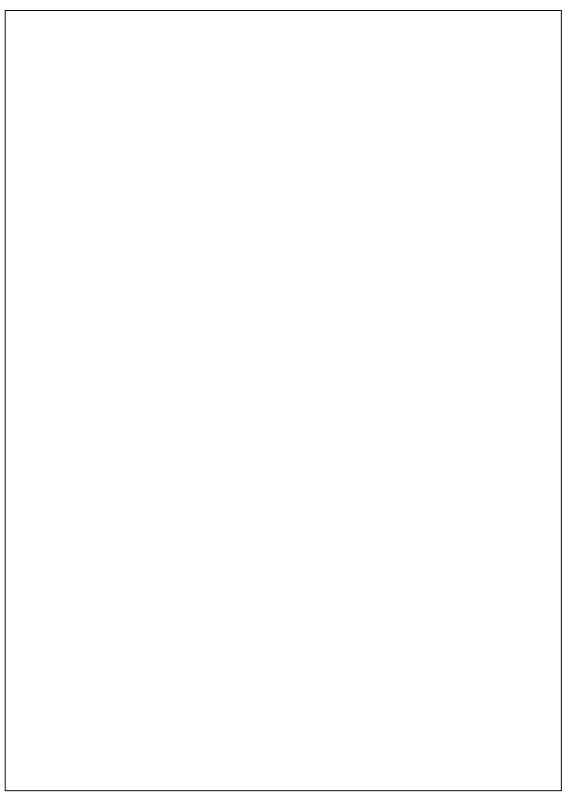

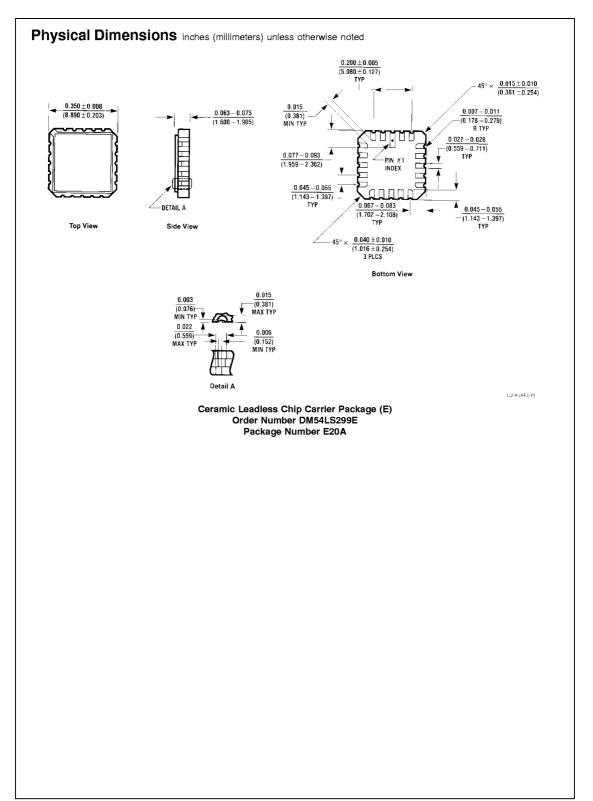


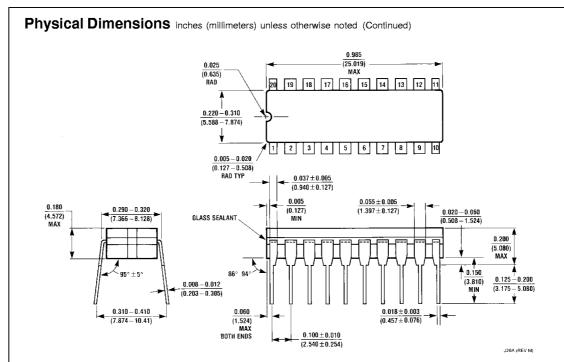

20-Lead Ceramic Dual-In-Line Package (J) Order Number DM54LS299J Package Number J20A

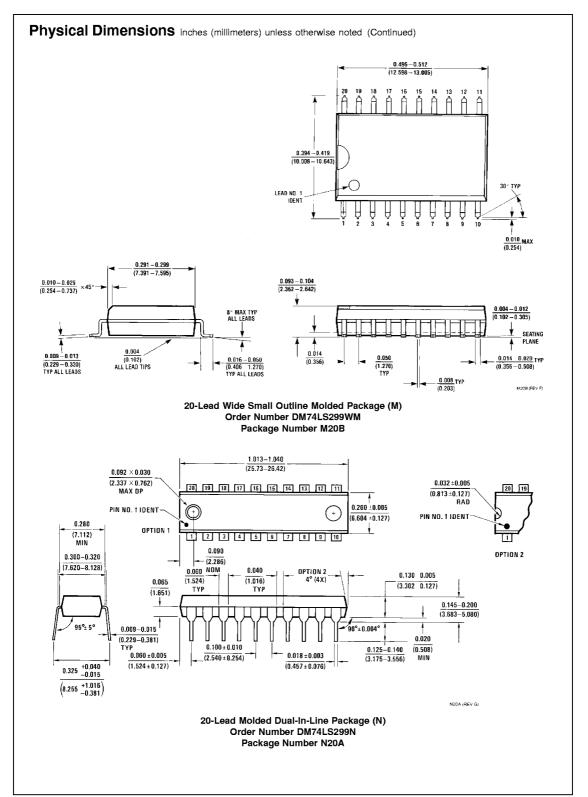

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

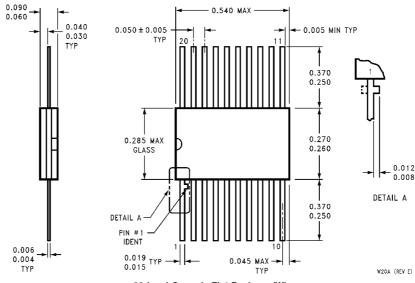

20-Lead Ceramic Flat Package (W) Order Number DM54LS299W Package Number W20A

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DE-VICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMI-CONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor Corporation Americas Customer Response Center

Tel: 1-888-522-5372

Fairchild Semiconductor

Fax: +49 (0) 1 80-530 85 86 Fax: +49 (0) 1 80-530 85 86

Email: europe.support@nsc.com

Deutsch Tel: +49 (0) 8 141-35-0

English Tel: +44 (0) 1 793-85-68-56

Italy Tel: +39 (0) 2 57 5631

Fairchild Semiconductor Hong Kong Ltd. 13th Floor, Straight Block, Ocean Centre, 5 Canton Rd.

Tsimshatsui, Kowloon Hong Kong Tel: +852 2737-7200 Fax: +852 2314-0061

National Semiconductor Japan Ltd. Tel: 81-3-5620-6175 Fax: 81-3-5620-6179