
W2L108 · left central sensory feedback

Half-centres and interneurons shown explicitly; one source neuron per sensory box

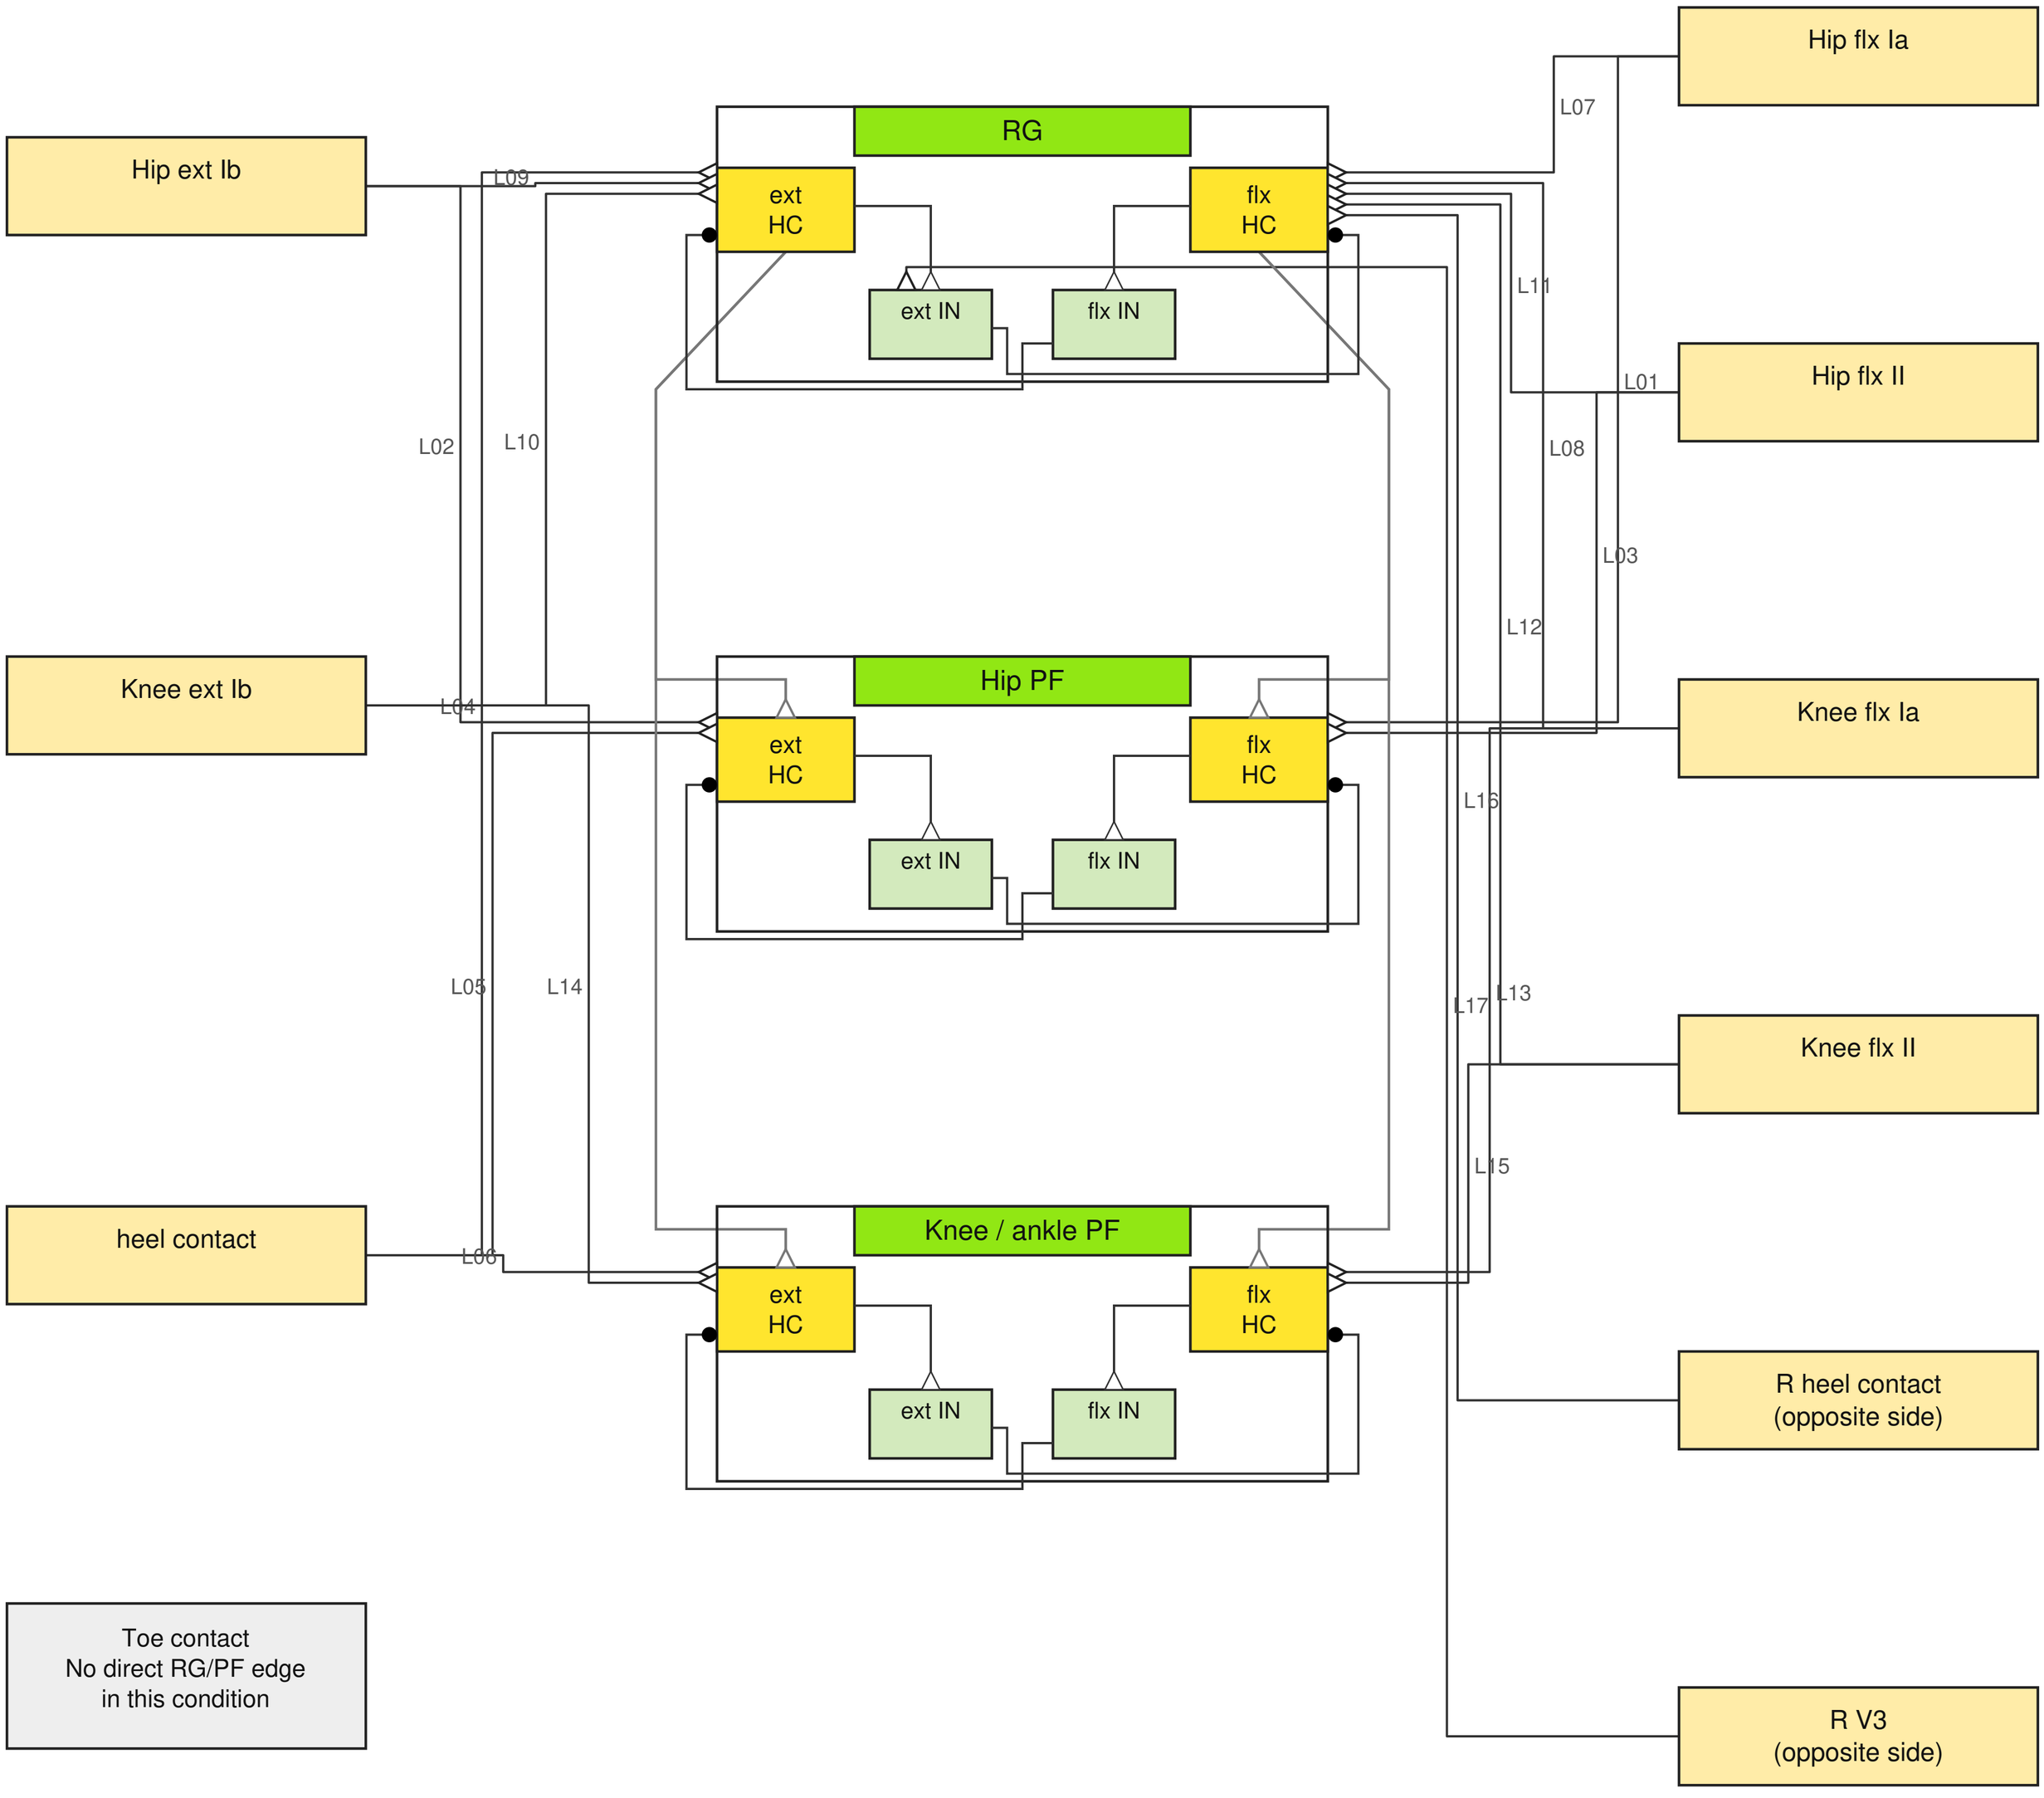

Triangle base meets its receiving object; triangle point lies on the incoming line.

Filled circle: inhibition at target rest. Crossings without dots are not junctions.

Ia / II / Ib sensory boxes each represent one source afferent neuron, not a muscle bundle.

All direct afferent targets here are HCs; opposite-side V3 targets the RG extensor IN.

Other homonymous II and toe routes belong to motor/reflex circuits, not this central panel.

W2L108 L · central feedback connection key


g: maximum conductance (uS); Erev, threshold, saturation: mV. Full IDs in CSV/SVG.

Key	Source → target	Named type	g	Erev	lo	hi
L01	L Hip flx Ia → L Hip PF flx	Ia_HipFlx_to_HipPFflx_Excite	0.01	-40	-60	-40
L02	L Hip ext Ib → L Hip PF ext	Ib_HipExt_to_HipPFext_Excite	0.01	-40	-60	-40
L03	L Hip flx II → L Hip PF flx	II_HipFlx_to_HipPFflx_Excite	0.01	-40	-60	-40
L04	L heel contact → L RG ext	Heel_Ipsi_RGext_Excite	0.01	-40	-60	-40
L05	L heel contact → L Hip PF ext	Heel_Ipsi_HipPFext_Excite	0.01	-40	-60	-40
L06	L heel contact → L Knee PF ext	Heel_Ipsi_KneePFext_Excite	0.01	-40	-60	-40
L07	L Hip flx Ia → L RG flx	Ia_HipFlx_to_RGflx_Excite	0.01	-40	-60	-40
L08	L Knee flx Ia → L RG flx	Ia_KneeFlx_to_RGflx_Excite	0.01	-40	-60	-40
L09	L Hip ext Ib → L RG ext	Ib_HipExt_to_RGext_Excite	0.01	-40	-60	-40
L10	L Knee ext Ib → L RG ext	Ib_KneeExt_to_RGext_Excite	0.01	-40	-60	-40
L11	L Hip flx II → L RG flx	II_HipFlx_to_RGflx_Excite	0.01	-40	-60	-40
L12	L Knee flx II → L RG flx	II_KneeFlx_to_RGflx_Excite	0.01	-40	-60	-40
L13	L Knee flx Ia → L Knee PF flx	Ia_KneeFlx_to_KneePFflx_Excite	0.01	-40	-60	-40
L14	L Knee ext Ib → L Knee PF ext	Ib_KneeExt_to_KneePFext_Excite	0.01	-40	-60	-40
L15	L Knee flx II → L Knee PF flx	II_KneeFlx_to_KneePFflx_Excite	0.01	-40	-60	-40
L16	R heel contact → L RG flx	Heel_Contra_RGflx_Excite	0.01	-40	-60	-40
L17	R V3 → L RG ext IN	V3 contralateral RG ext IN, weak positive	0.02749	-40	-60	-25

Source: W2L108 verified standalone; receptor conversion and MN wiring are separate layers.

W2L108 · right central sensory feedback

Half-centres and interneurons shown explicitly; one source neuron per sensory box

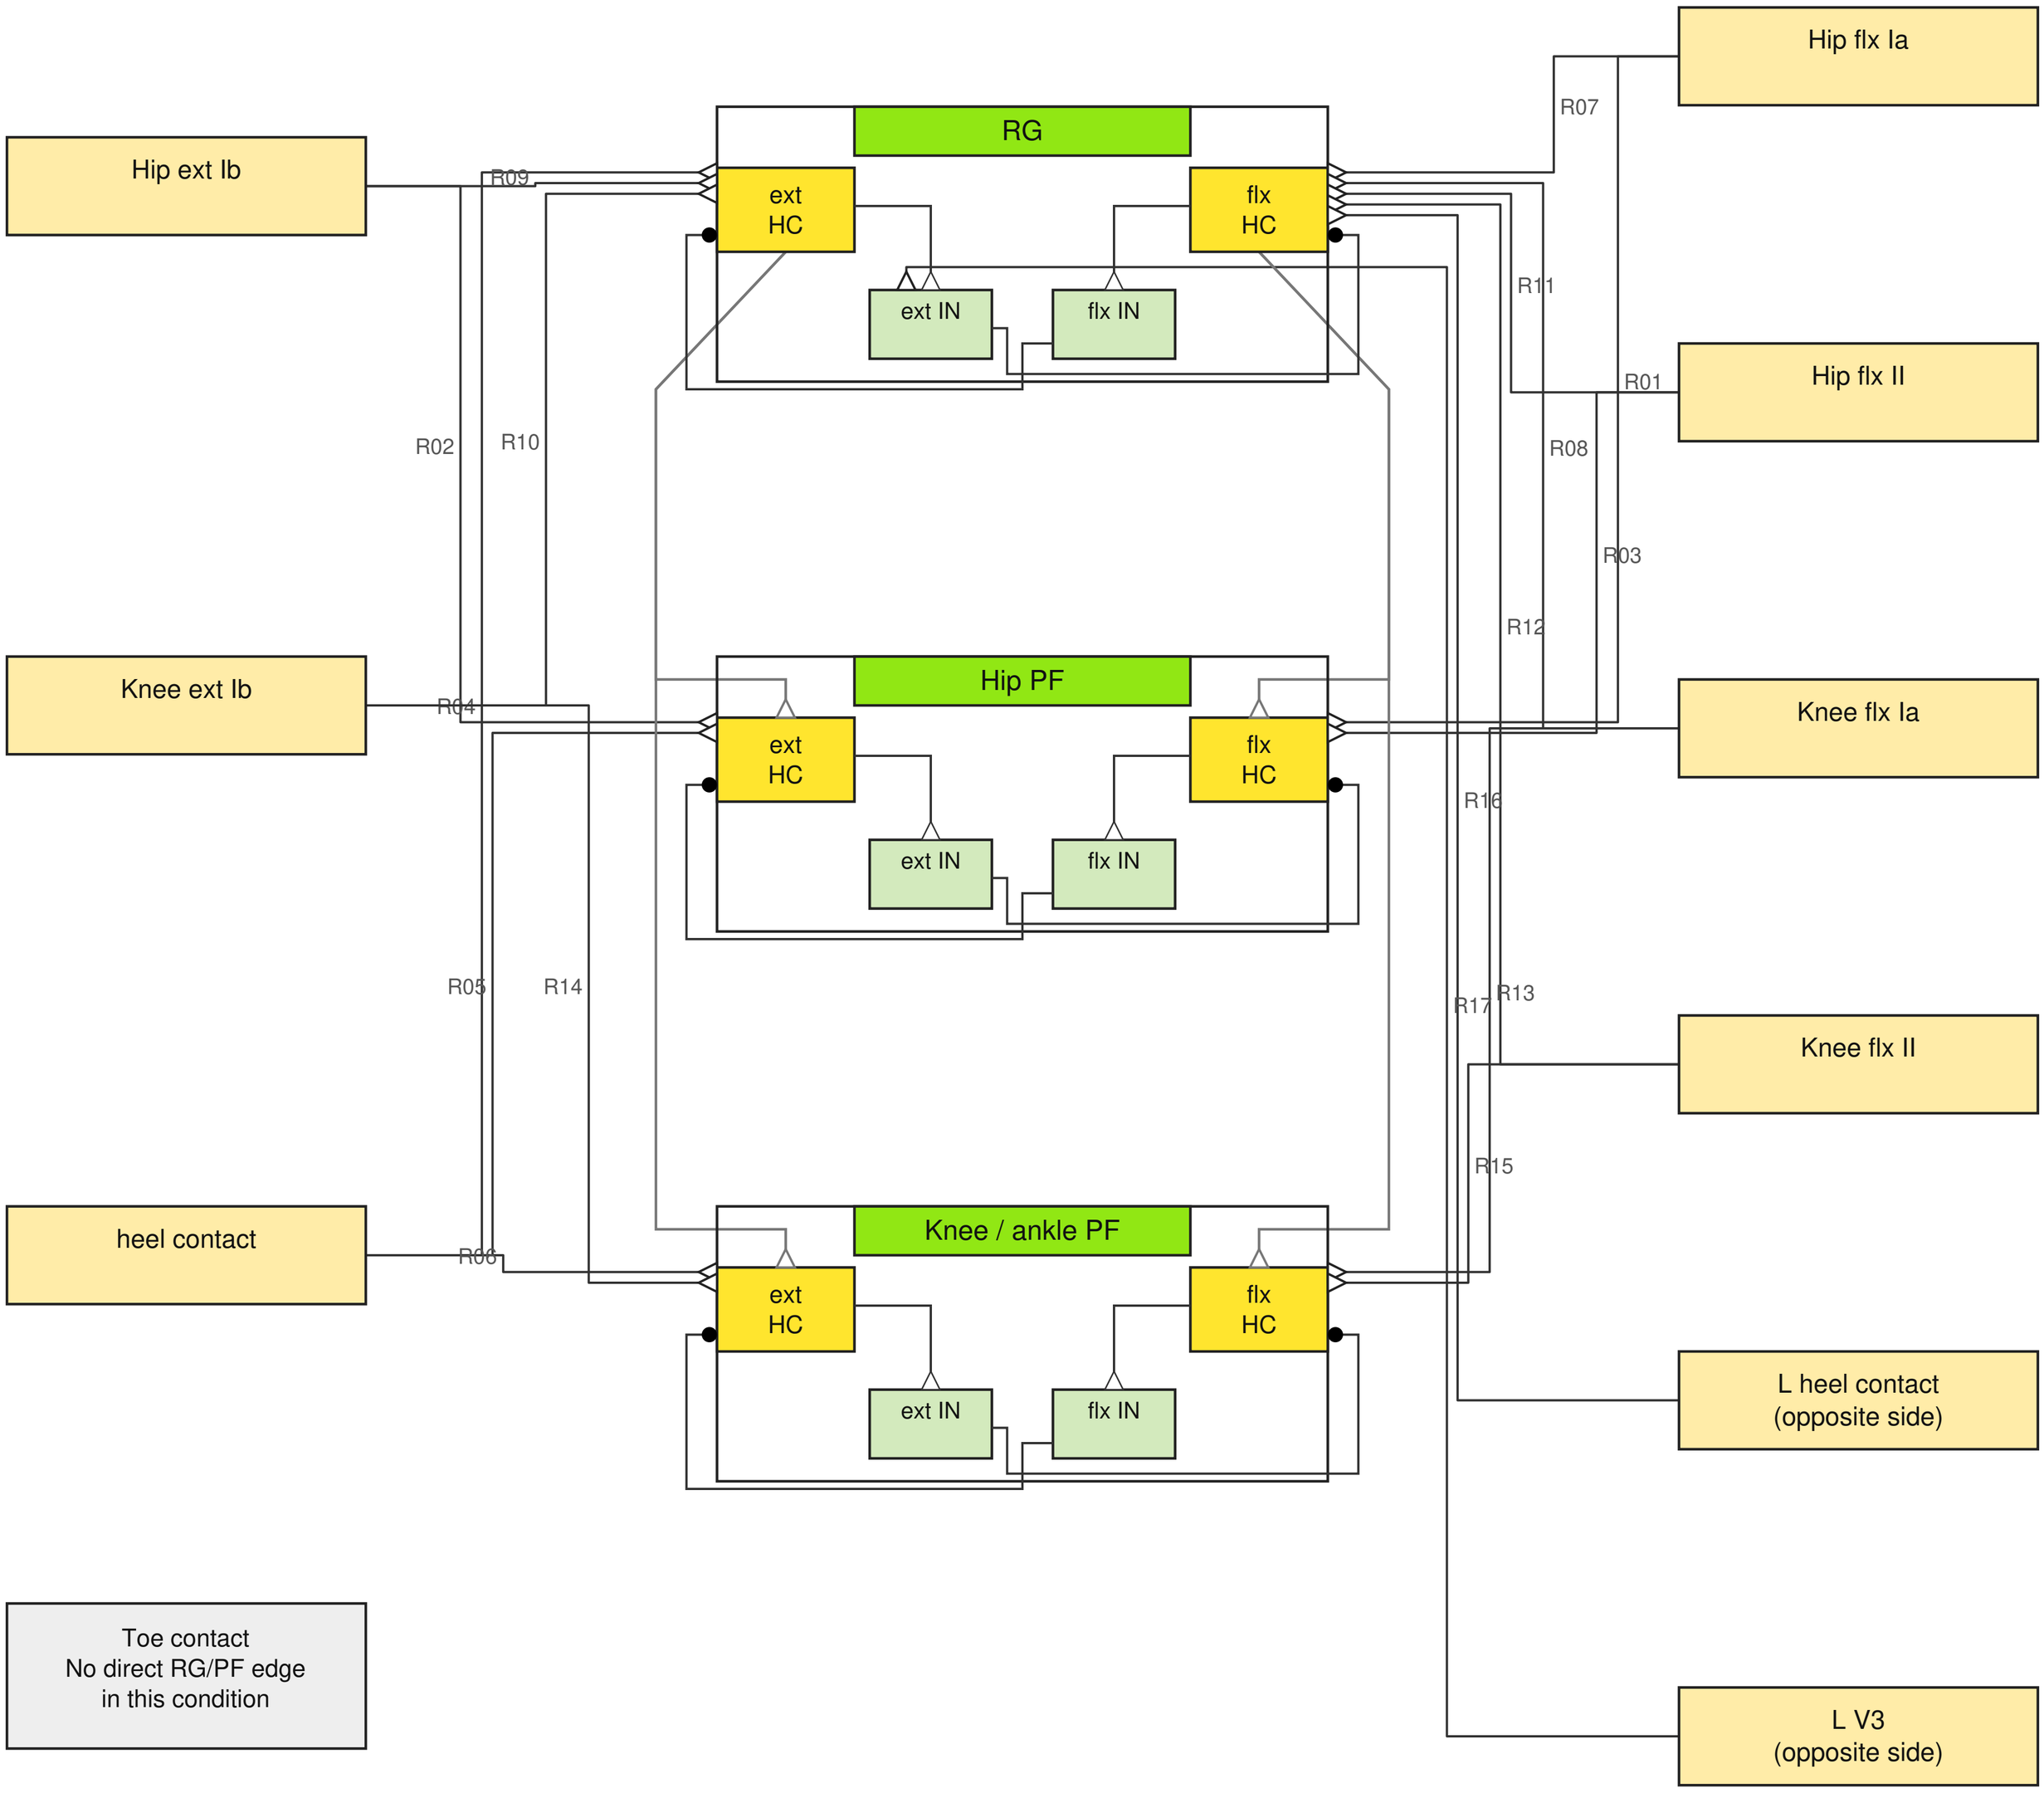

Triangle base meets its receiving object; triangle point lies on the incoming line.

Filled circle: inhibition at target rest. Crossings without dots are not junctions.

Ia / II / Ib sensory boxes each represent one source afferent neuron, not a muscle bundle.

All direct afferent targets here are HCs; opposite-side V3 targets the RG extensor IN.

Other homonymous II and toe routes belong to motor/reflex circuits, not this central panel.

W2L108 R · central feedback connection key

g: maximum conductance (uS); Erev, threshold, saturation: mV. Full IDs in CSV/SVG.

Key	Source → target	Named type	g	Erev	lo	hi
R01	R Hip flx Ia → R Hip PF flx	Ia_HipFlx_to_HipPFflx_Excite	0.01	-40	-60	-40
R02	R Hip ext Ib → R Hip PF ext	Ib_HipExt_to_HipPFext_Excite	0.01	-40	-60	-40
R03	R Hip flx II → R Hip PF flx	II_HipFlx_to_HipPFflx_Excite	0.01	-40	-60	-40
R04	R heel contact → R RG ext	Heel_Ipsi_RGext_Excite	0.01	-40	-60	-40
R05	R heel contact → R Hip PF ext	Heel_Ipsi_HipPFext_Excite	0.01	-40	-60	-40
R06	R heel contact → R Knee PF ext	Heel_Ipsi_KneePFext_Excite	0.01	-40	-60	-40
R07	R Hip flx Ia → R RG flx	Ia_HipFlx_to_RGflx_Excite	0.01	-40	-60	-40
R08	R Knee flx Ia → R RG flx	Ia_KneeFlx_to_RGflx_Excite	0.01	-40	-60	-40
R09	R Hip ext Ib → R RG ext	Ib_HipExt_to_RGext_Excite	0.01	-40	-60	-40
R10	R Knee ext Ib → R RG ext	Ib_KneeExt_to_RGext_Excite	0.01	-40	-60	-40
R11	R Hip flx II → R RG flx	II_HipFlx_to_RGflx_Excite	0.01	-40	-60	-40
R12	R Knee flx II → R RG flx	II_KneeFlx_to_RGflx_Excite	0.01	-40	-60	-40
R13	R Knee flx Ia → R Knee PF flx	Ia_KneeFlx_to_KneePFflx_Excite	0.01	-40	-60	-40
R14	R Knee ext Ib → R Knee PF ext	Ib_KneeExt_to_KneePFext_Excite	0.01	-40	-60	-40
R15	R Knee flx II → R Knee PF flx	II_KneeFlx_to_KneePFflx_Excite	0.01	-40	-60	-40
R16	L heel contact → R RG flx	Heel_Contra_RGflx_Excite	0.01	-40	-60	-40
R17	L V3 → R RG ext IN	V3 contralateral RG ext IN, weak positive	0.02749	-40	-60	-25

Source: W2L108 verified standalone; receptor conversion and MN wiring are separate layers.