

# Manual

## Security Check ZKS-PKT 8.2

Version 1.0.23049

Last changed on: 02.09.2020

## Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notice.

# Contents

|   |                                |   |
|---|--------------------------------|---|
| 1 | Security Check - Overview..... | 4 |
| 2 | Bag Check.....                 | 5 |

# 1 Security Check - Overview

## Purpose

This function package offers the possibility to define settings for the access control that trigger random security checks on employees who leave the factory premises.

## Implementation notes

You use the function package if:

- you use HYDRA access control system (ZKS) and want to specify which employees are to be checked on leaving the factory premises.

## Integration

This function package can only be used if the HYDRA access control product group is in use (function package *access control management functions*).

You must control the exits via the HYDRA access control system to use this function.

## Features


- Security check
  - Configuration of periods and frequency of security checks.
  - A signal indicates the security check to the employee and the security personnel; the exit can optionally be locked.
  - Exemptions for specific badges that are not subject to security checks (e.g. executives).

## 2 Bag Check

### Summary

|                        |                                          |
|------------------------|------------------------------------------|
| Menu                   | Master Data → Access Control → Bag Check |
| Transaction code       | back                                     |
| Function authorization | back                                     |

The “bag check” function allows for the access control function to decide which employees are to be checked when leaving the premises. The decision is made using a random generator where the probability can be specified. If a bag check is to be carried out the ZKS terminal triggers a contact that announces the bag check by an optical or acoustic signal.

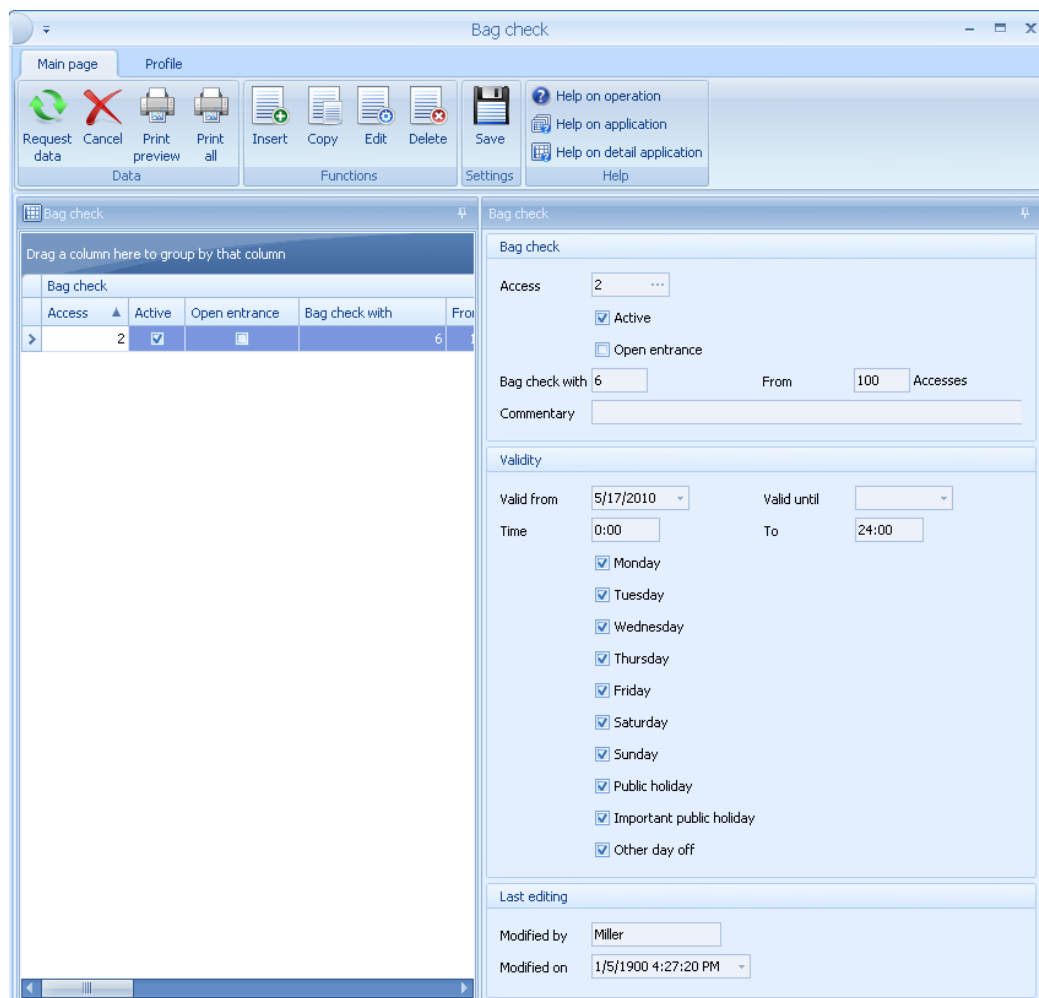

Bag check

Main page Profile

Request data Cancel Print preview Print all Insert Copy Edit Delete Save Help on operation Help on application Help on detail application Help

Bag check

Drag a column here to group by that column

| Access | Active                              | Open entrance            | Bag check with | From |
|--------|-------------------------------------|--------------------------|----------------|------|
| 2      | <input checked="" type="checkbox"/> | <input type="checkbox"/> | 6              | 6    |

Bag check

Access 2

☒ Active

☐ Open entrance

Bag check with 6 From 100 Accesses

Commentary

Validity

Valid from 5/17/2010 Valid until 24:00

Time 0:00 To 24:00

☒ Monday

☒ Tuesday

☒ Wednesday

☒ Thursday

☒ Friday

☒ Saturday

☒ Sunday

☒ Public holiday

☒ Important public holiday

☒ Other day off

Last editing

Modified by Miller

Modified on 1/5/1900 4:27:20 PM



The “bag check” function is only provided by terminals of the type CT-385.

## Field Descriptions

### Access

[Access](#) where a bag check is to be carried out.

### Active

This option enables or disables the currently displayed entry. Inactive configurations are not processed at entries.

### Open entrance

This option defines whether the entrance is to be opened or remains closed during a bag check. This depends, however, on whether the bag check takes place in front of or behind the access point.

### Bag check at ... out of ... access attempts

Number of checks that are to be performed for a specified number of access attempts. The above screenshot is configured so as to check six out of 100 access attempts on average, i.e. every 17<sup>th</sup> access is checked. The decision is made for each entry using a random generator with the probability that is configured here. Consequently, it might be the case that two bag checks are performed directly one after the other. But it may also be the case that there are far more than 17 access attempts between two checks.

### Comment

Comment on the configuration

### Valid from, valid until

Validity period for the bag check. The bag check function is not restricted if the validity end date is not filled out.

### Time, until

Period of time during which the bag check is performed.

### Monday, Tuesday, ..., Other day off

Weekdays when the bag check is performed. Three types of [public holidays](#) are supported in addition to weekdays.