

Manual

HYDRA@Web PZE Clocking WEB-PS 8.1

Version 1.0.23049

Last changed on: 02.09.2020

Copyright

©Copyright 2020 All rights reserved.

SAP® and R/3® are registered trademarks of SAP AG.

WINDOWS® is a registered trademark of Microsoft Corporation.

MPDV® and HYDRA® are registered trademarks of MPDV Mikrolab GmbH.

ORACLE® is a registered trademark of ORACLE Corporation, California, USA.

Copying and distribution of this documentation or any part thereof, for any purpose or in any form, is prohibited without prior written permission from MPDV Mikrolab GmbH.

The information contained in this documentation is subject to change without prior notice.

Contents

1	Overview: HYDRA@Web PZE Clocking.....	4
2	Time & Attendance in WEB.....	5
2.1	Perform clockings.....	6
2.2	Display of account balances.....	7
2.3	Show recent clocking records.....	8
2.4	Settings	9

1 Overview: HYDRA@Web PZE Clocking

Purpose

This function package provides the opportunity to perform Time & Attendance clockings in the intranet or internet.

Implementation notes

You use the function package if:

- employees of external sites are supposed to be integrated in Time & Attendance processes but no PZE (T&A) terminal is installed at this location
- employees in field service are supposed to perform their clockings via an internet compatible device.

Integration

This function package can only be used if Time & Attendance is performed in HYDRA (function package *Recording and maintenance of labor times*).

Features

- HYDRA@Web PZE clocking
 - PZE clockings via internet and/or intranet
 - Display of current account balances in internet and/or intranet
 - Display of clockings of the previous week

2 Time & Attendance in WEB

Summary

The following screen is shown to enter clockings in WEB:



The labeling and number of icons may be configured in MOC [terminal configuration](#). The relevant terminal number can be defined in the [settings](#) and is assigned to 254 by default.

2.1 Perform clockings

A clocking is performed by clicking one of the following icons:

Icon	Description
	Clock-in
	Clock-out
	Clocking out for break
	Absence clocking: An absence clocking generates a clock-in or clock-out (depending on the person's current status) including a reason for the delay or early leaving.
	Open a list of absences: The appropriate absence reason can be chosen from this list.

This dialog opens to perform a clocking:

< SMA

Time

08:45

Status

In

Cost center

Person

Staff badge no.

Pin code


OK

Cancel

In this dialog employees enter their personnel number or badge number and PIN code as defined in the [HR master](#) and click OK. The personnel number or badge number and PIN code may be defined in the [settings](#). Consequently, these data do not have to be entered every time a clocking is performed. It is also possible to configure there if the fields "person", "badge" and "PIN code" are visible at all or if they are generally taken from the [settings](#).


The field to select cost centers is only visible if it is enabled in the [settings](#).

Once the clocking has been performed, a success message is shown in the main screen:

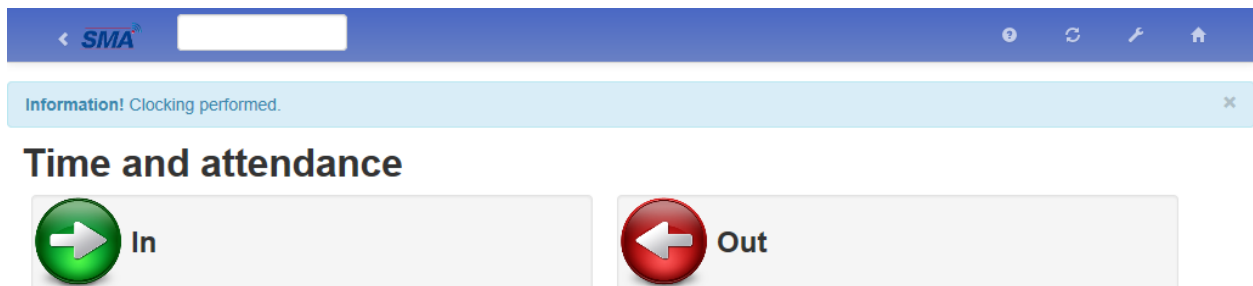

2.2 Display of account balances

Employees may view their current account balances by clicking the icon  :

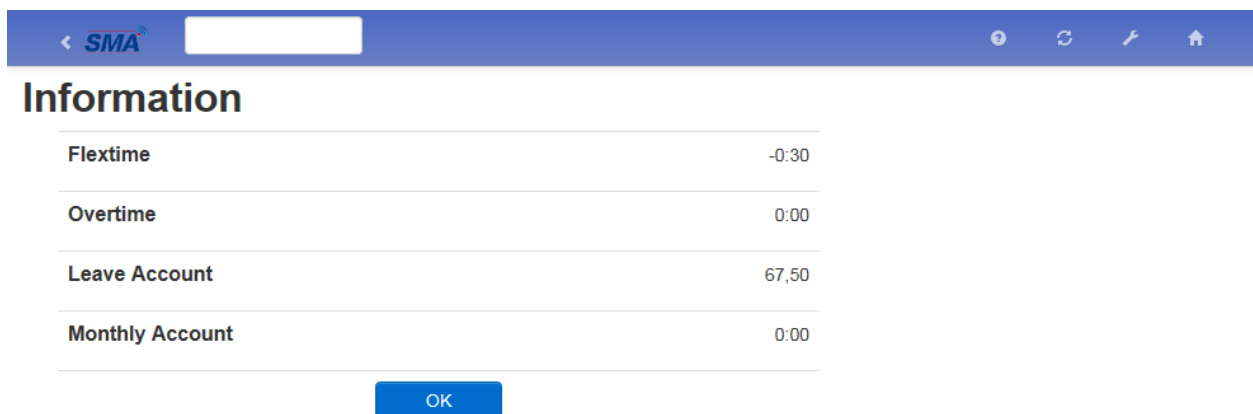

Subject to the [settings](#) made, a dialog where the personnel number or badge number and PIN code are to be entered might appear before account balances are shown.

2.3 Show recent clocking records



Employees may view their clockings of the previous week by clicking the icon :

< SMA

🔍 ↺ ↻ 🔧 🏠

Clockings

In	14.05.2014 - 08:46
Out	14.05.2014 - 08:50

OK



Subject to the [settings](#) made, a dialog where the personnel number or badge number and PIN code are to be entered might appear before account balances are shown.

2.4 Settings

The performance/behavior of the application can be configured in the "settings" tab when logging on to the application:

The screenshot shows the 'Log on' settings dialog box. The 'Settings' tab is selected. The 'System' field is set to 'win2008-11:8082'. The 'Terminal' field is set to '253'. The 'Company for cost center posting' field is empty. The 'Company for absence reason list' field is set to '0001'. The 'Show "person" field' and 'Show "badge" field' checkboxes are both checked. An 'OK' button is located at the bottom left of the dialog.

Field description

System

It can be configured here which HYDRA system the user logs on to. If only one system is implemented, this system will be assigned by default.

Show "person" field, show "badge" field

These two options define if the user logs in by indicating the personnel number or the badge number. If both options are disabled, the application does not show a login dialog but the person who is already logged in is used.

Terminal

Input of the terminal number the terminal configuration of which applies. The buttons and their labeling may be defined in [terminal configuration](#). This field is automatically assigned to 254. It is recommendable to use the terminal number 254, unless several different configurations are required.

Cost center posting

This option specifies if a cost center may be selected when a clocking is performed.

Company for cost center posting

The selection list of cost centers may be restricted to a specific company by an entry in this field.

Company for absence reason list

The selection list for absence reasons may be restricted to a specific company by an entry in this field.