ASSIGNMENT -3

Name: G. Sandra grace

Reg No:711620106323

Simulate this project on https://wokwi.com

https://wokwi.com/projects/364621732668632065

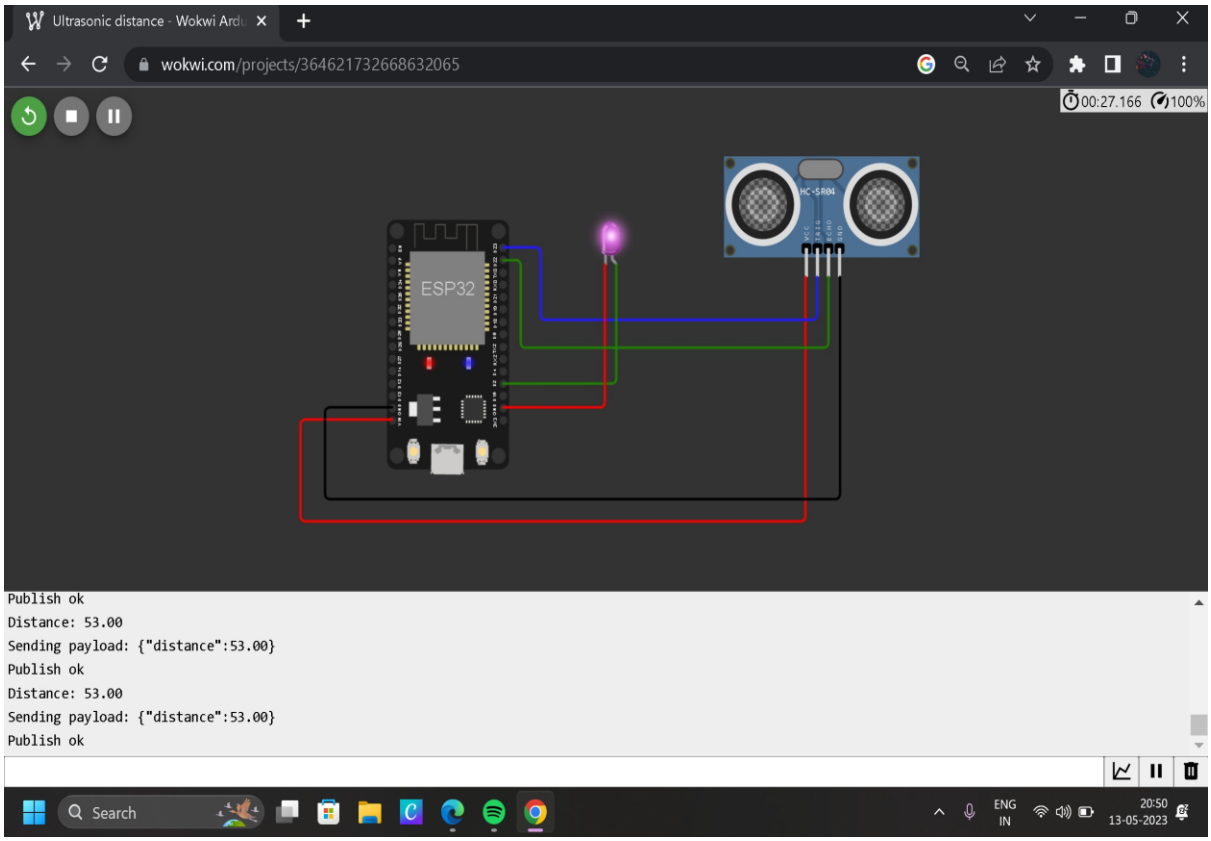

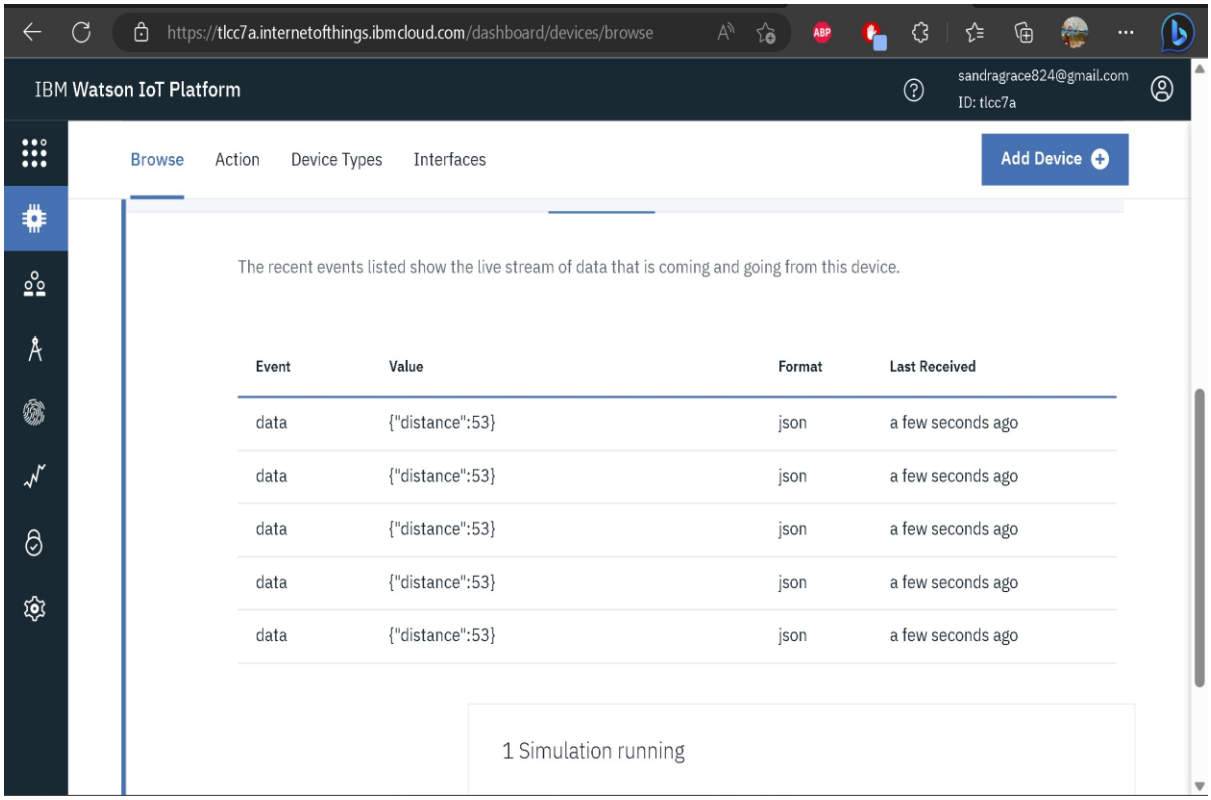

Sketch.ion:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include "Ultrasonic.h"
#define TRIG_PIN 23
#define ECHO_PIN 22
#define LED_PIN 2

Ultrasonic ultrasonic(TRIG_PIN, ECHO_PIN);

// IBM Watson IoT Platform credentials
#define ORG "tlcc7a"
#define DEVICE_TYPE "abcd"
```

```
#define DEVICE_ID "1234"
#define TOKEN "12345678"
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/data/fmt/json";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;

WiFiClient wifiClient;
PubSubClient client(server, 1883, wifiClient);

void setup() {
  Serial.begin(115200);
  pinMode(LED_PIN, OUTPUT);
  wificonnect();
  mqttconnect();
}

void loop() {
  float distance = ultrasonic.read();
  Serial.print("Distance: ");
  Serial.println(distance);

  if (distance < 100) {
    String payload = "{\"distance\":";
    payload += distance;
    payload += "}";
```

```
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
      Serial.println("Publish ok");
      digitalWrite(LED_PIN, HIGH);
      delay(500);
      digitalWrite(LED_PIN, LOW);
    } else {
      Serial.println("Publish failed");
    }
  }

  if (!client.loop()) {
    mqttconnect();
  }
  delay(500);
}

void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Connecting to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    Serial.println("connected");
```

```
  }
}

void wificonnect() {
  Serial.print("Connecting to WiFi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    Serial.print(".");
    delay(500);
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}
```

Diagram.json:

```
{
  "version": 1,
  "author": "Sandra grace",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -32, "left": -42, "attrs":
{} },
    {
```

```
      "type": "wokwi-hc-sr04",
      "id": "ultrasonic1",
      "top": -79.43,
      "left": 250.83,
      "attrs": { "distance": "51" }
    },
    {
      "type": "wokwi-led",
      "id": "led1",
      "top": -36.54,
      "left": 132.73,
      "attrs": { "color": "purple" }
    }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [ "esp:VIN", "ultrasonic1:VCC", "red", [ "h-79.8", "v79.51", "h-6.67" ] ],
    [ "esp:GND.2", "ultrasonic1:GND", "black", [ "h-58.47", "v71.68", "h382.67"
] ],
    [ "esp:D23", "ultrasonic1:TRIG", "blue", [ "h32.56", "v56.68", "h162.67" ] ],
    [ "led1:A", "esp:D2", "green", [ "v0" ] ],
    [ "led1:C", "esp:GND.1", "red", [ "v0" ] ],
    [ "ultrasonic1:ECHO", "esp:D22", "green", [ "v55.31", "h-267.52", "v-64.59"
] ]
  ],
  "dependencies": {}
} {
```

```
 "version": 1,
 "author": "Sandra grace",
 "editor": "wokwi",
 "parts": [
  { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -32, "left": -42, "attrs":
{} },
  {
   "type": "wokwi-hc-sr04",
   "id": "ultrasonic1",
   "top": -79.43,
   "left": 250.83,
   "attrs": { "distance": "51" }
  },
  {
   "type": "wokwi-led",
   "id": "led1",
   "top": -36.54,
   "left": 132.73,
   "attrs": { "color": "purple" }
  }
 ],
 "connections": [
  [ "esp:TX0", "$serialMonitor:RX", "", [] ],
  [ "esp:RX0", "$serialMonitor:TX", "", [] ],
  [ "esp:VIN", "ultrasonic1:VCC", "red", [ "h-79.8", "v79.51", "h-6.67" ] ],
  [ "esp:GND.2", "ultrasonic1:GND", "black", [ "h-58.47", "v71.68", "h382.67"
] ],
  [ "esp:D23", "ultrasonic1:TRIG", "blue", [ "h32.56", "v56.68", "h162.67" ] ],
```

```
    [ "led1:A", "esp:D2", "green", [ "v0" ] ],
    [ "led1:C", "esp:GND.1", "red", [ "v0" ] ],
    [ "ultrasonic1:ECHO", "esp:D22", "green", [ "v55.31", "h-267.52", "v-64.59"
] ]
  ],
  "dependencies": {}
}
```