

-ARMOIRE

Cabinet no. : Y

Cabinet material :INOX

Cabinet size :900x600x300

Brand of enclosure :IRINOX

Enclosure material :INOX

Equipment used :

Button brand :SCHNEIDER ELECTRIC

Button language :ESPAGNOL

PLC brand :/

HMI brand :/

Wiring

Breaking capacity lcc :10kA

Shielded cables on drives

Wire colours :

Phase 230V: Black24VDC: Violet

Neutral 230V: Blue12VDC or 15VDC : Red

115V phase: Brown5VDC: Grey

Neutral 115V: Brown with blue stripes48VDC : Yellow

Earth: Green/Yellow0VDC : White

External potential : Orange

External neutral: Orange with blue stripes

Estimated electrical characteristics

Total rated power (kW) :1,5

Total rated current (Amps) :3,5

Recommended main circuit breaker (Customer)

Circuit breaker rating (Amps) :20

Circuit breaker curve (type) :D

Minimum cross-section of supply cable (Customer) :

400V 3PH +N + GND 50/60Hz

Wire cross-section (mm²) :4

Cable type (Number of wires) :H07 RN-F 5G4mm²H07 RNF / U1000 R2V

The main circuit breaker and the supply cable may be different depending on the electrical installation
(Cable material, length, installation method, ...)

V3	MAJ - Raccordement du fil 10 et la bobine KA06	18/04/2025	AN	JT	JT
V2	MAJ PARAMETRES VARIATEURS	24/03/2025	JT	JT	JT
V1	CREATION	12/02/2025	DB	JT	JT
INDEX	MODIFICATION	DATE	DESIGNED BY	VERIFIED BY	APPROVED BY

COFFRET CONVOYAGE ENTREE GENESYS

GENESYS ENTRY CONVEYOR BOX

DESIGNED BY : DB

VERIFIED BY : JT

DATE CREATED : 10/02/2025

CUSTOMER : IBERAVI

CONTRACT NO. : C01447

PROCESS N° : PMXA-C014471

ECAT-ID

Z.I DE KERIEL

29800 PLOUEDERN

FRANCE

Tel : (33).2.98.85.31.36

Fax : (33).2.98.85.31.38

E-mail : ecatid.service@ceva.com

ENVIRONNEMENT IGE-XAO : Elec_IEC V5R2_ECATID Environment for electrical controls and automation systems (according to IEC standard)

FOLIO : 01/38

Ecat-iD Campus

COUNTRY :
ESPAGNE

DRAWING NUMBER :
SMXA-C014471-OPT1

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.


																				A
																				B
																				C
																				D
																				E
																				F
																				G
																				H
																				I
																				J
																				K
																				L
																				M
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		LISTE DE FOLIOS FRANCAIS				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		FRENCH FOLIO LIST								ARTICLE : SMXA-C014471-OPT1				INDEX : V1	
			E-mail : ecatic.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATID								FOLIO : 03/38					

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36	Date of creation : 10/02/2025		LISTE DE FOLIOS ANGLAIS				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI			COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38	Designed by : DB		ENGLISH FOLIOS LIST								ARTICLE : SMXA-C014471-OPT1			INDEX : V1			
			E-mail : ecatic.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATID							FOLIO : 04/38						

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

																				A	
																				B	
																				C	
																				D	
																				E	
																				F	
																				G	
																				H	
																				I	
																				J	
																				K	
																				L	
																				M	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE				Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		LISTE DE FOLIOS ANGLAIS				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
				Fax : (33).2.98.85.31.38		Designed by : DB		ENGLISH FOLIOS LIST								ARTICLE : SMXA-C014471-OPT1		INDEX : V1			
				E-mail : ecatic.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATICID								FOLIO : 05/38					


THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

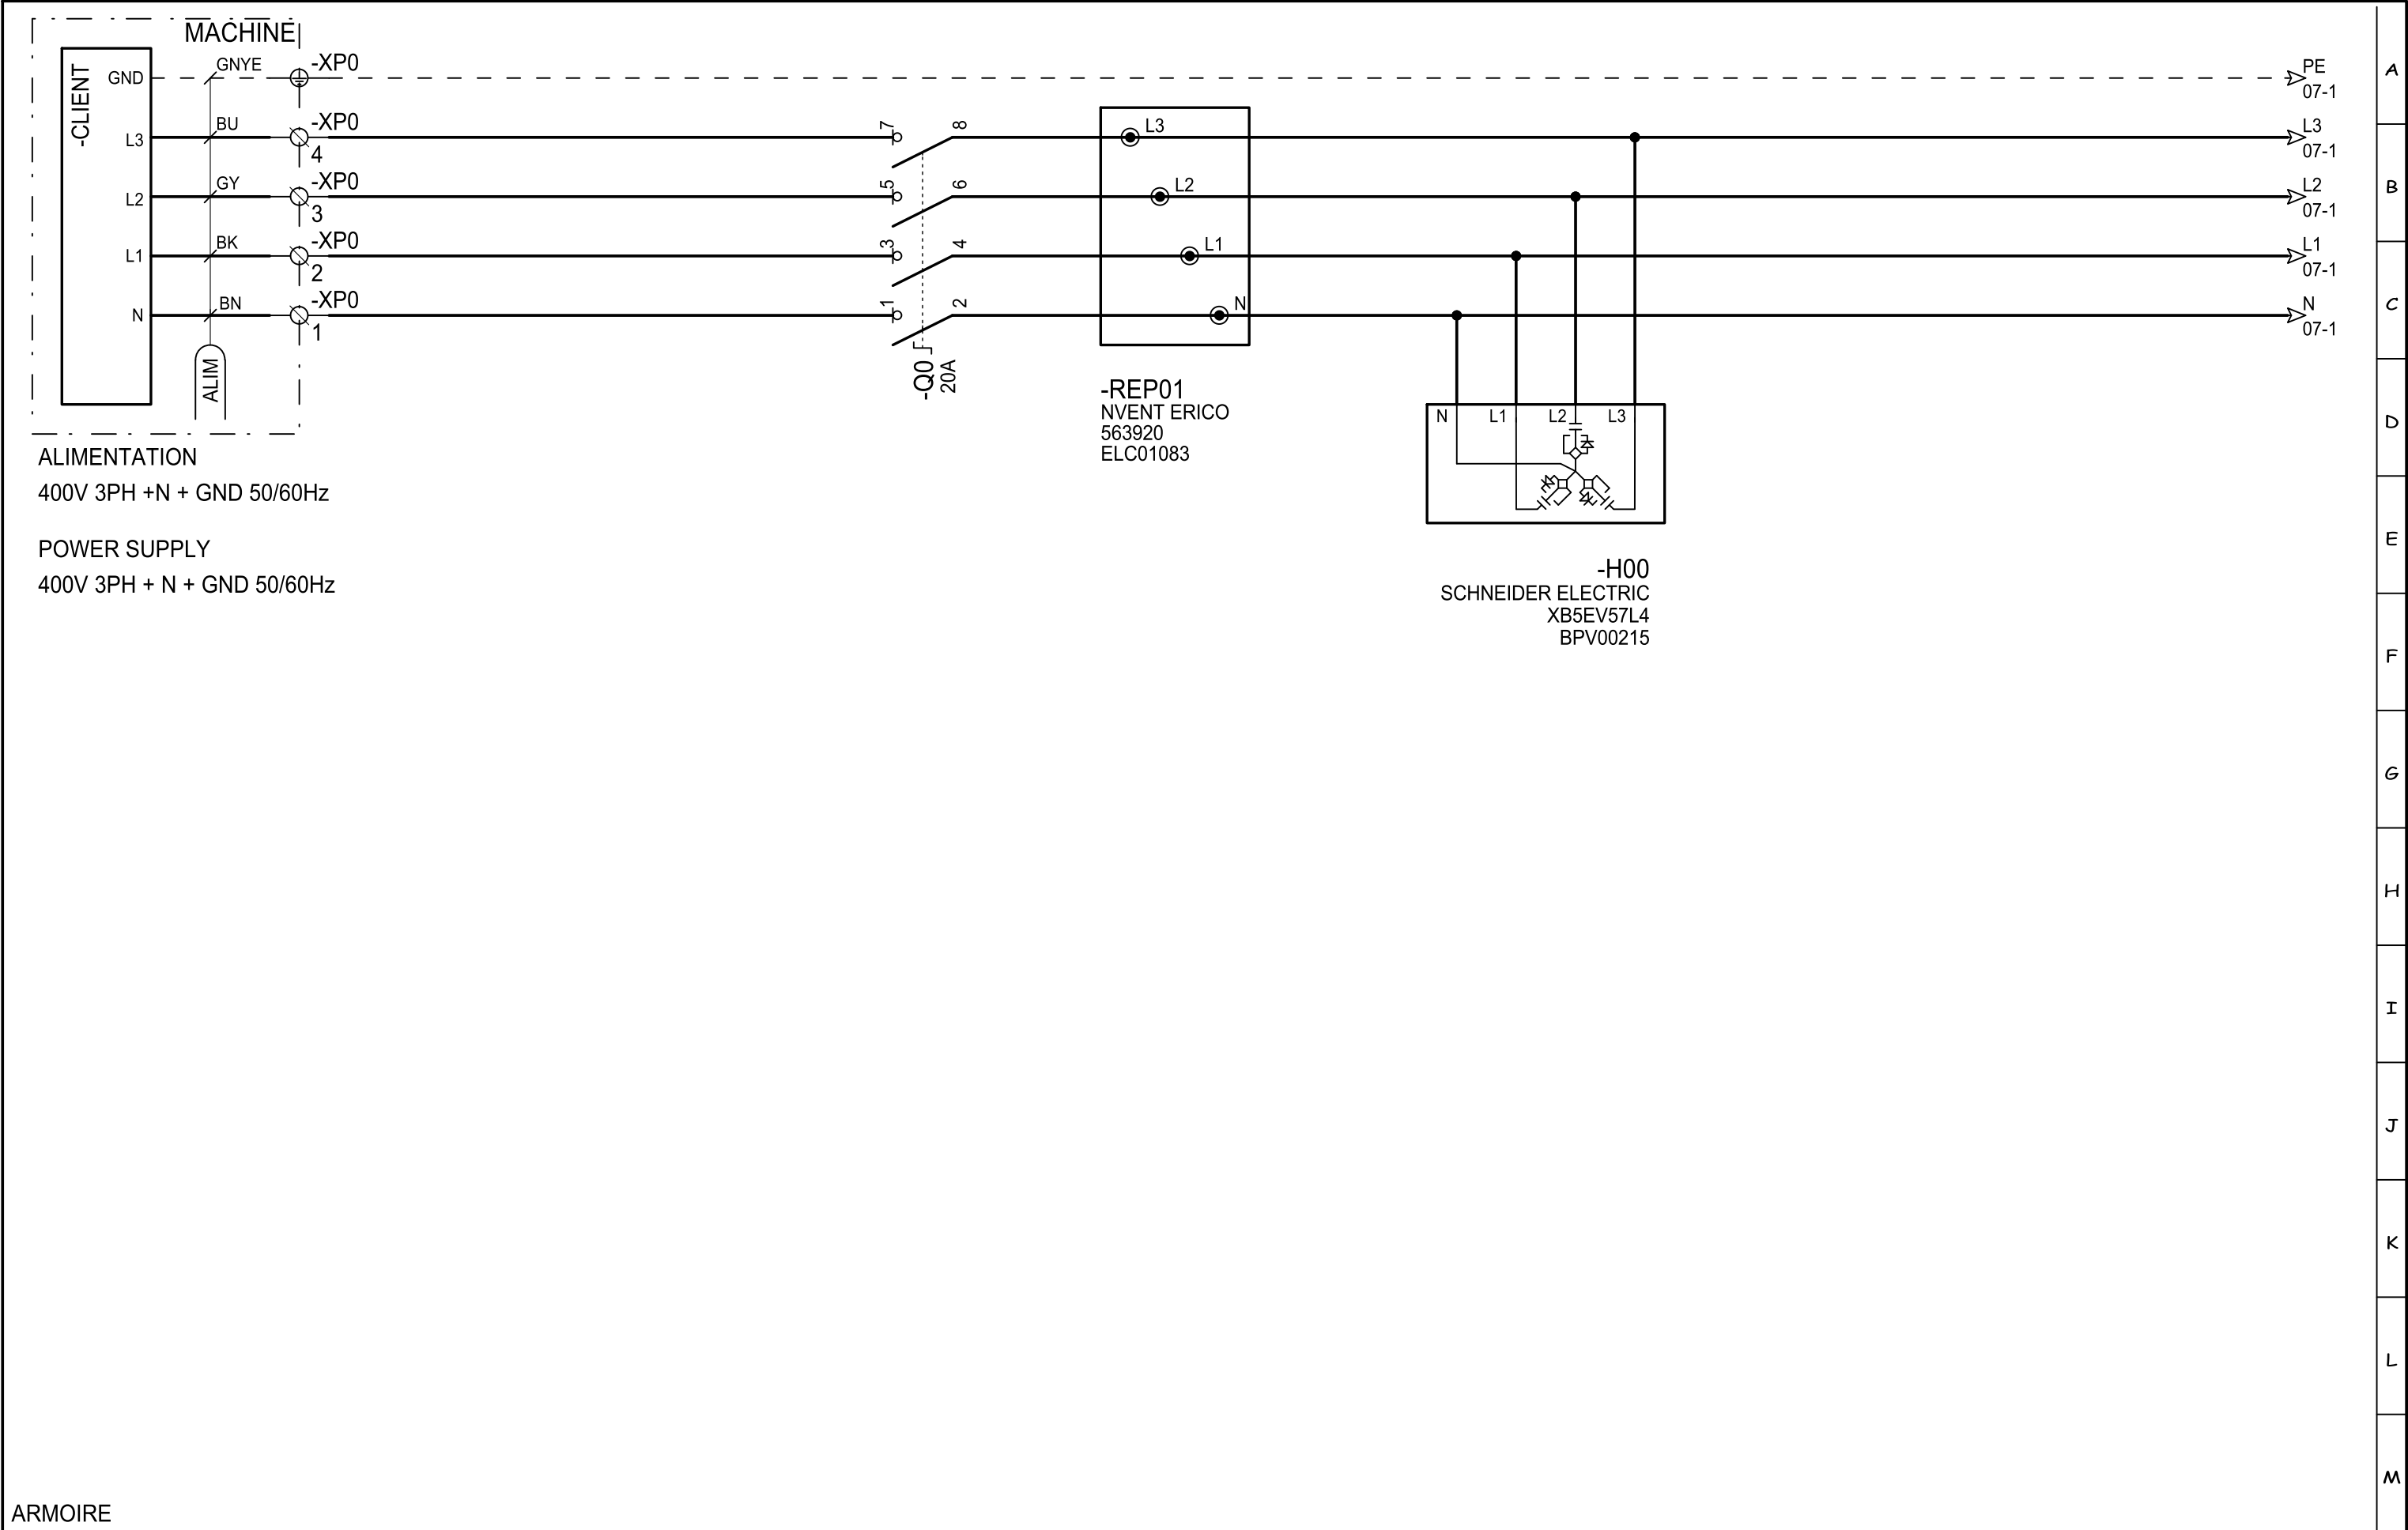

ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		SCHEMA DE PUISSANCE			 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		POWER DIAGRAM							ARTICLE :		SMXA-C014471-OPT1		INDEX : V1	
			E-mail : ecaticid.service@ceva.com			ENVIRONNEMENT : Elec_IEC V5R2_ECATICID								FOLIO : 06/38					

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

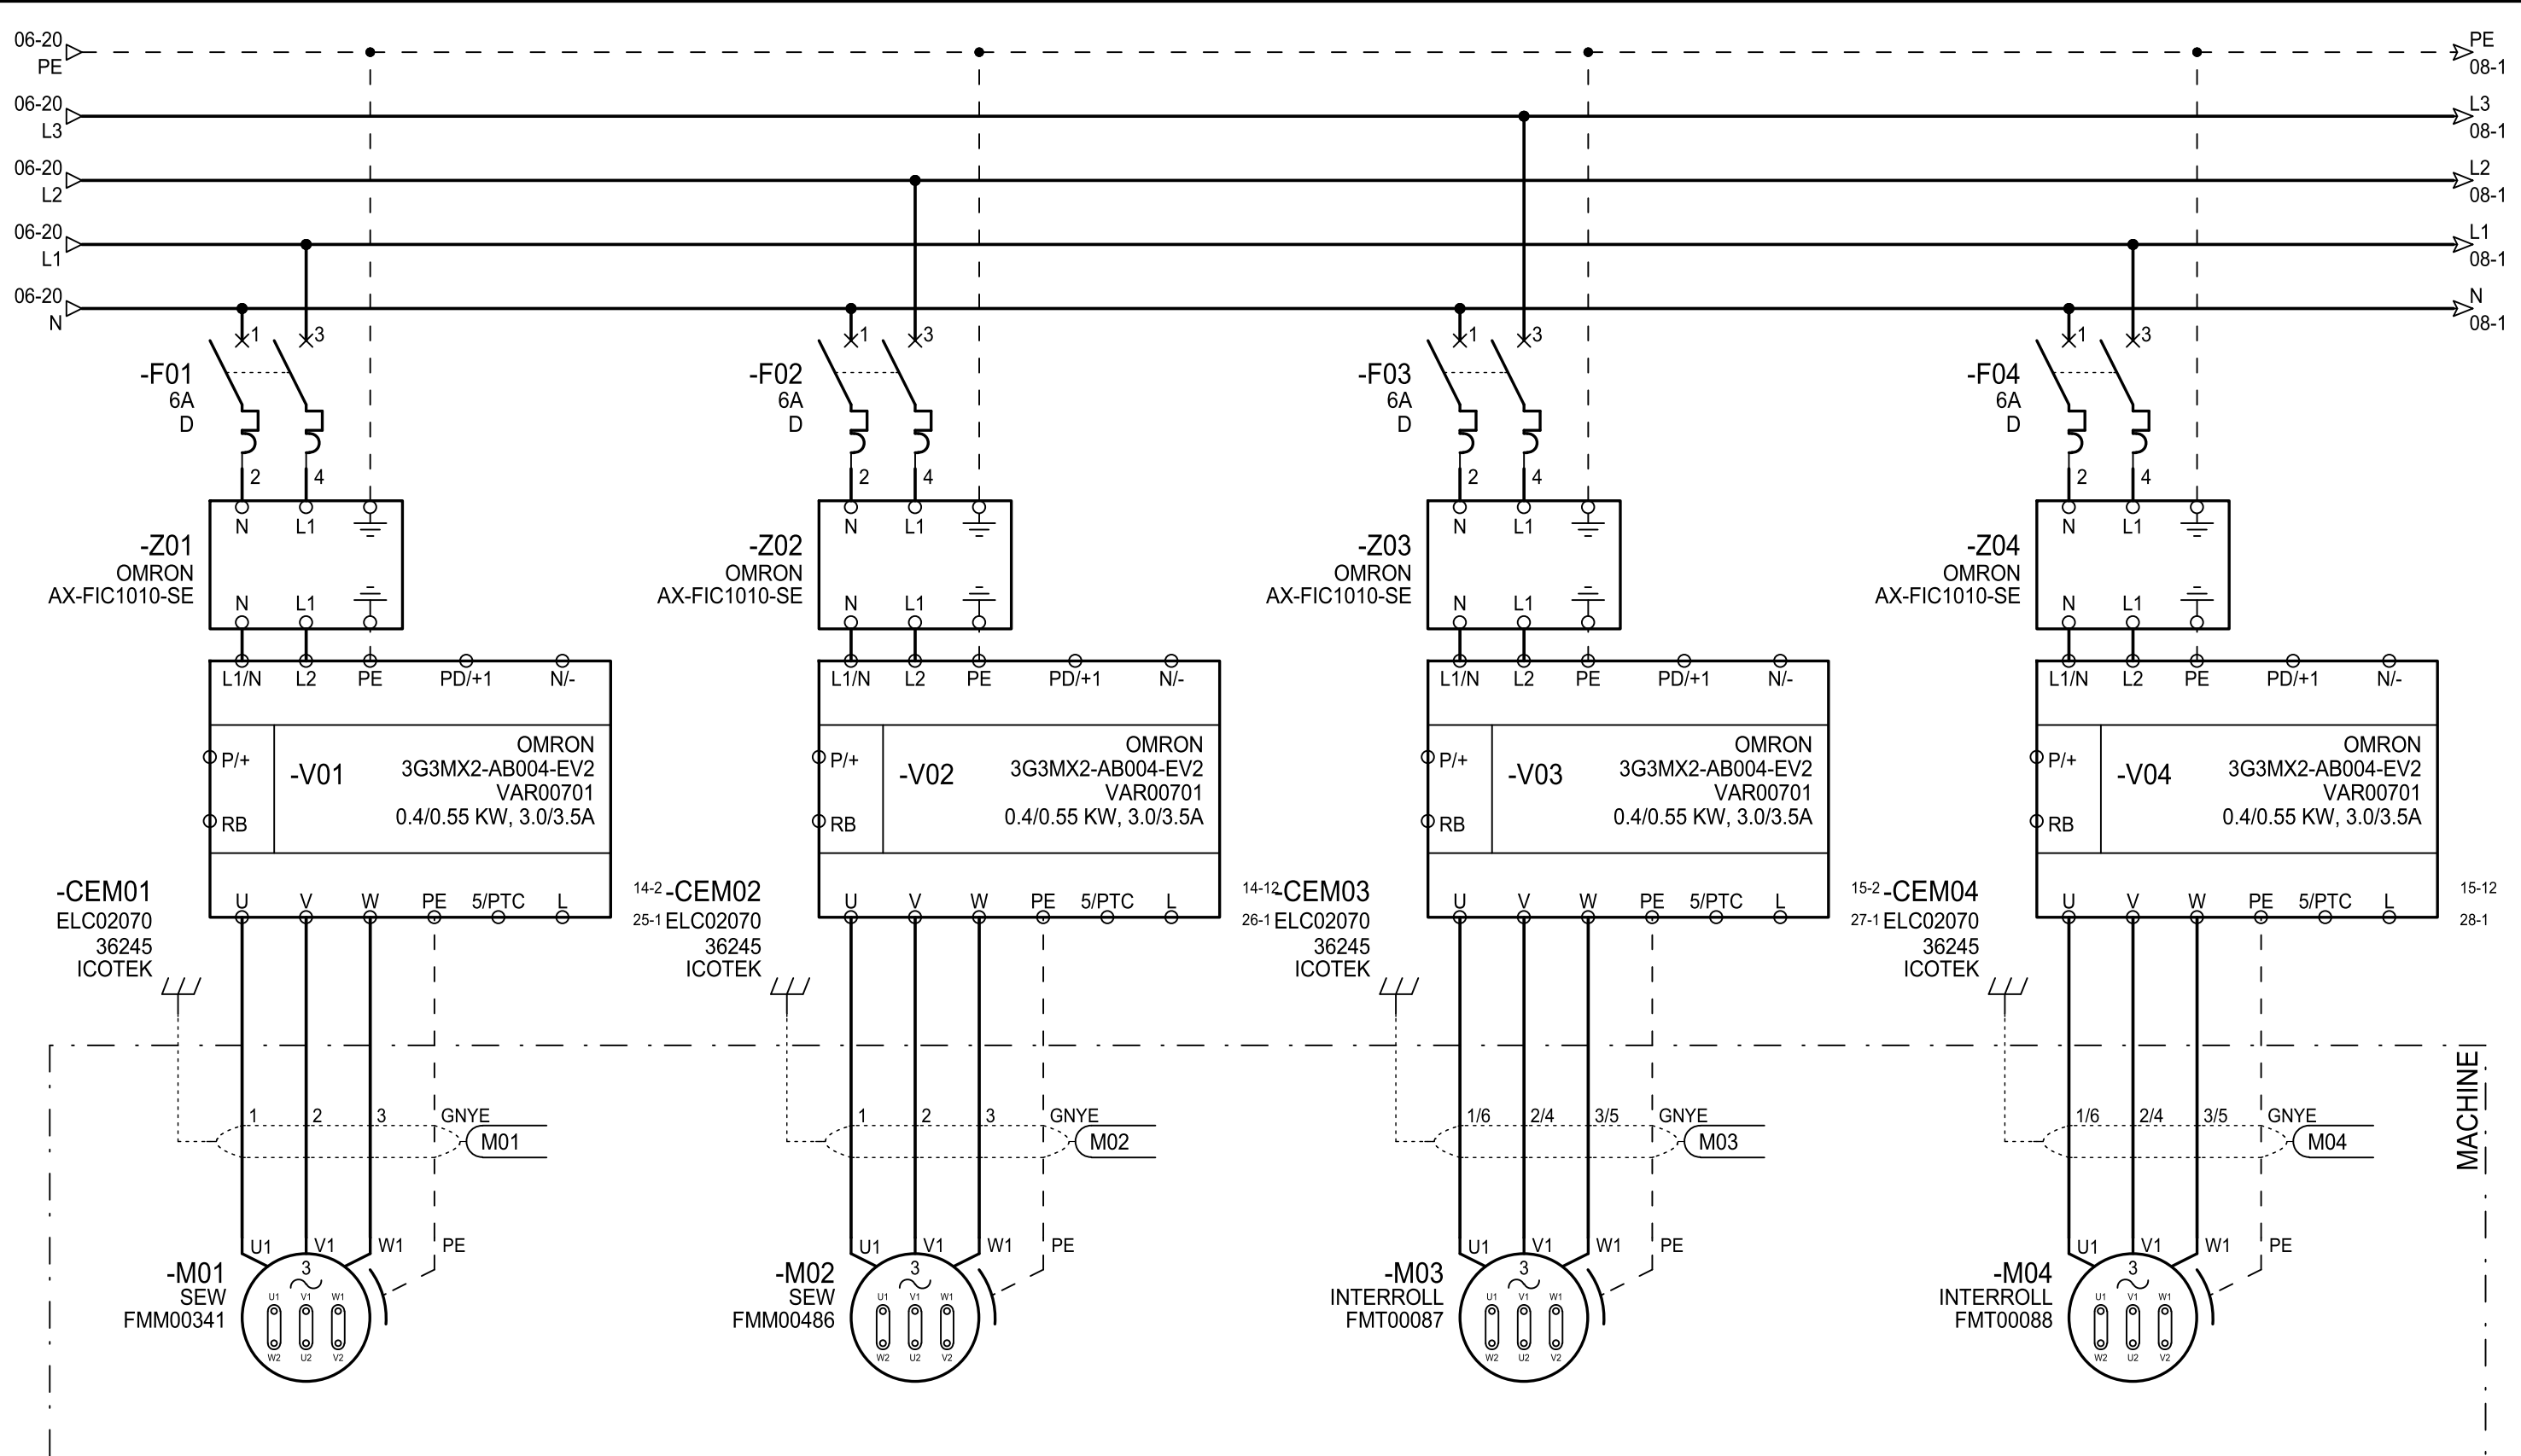


CONVOYEUR DE TRI
SORTING CONVEYOR
1,78 / 1,02A
0,37KW 230/400V 50/60HZ

CONVOYEUR SORTIE GENESYS
GENESYS OUTFEED CONVEYOR
1,78 / 1,02A
0,37KW 230/400V 50/60HZ

CONV. ELEVATEUR SORTIE GENESYS
GENESYS OUTFEED ELEVATOR CONV.
1.3/ 0.75A
0,3KW 230/400V 50/60HZ

CONV. ELEVATEUR ENTREE COMPTEUSE
COUNTING INFEEED ELEVATOR CONV.
1.3/ 0.75A
0,3KW 230/400V 50HZ

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

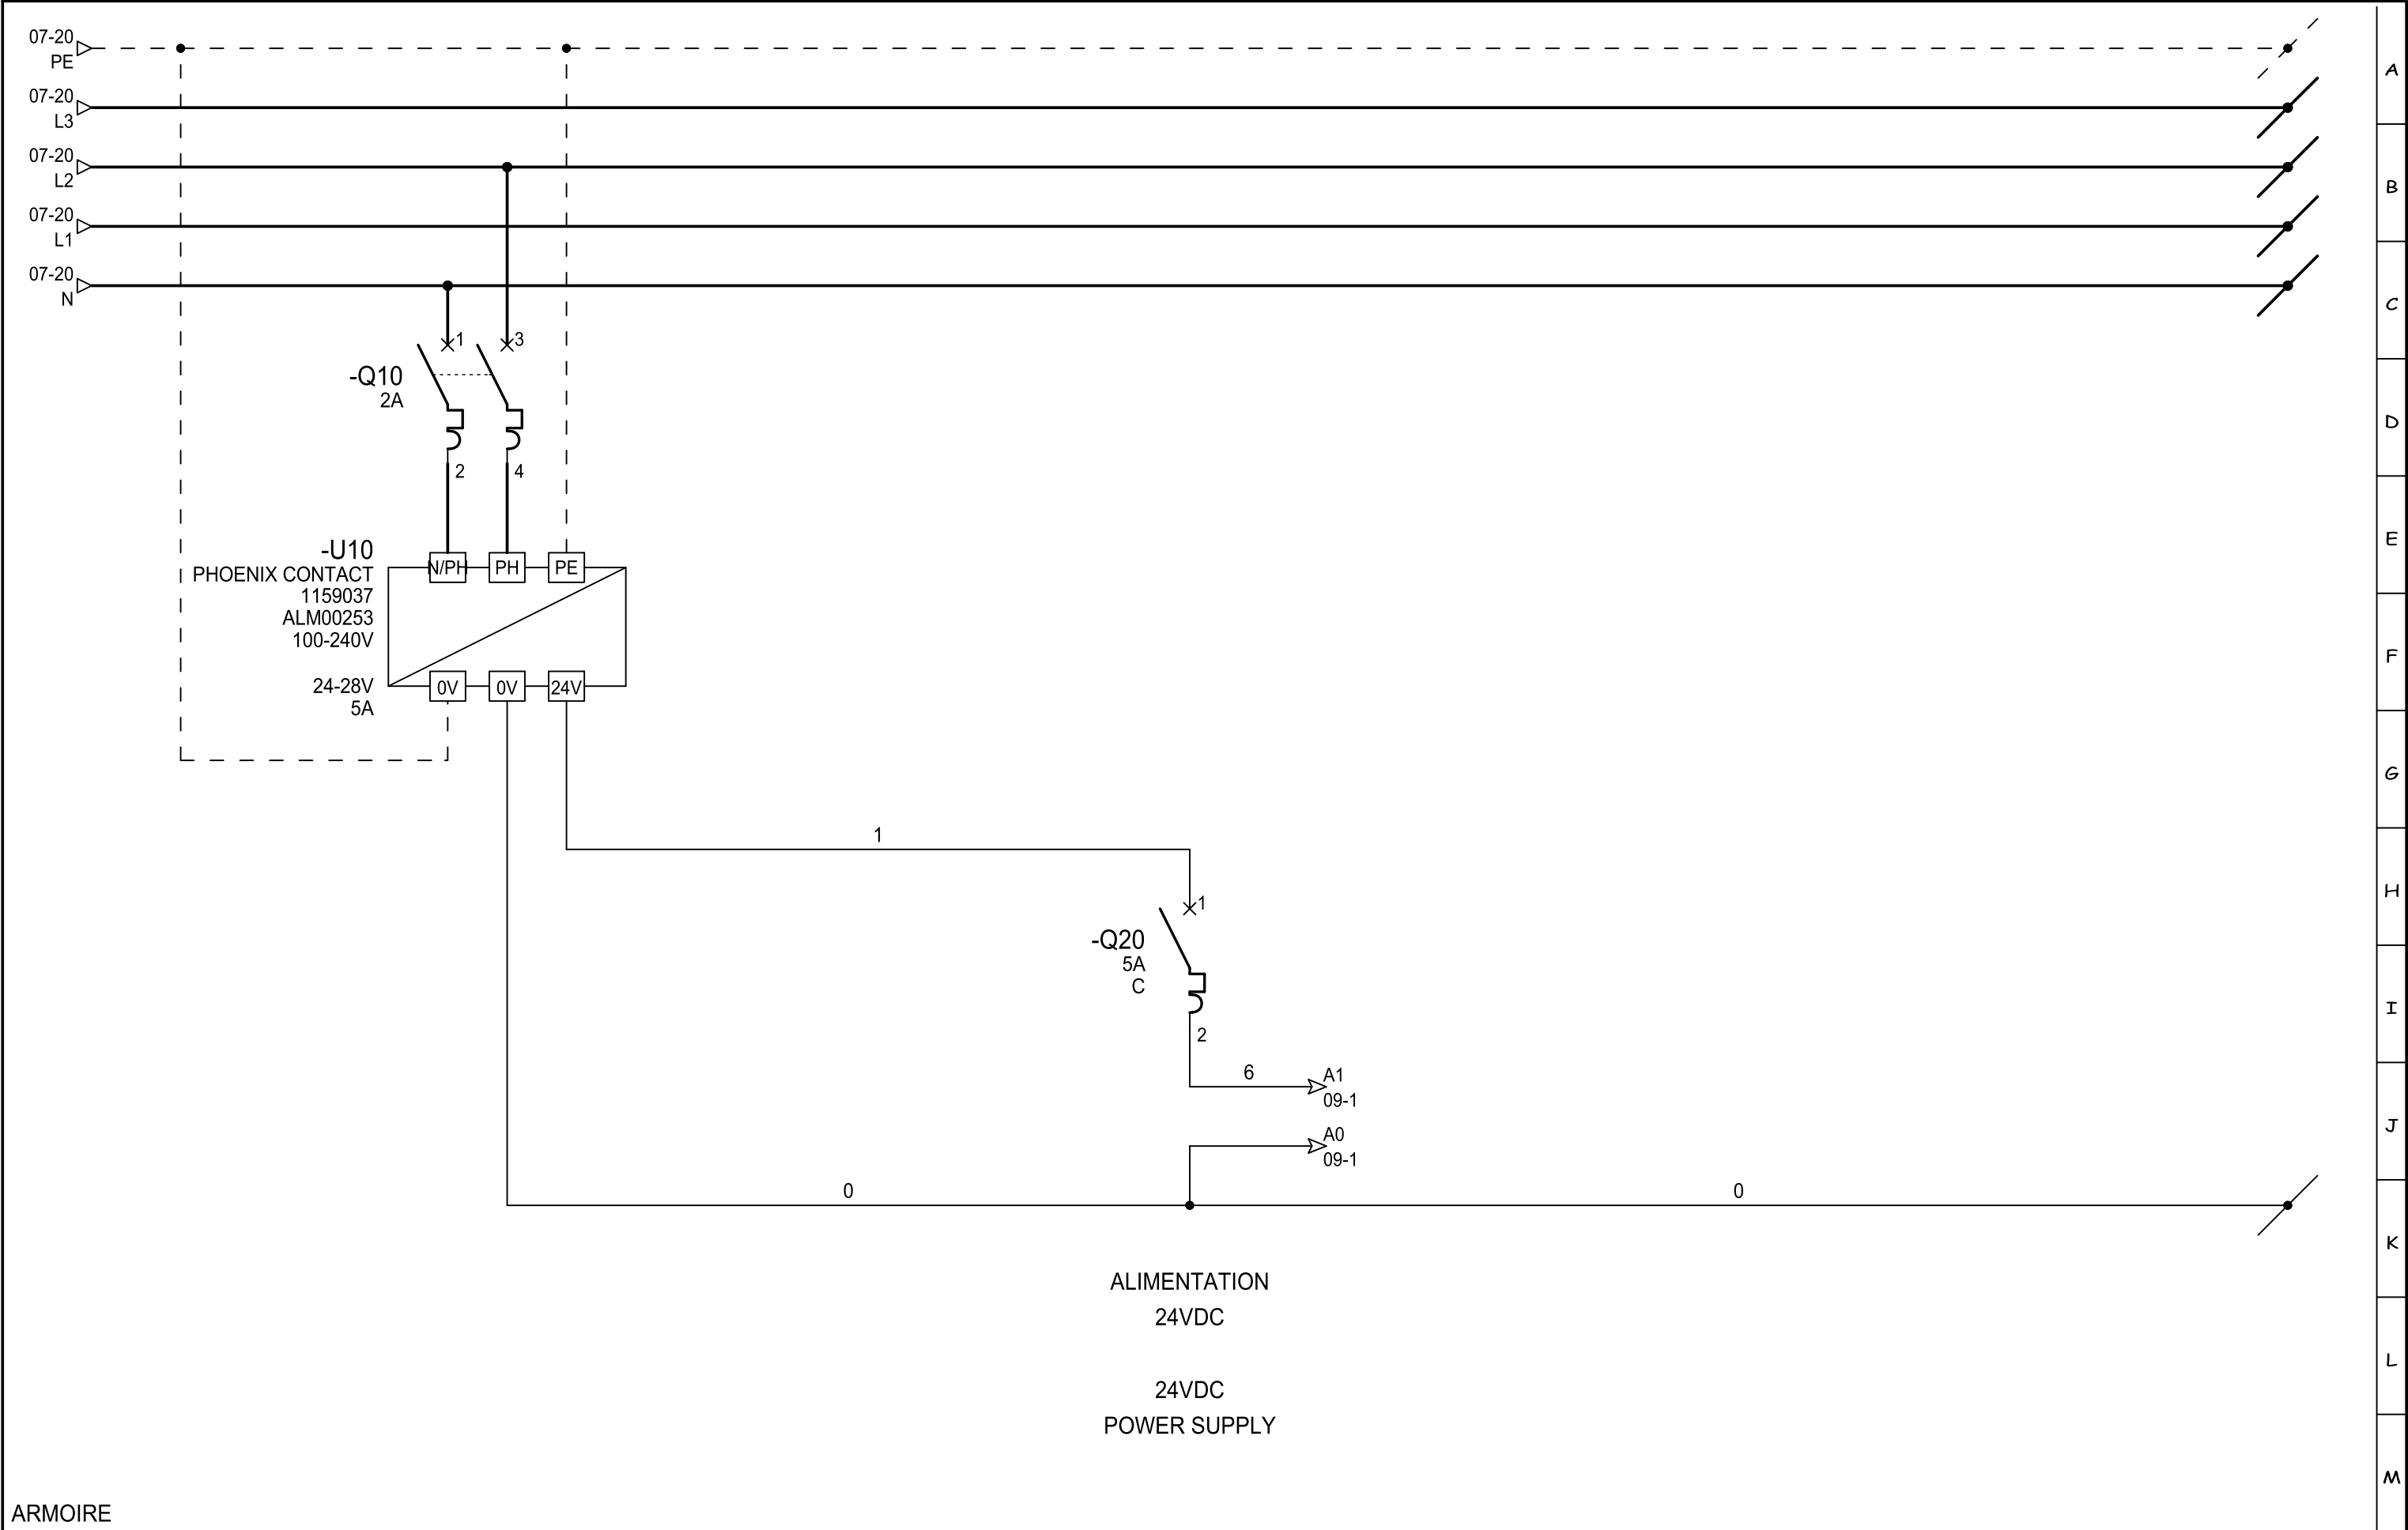


ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		SCHEMA DE PUISSANCE			 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		POWER DIAGRAM							ARTICLE : SMXA-C014471-OPT1				INDEX : V1	
			E-mail : ecatic.service@ceva.com			ENVIRONNEMENT : Elec_IEC V5R2_ECATID			FOLIO : 08/38										

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		SCHEMA DE COMMANDE				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		CONTROL DIAGRAM								ARTICLE : SMXA-C014471-OPT1		INDEX : V1			
			E-mail : ecatic.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATID								FOLIO : 09/38					




THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

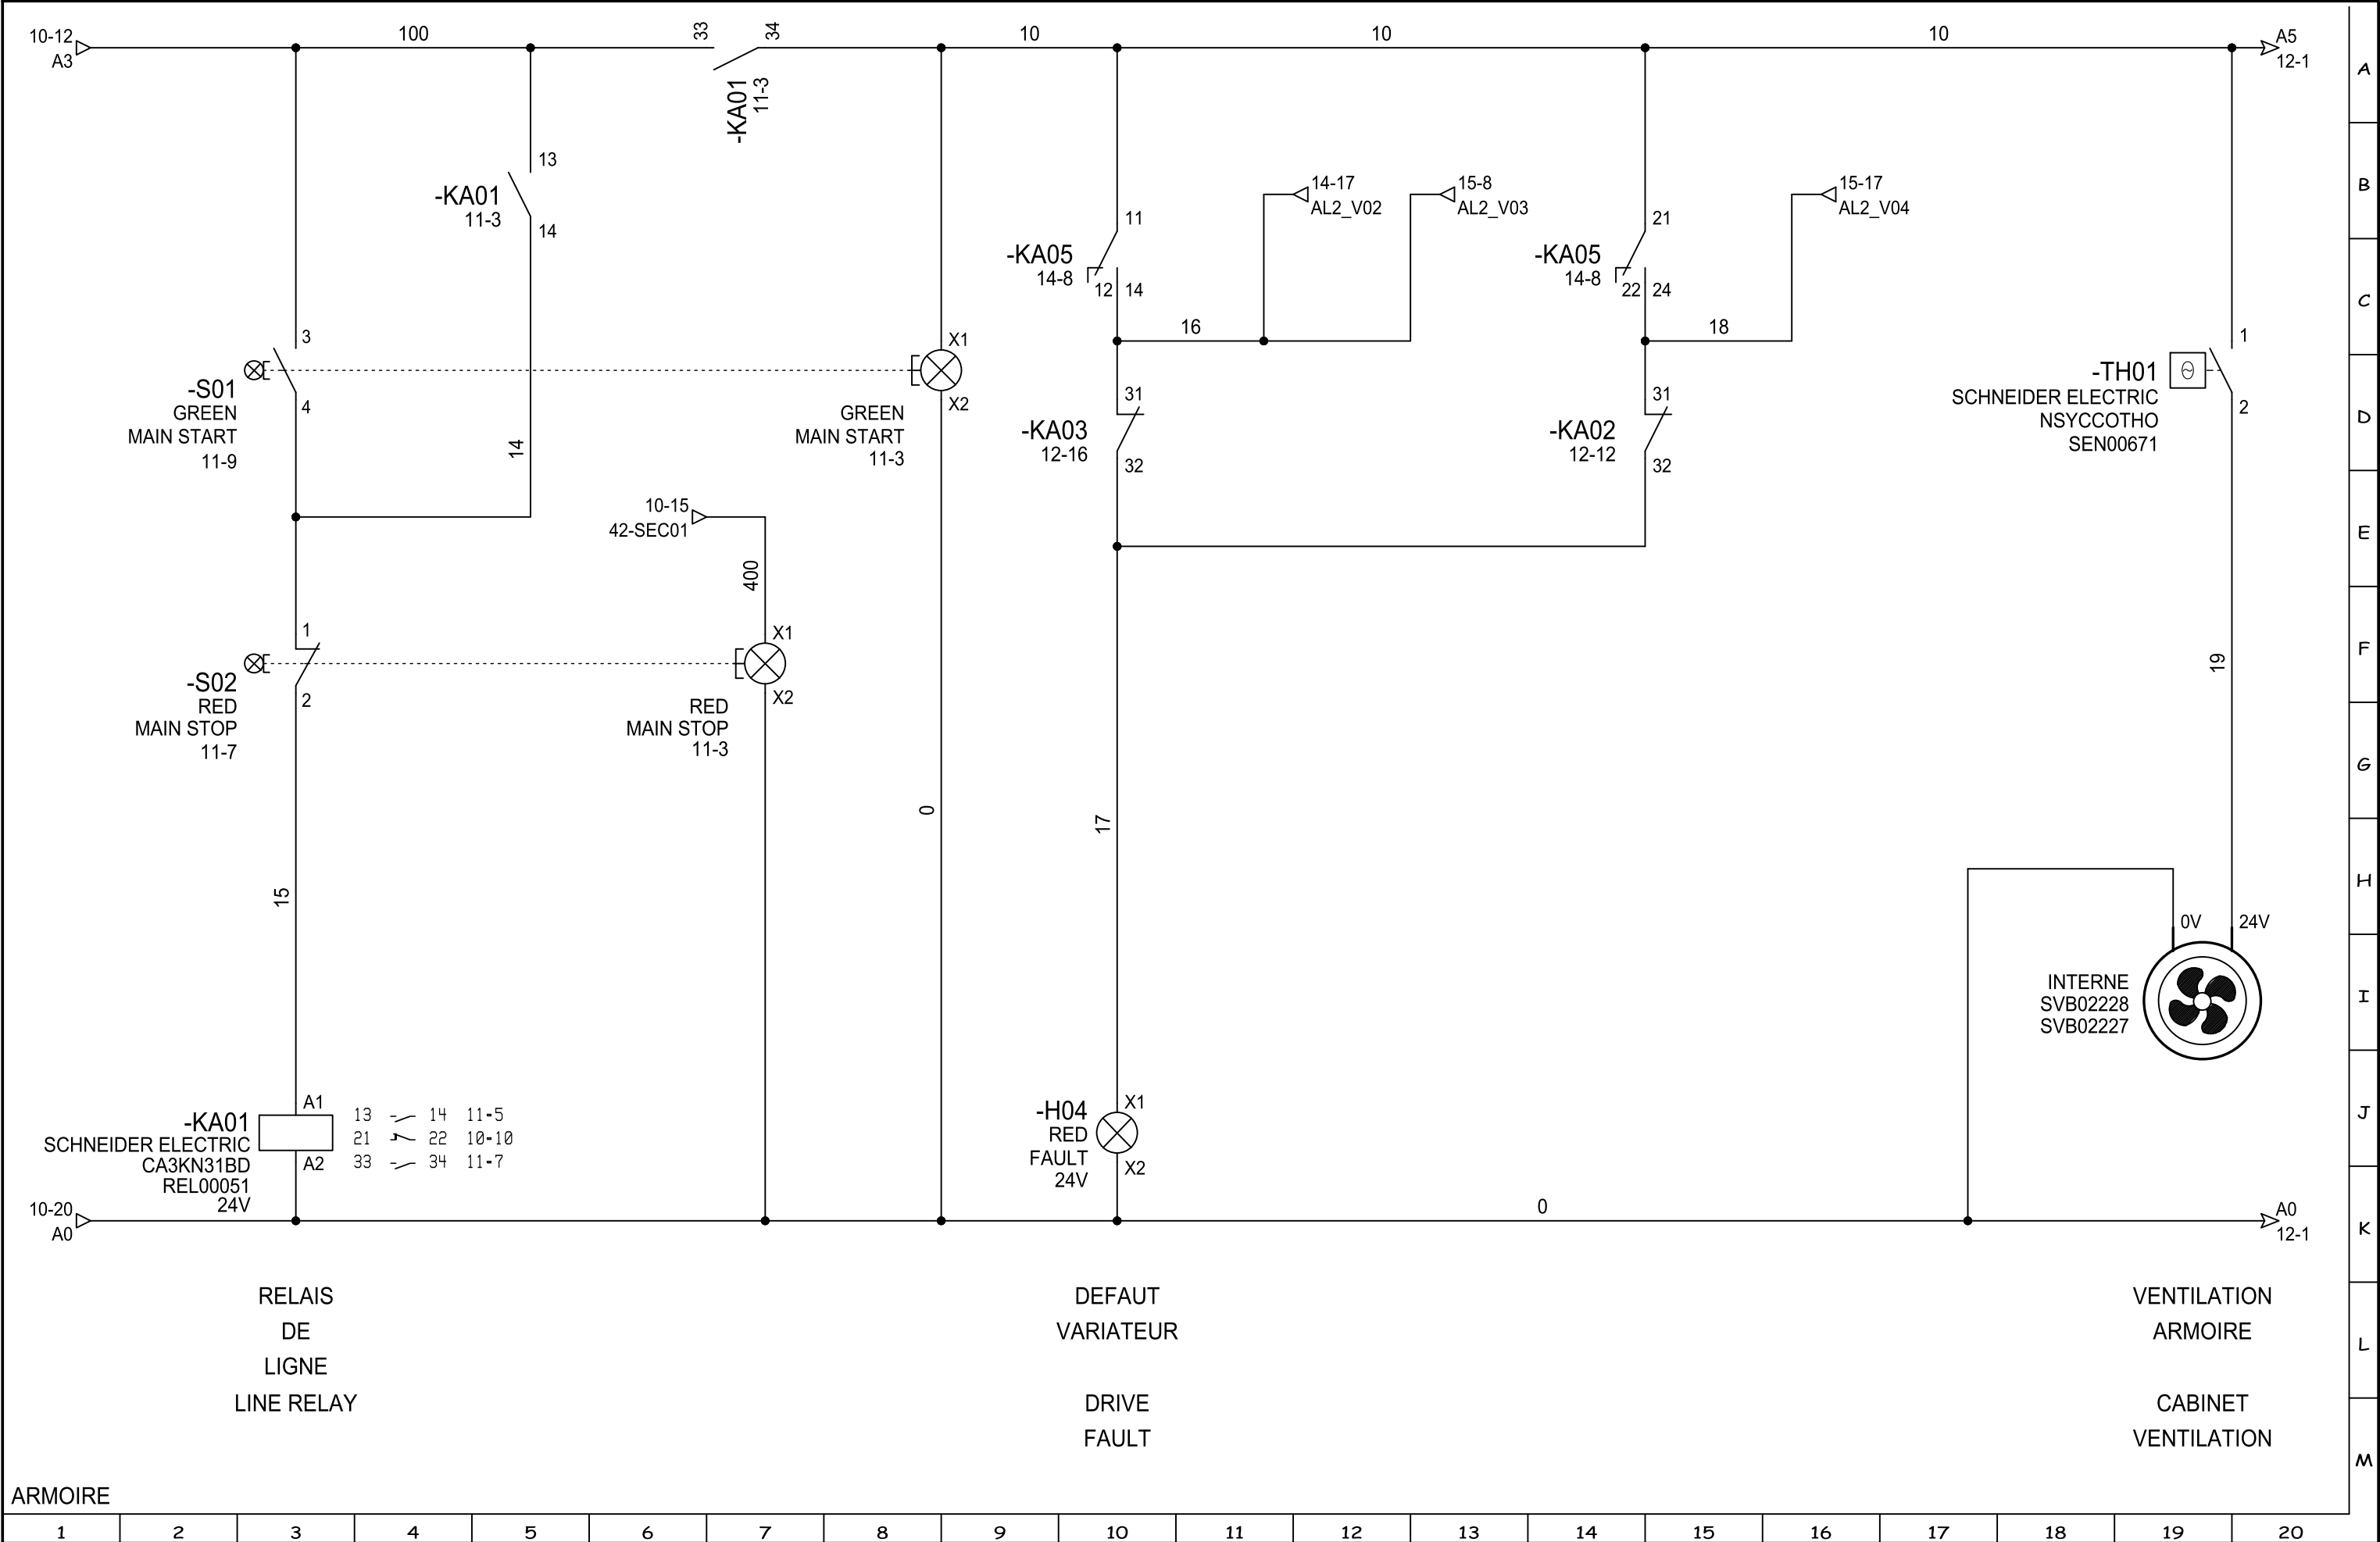


ARMOIRE

ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE	Tél : (33).2.98.85.31.36	Date of creation : 10/02/2025	SCHEMA DE COMMANDE	 Ecat-iD Campus	CONTRACT : C01447	CUSTOMER : IBERAVI	COUNTRY : ESPAGNE
	Fax : (33).2.98.85.31.38	Designed by : DB	CONTROL DIAGRAM		ARTICLE : SMXA-C014471-OPT1	INDEX : V1	
	E-mail : ecaticid.service@ceva.com	ENVIRONNEMENT : Elec_IEC V5R2_ECATICID				FOLIO : 11/38	

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

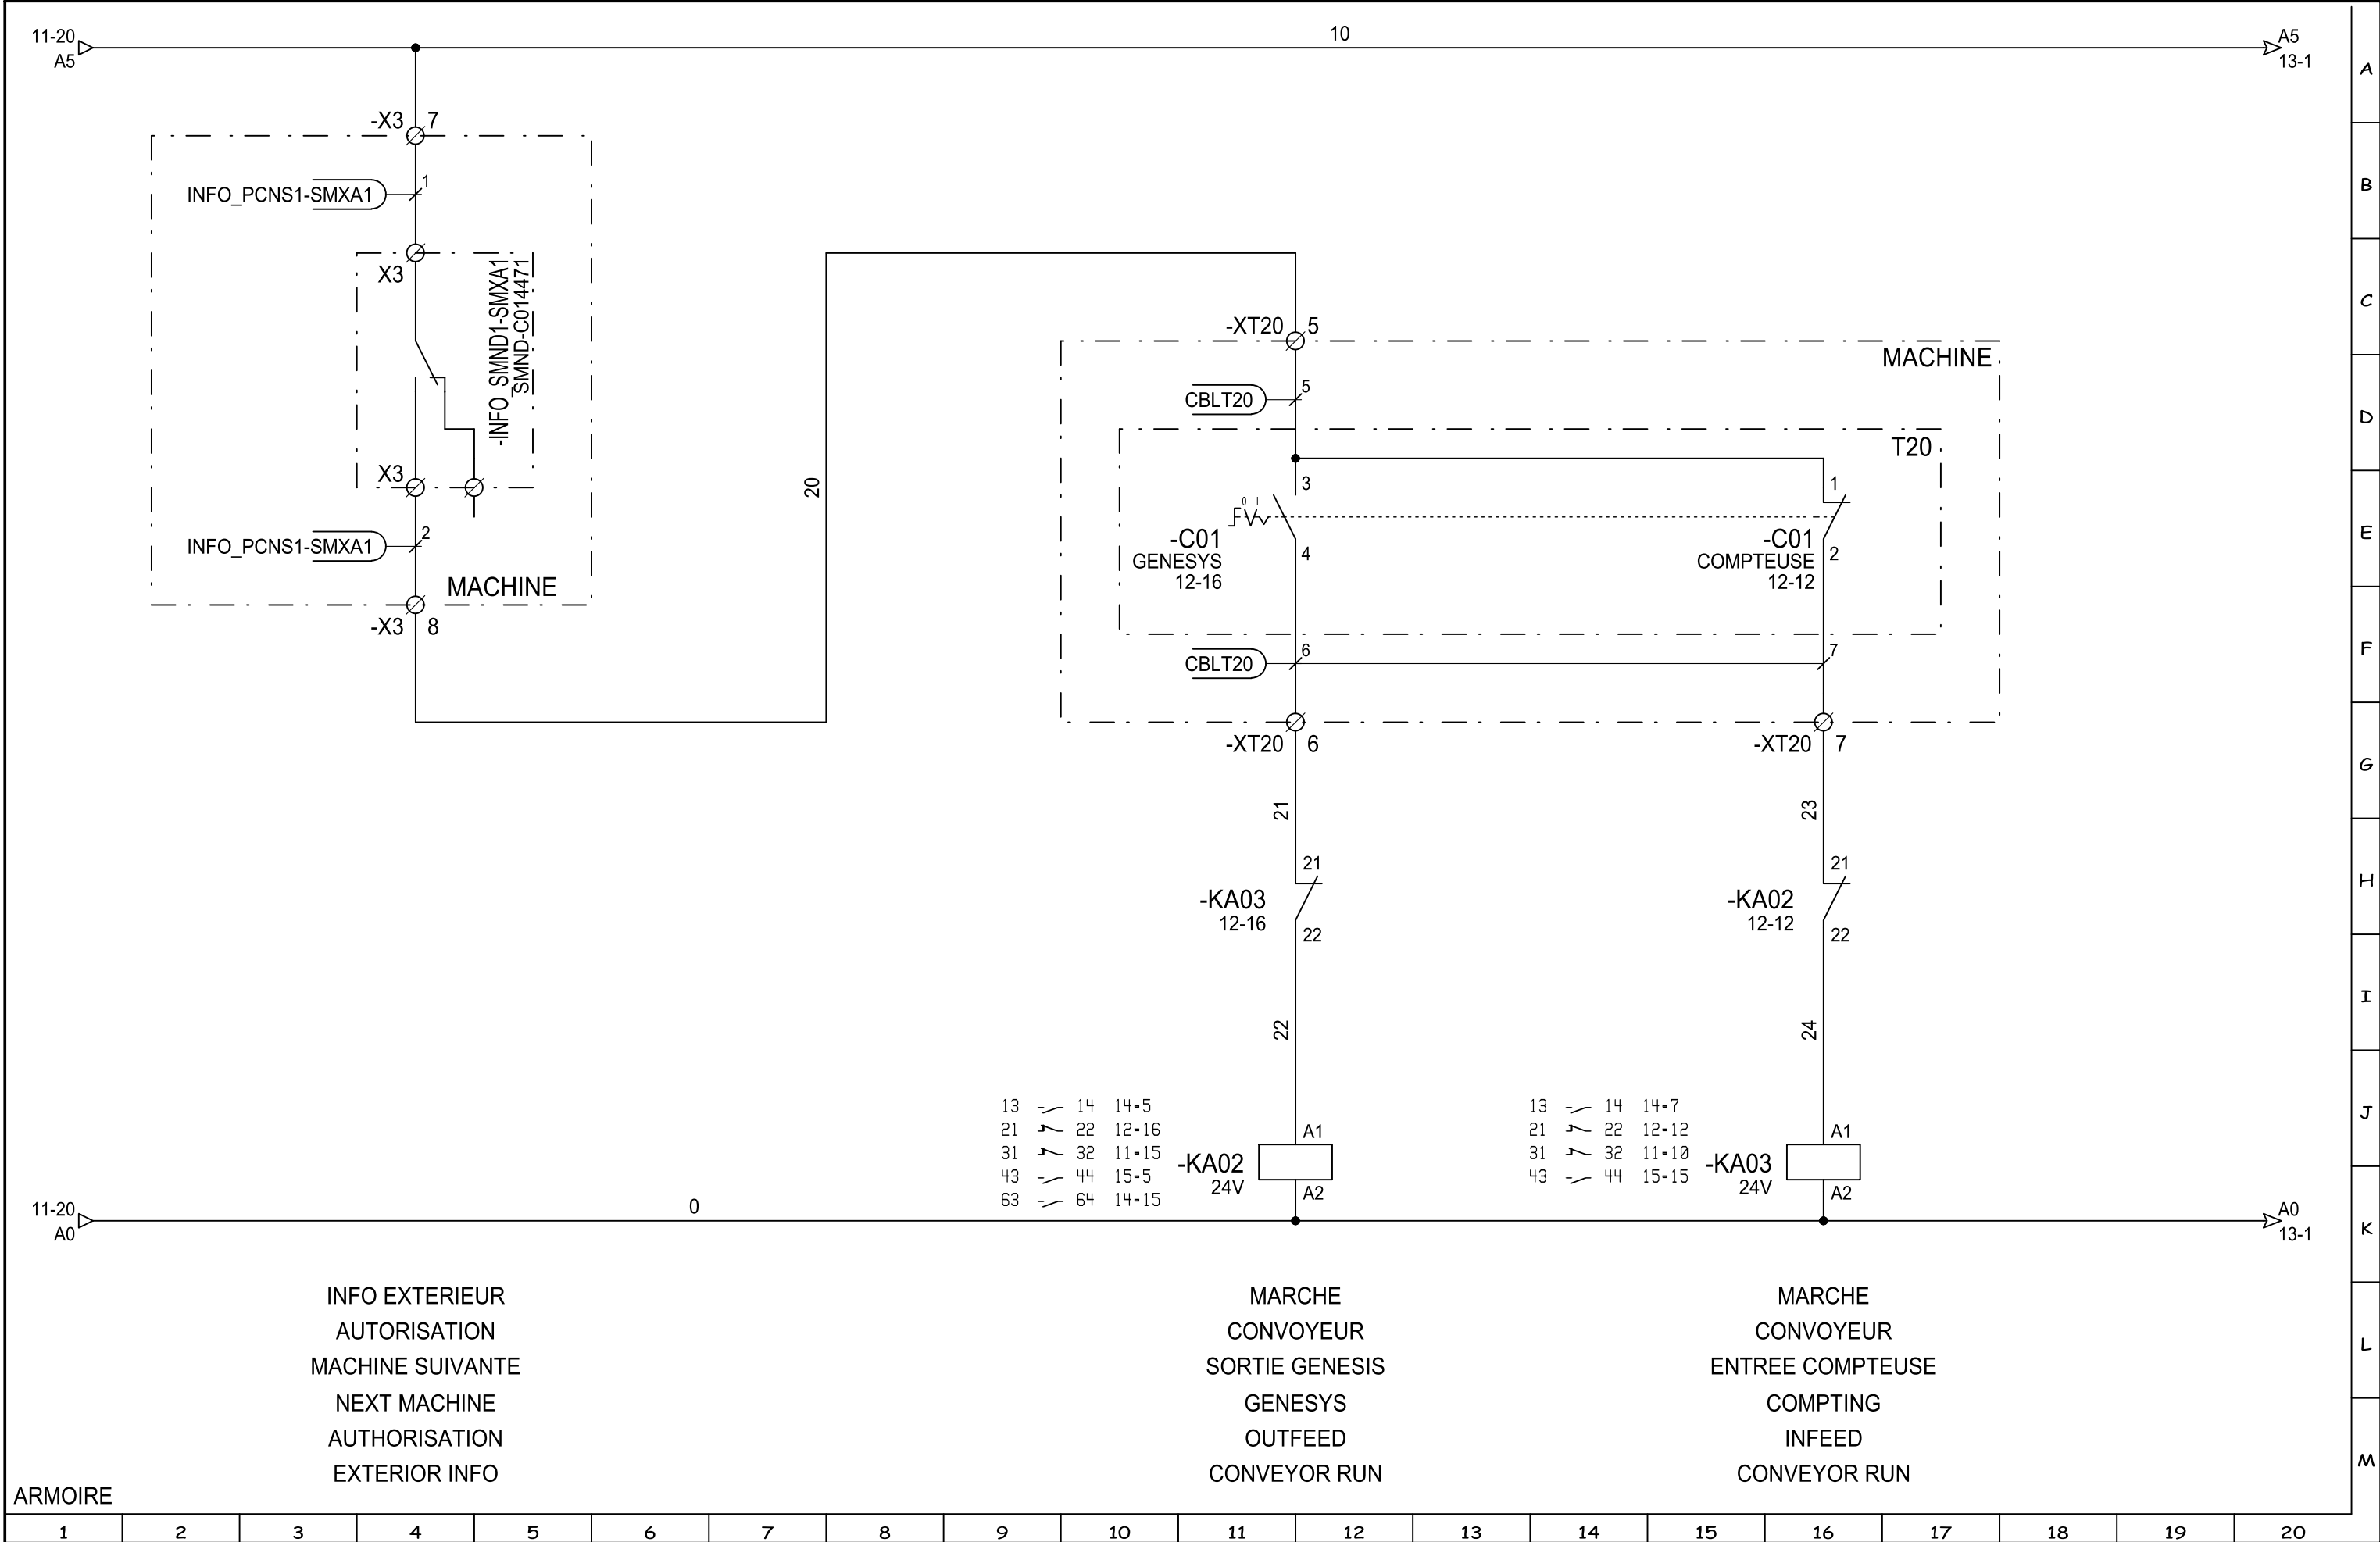


THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

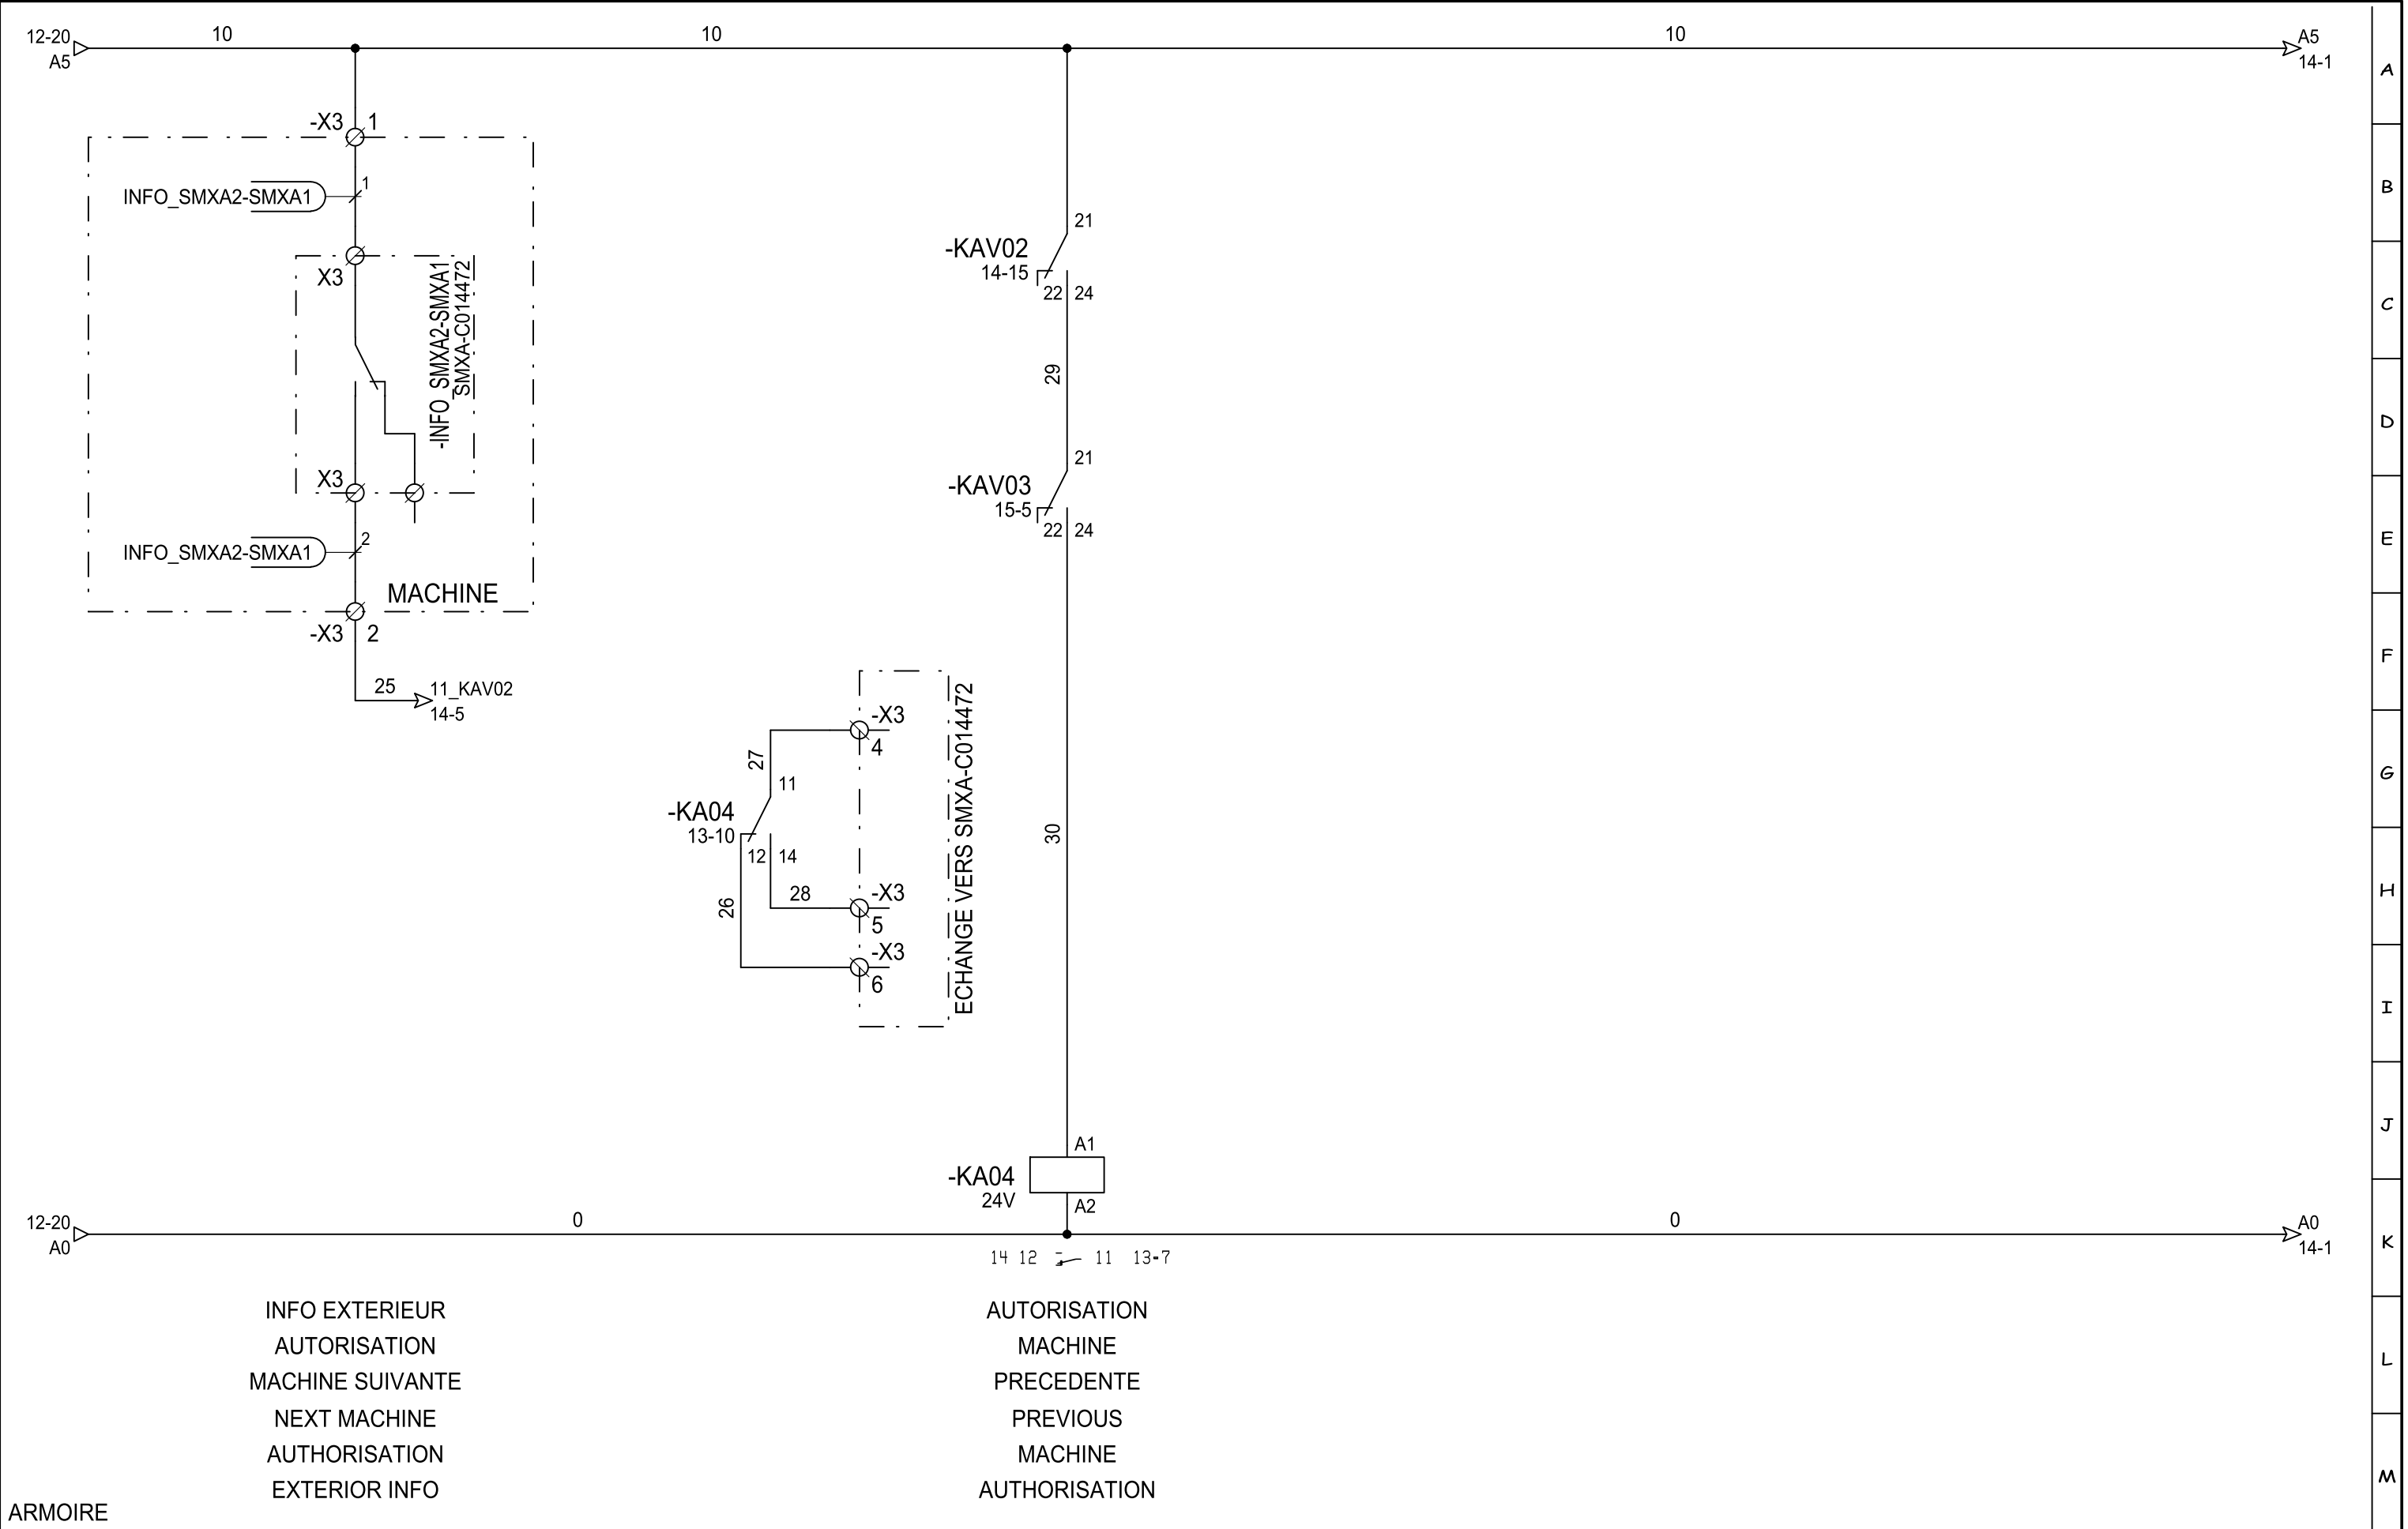


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36 Fax : (33).2.98.85.31.38 E-mail : ecaticid.service@ceva.com		Date of creation : 10/02/2025		SCHEMA DE COMMANDE				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI			COUNTRY : ESPAGNE	
					Designed by : DB		CONTROL DIAGRAM								ARTICLE : SMXA-C014471-OPT1				INDEX : V1		
					ENVIRONNEMENT : Elec_IEC V5R2_ECATICID				FOLIO : 13/38												

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

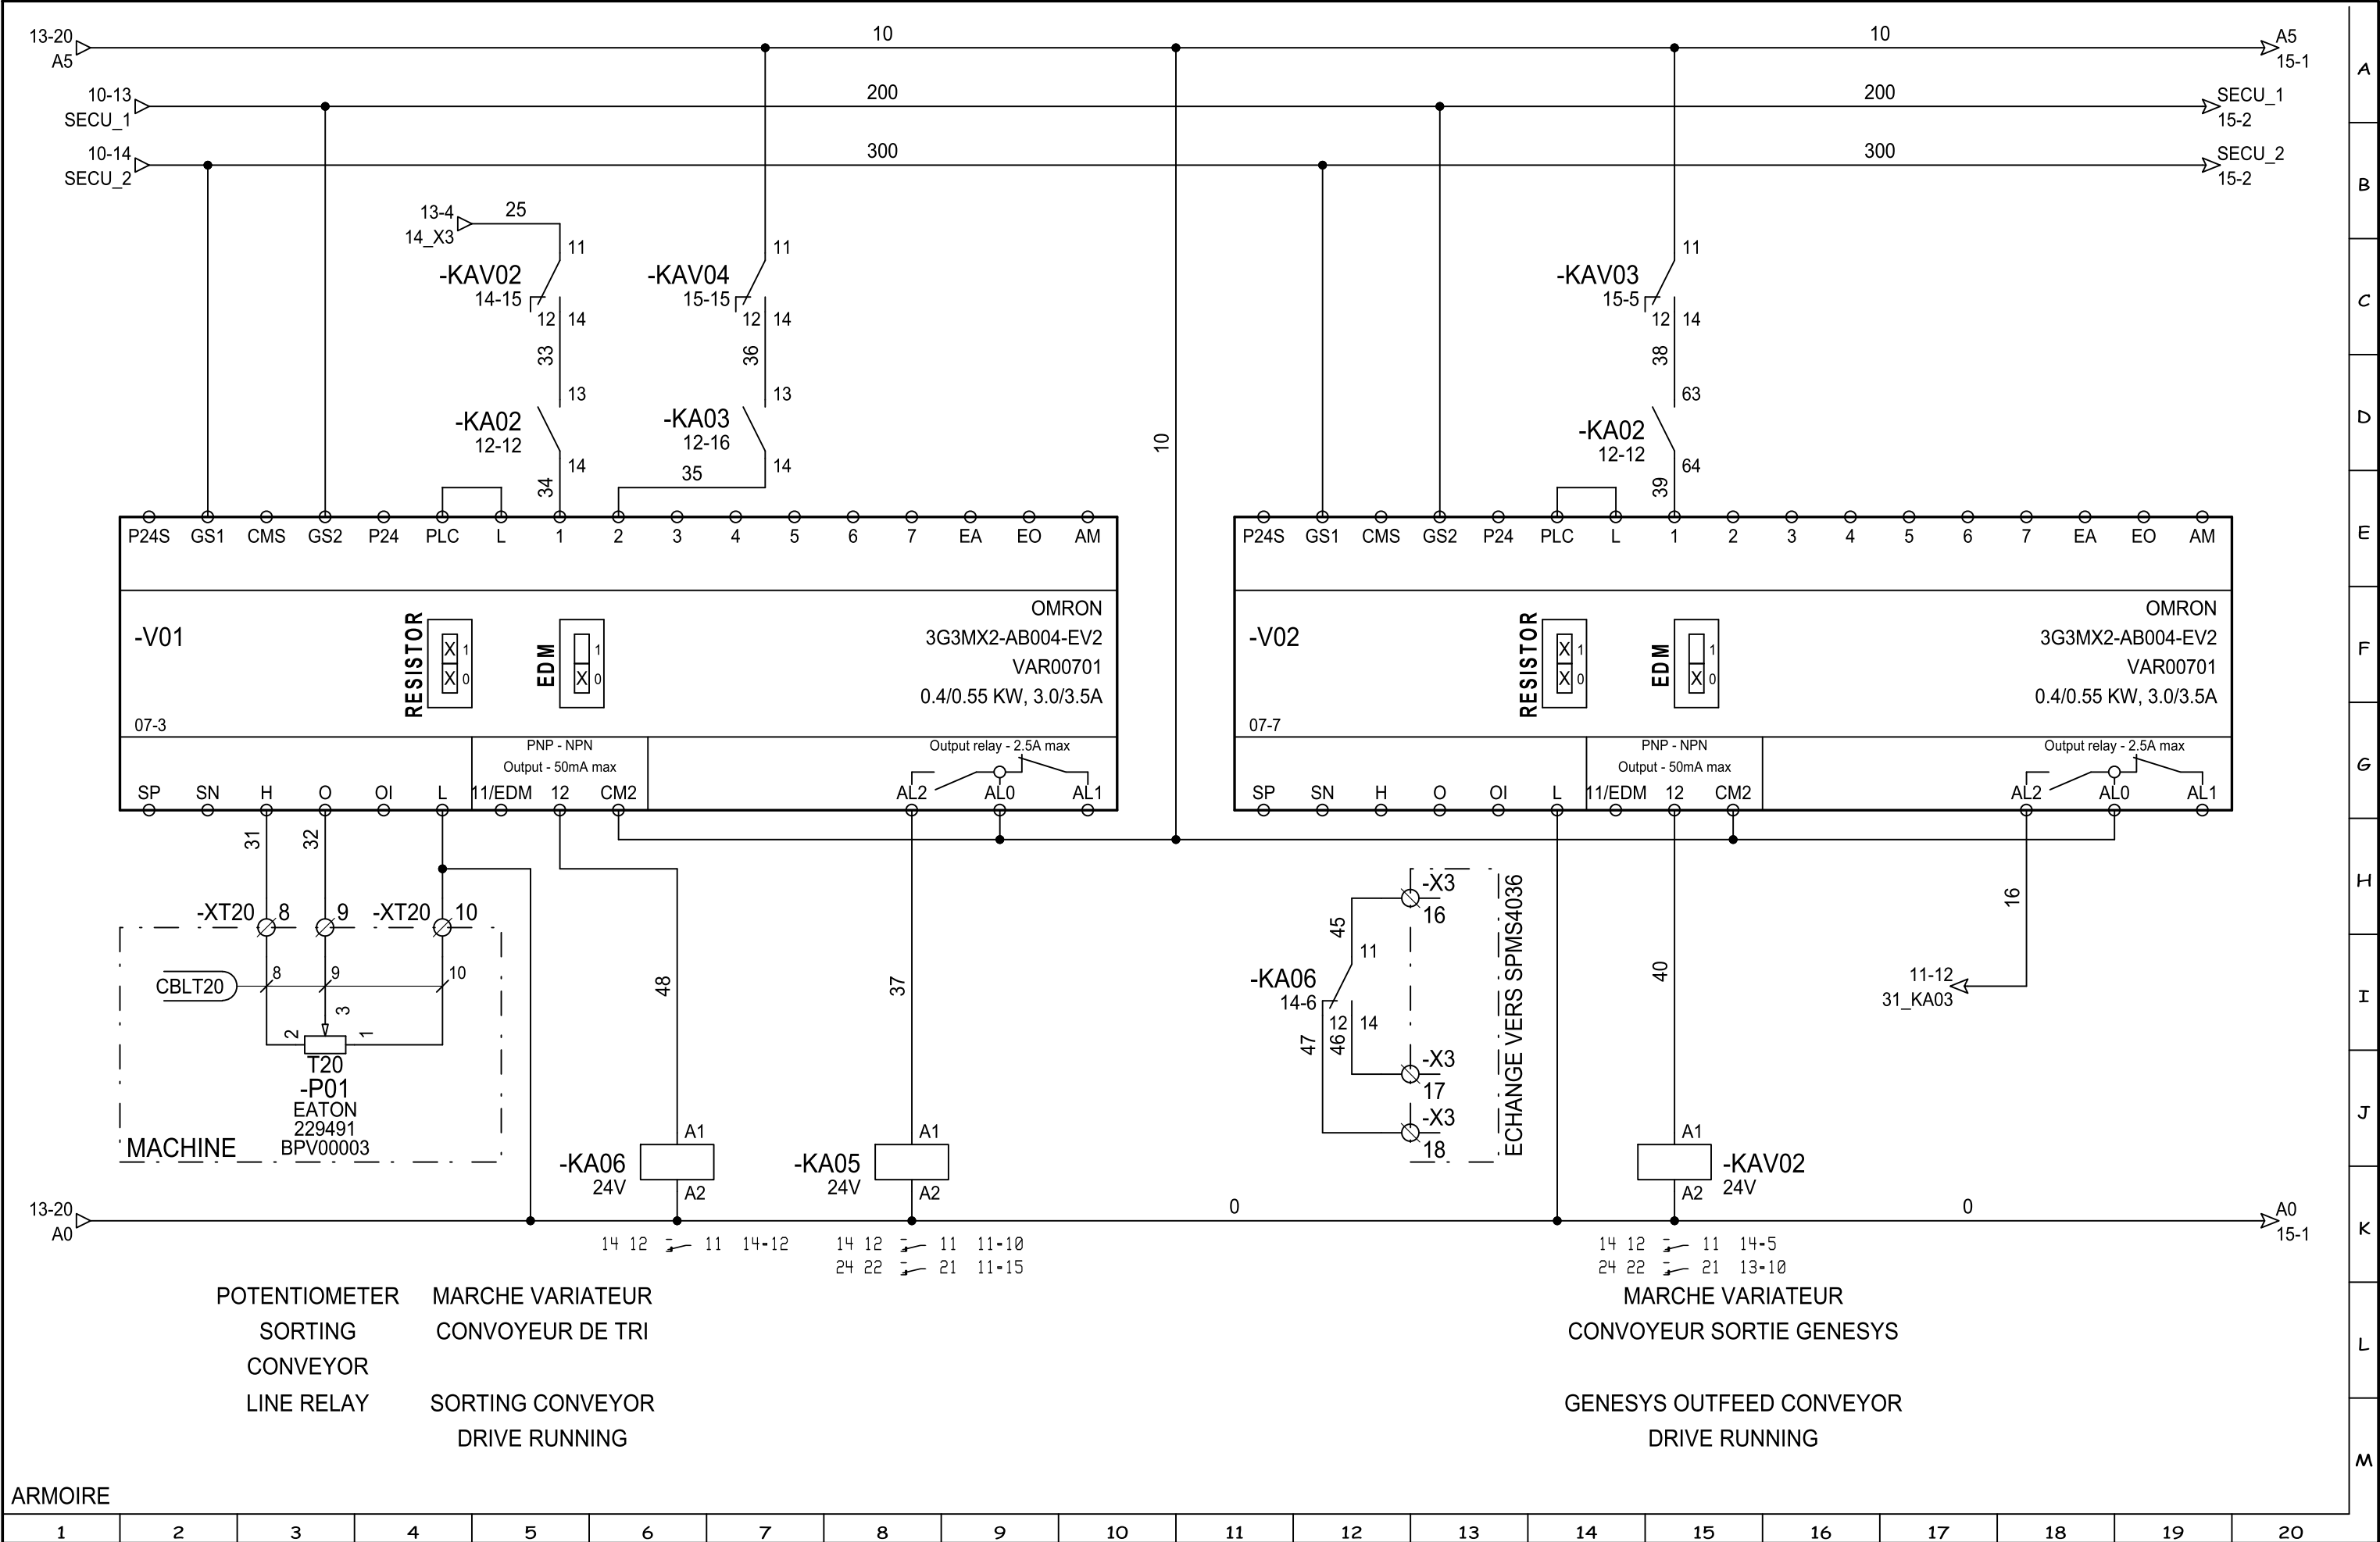


THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

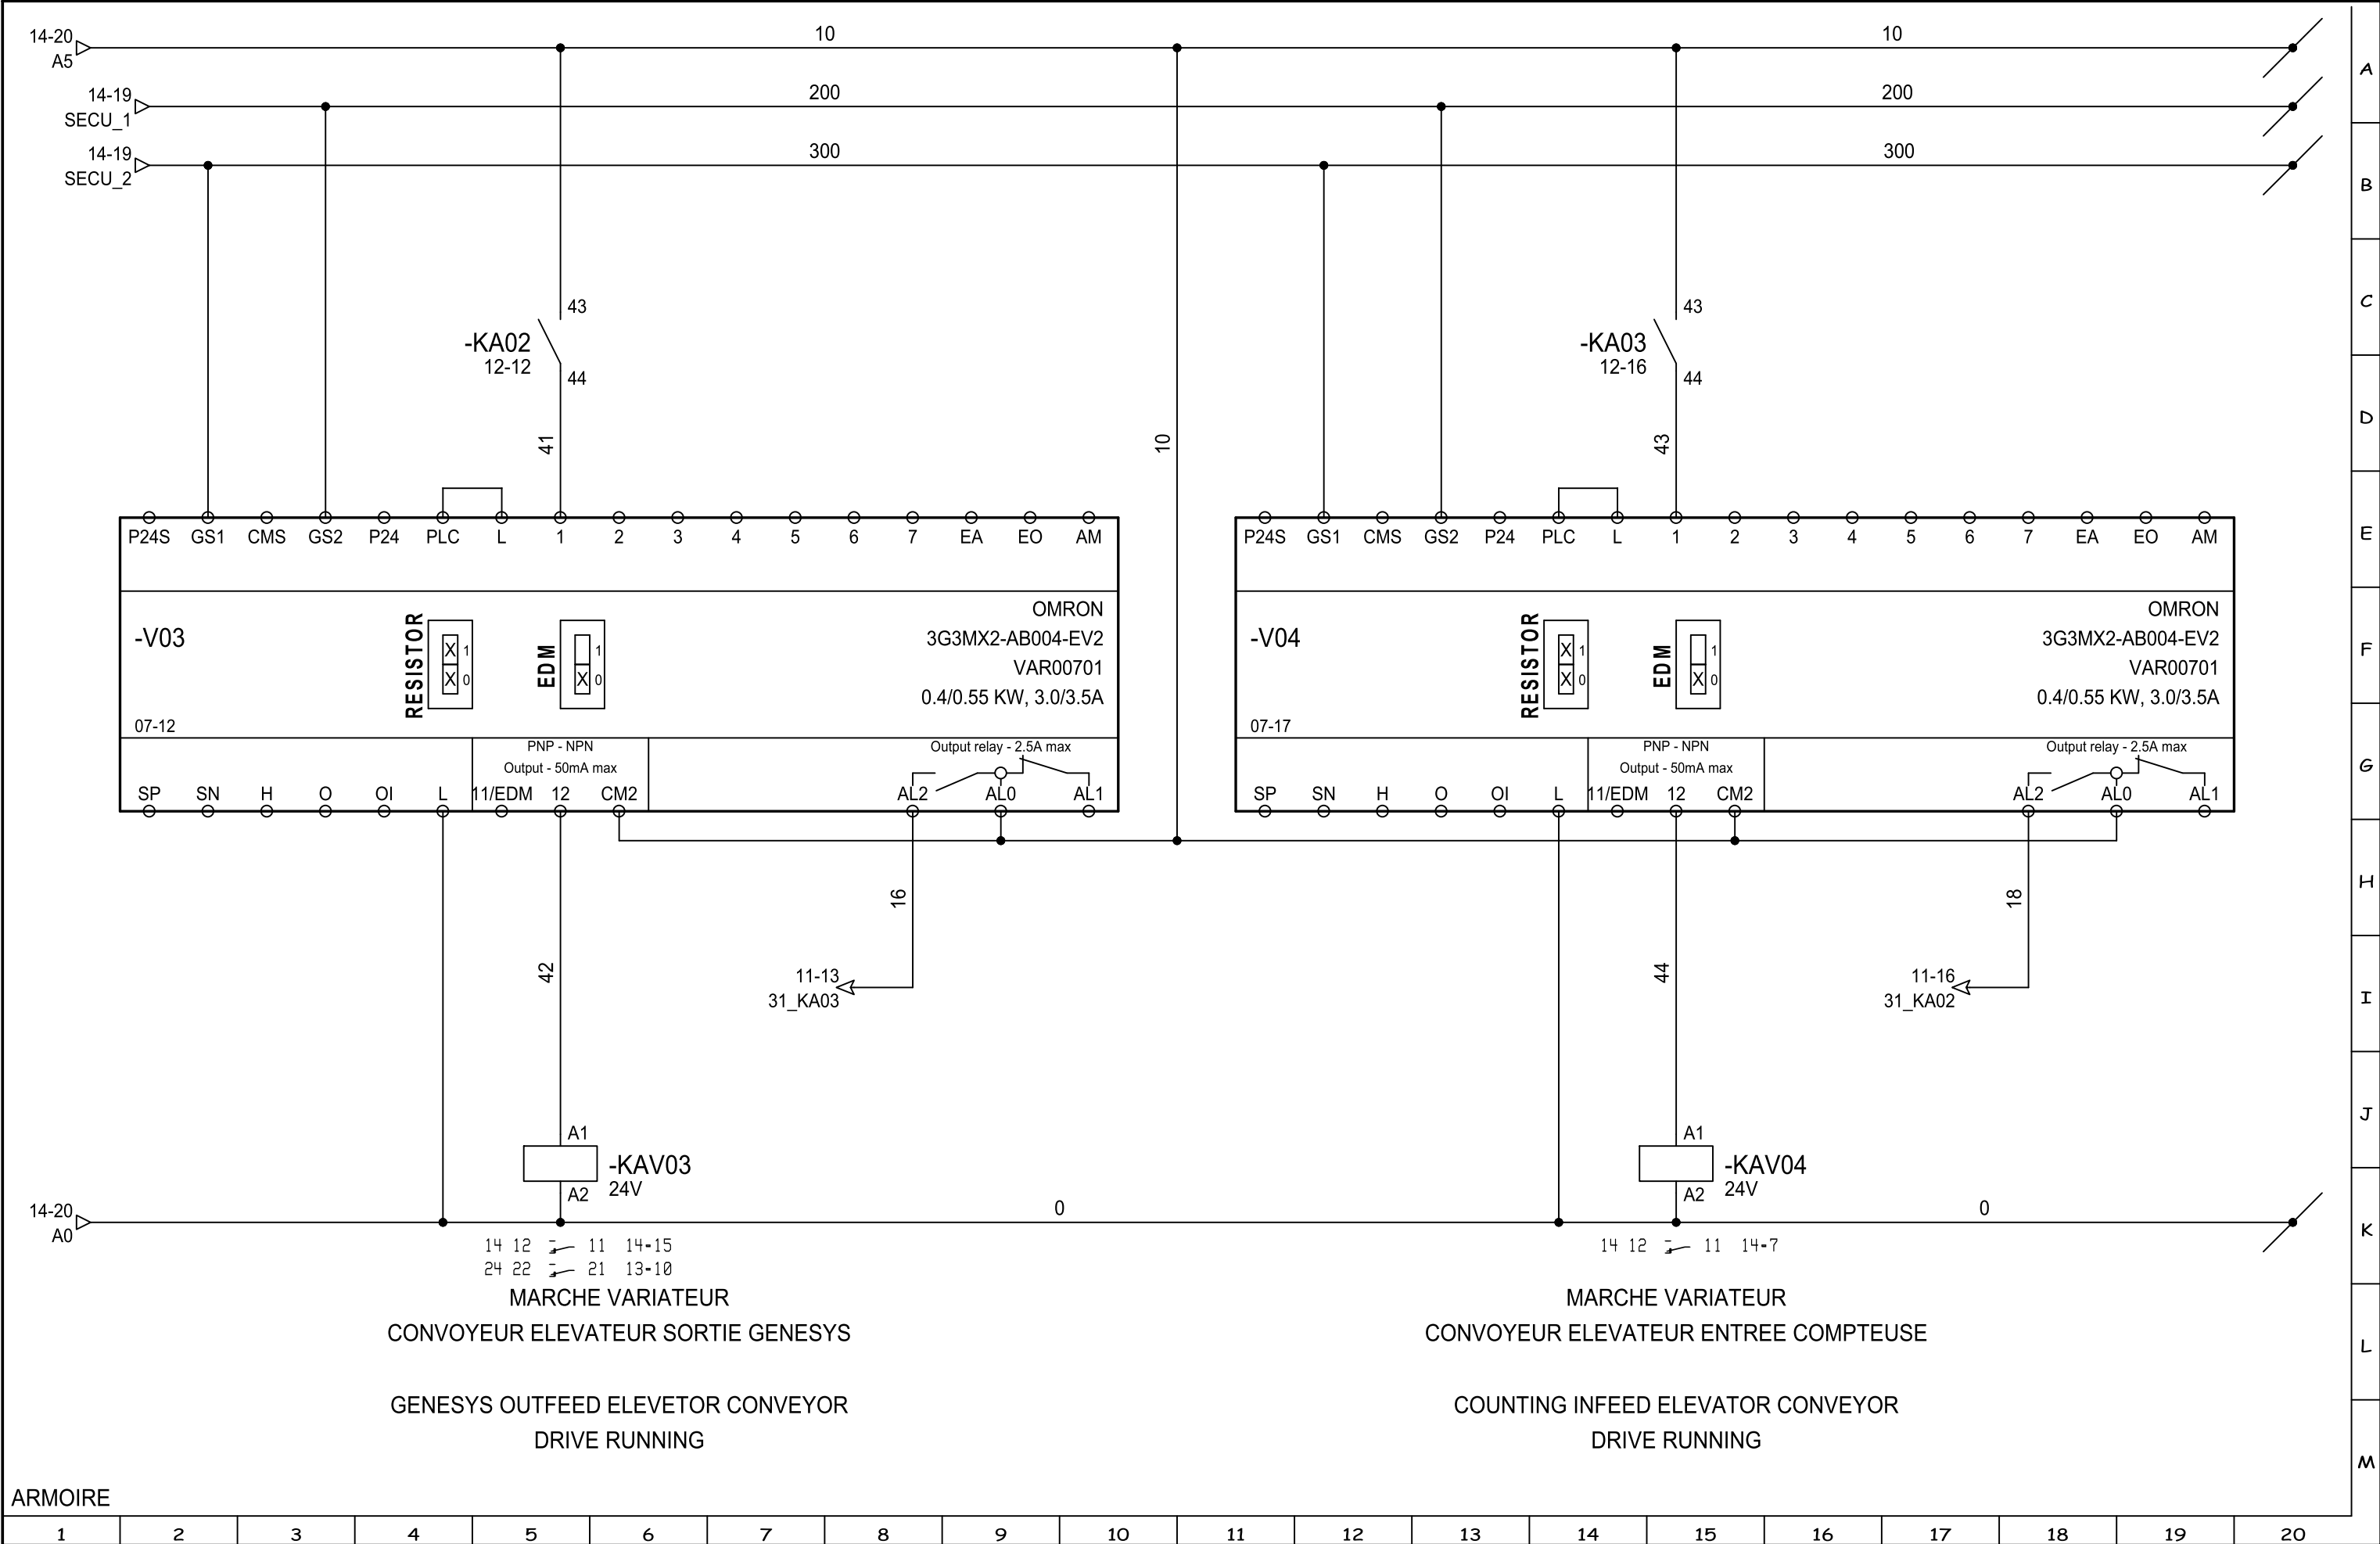

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

BORNIER DE PUISSANCE : XP0
POWER TERMINAL BLOCK : XP0

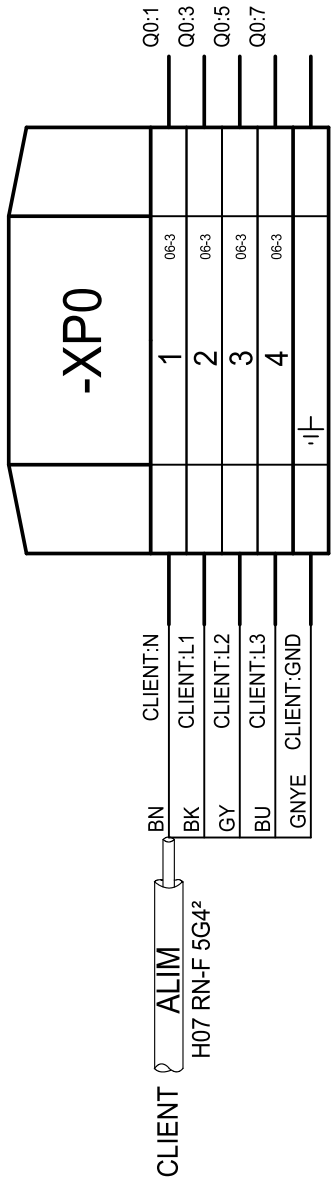


ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		BORNIER : XP0				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		TERMINAL BLOCK : XP0								ARTICLE : SMXA-C014471-OPT1				INDEX : V1	
			E-mail : ecaticid.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATID								FOLIO : 16/38					

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.


BORNIER DE COMMANDE : X2
CONTROL TERMINAL BLOCK : X2

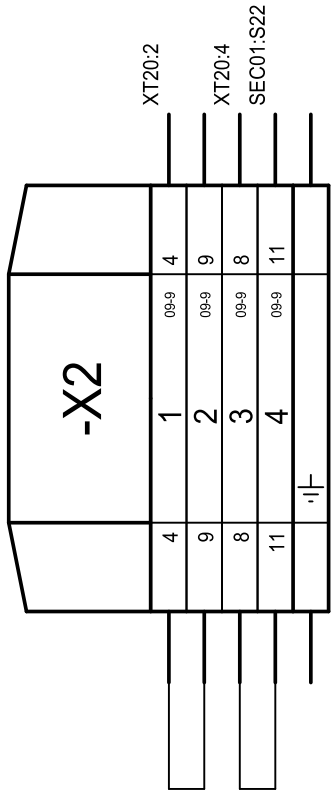

ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36 Fax : (33).2.98.85.31.38 E-mail : ecaticid.service@ceva.com			Date of creation : 10/02/2025		BORNIER : X2				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
						Designed by : DB		TERMINAL BLOCK : X2								ARTICLE : SMXA-C014471-OPT1		INDEX : V1			
								ENVIRONNEMENT : Elec_IEC V5R2_ECATICID										FOLIO : 17/38			

BORNIER DE COMMANDE : X3
CONTROL TERMINAL BLOCK : X3

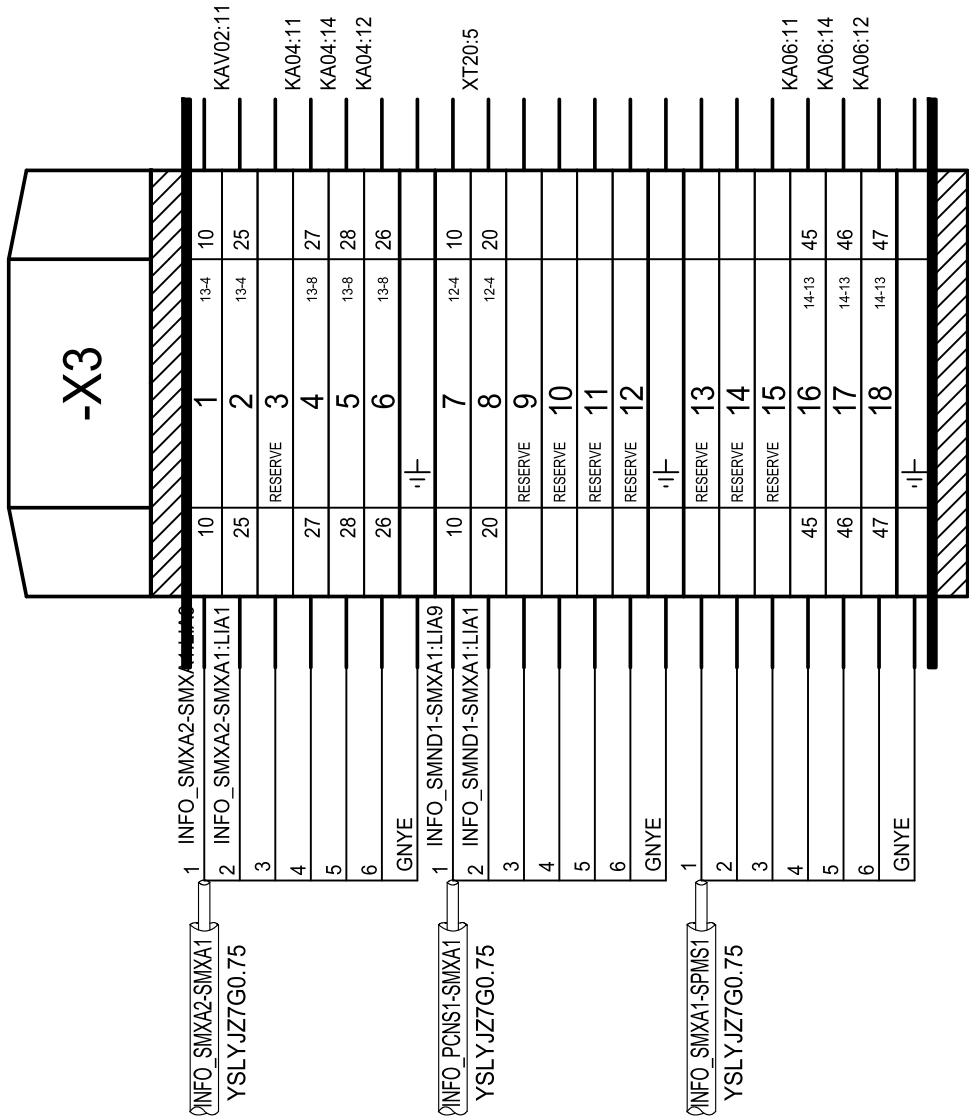

ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		BORNIER : X3			 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		TERMINAL BLOCK : X3							ARTICLE : SMXA-C014471-OPT1		INDEX : V1			
			E-mail : ecatic.service@ceva.com					ENVIRONNEMENT : Elec_IEC V5R2_ECATID						FOLIO : 18/38					

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

BOX02031
220x100x90
ARMOIRE

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36
Fax : (33).2.98.85.31.38
E-mail : ecaticid.service@ceva.com

Date of creation :
10/02/2025
Designed by :
DB

BORNIER : XT20
TERMINAL BLOCK : XT20
ENVIRONNEMENT : Elec_IEC V5R2_ECATICID




Ecat-iD Campus

CONTRACT :
C01447
CUSTOMER :
IBERAVI
ARTICLE :
SMXA-C014471-OPT1

COUNTRY :
ESPAGNE
INDEX :
V1
FOLIO :
19/38

BORNIER DE COMMANDE : XT20
CONTROL TERMINAL BLOCK : XT20

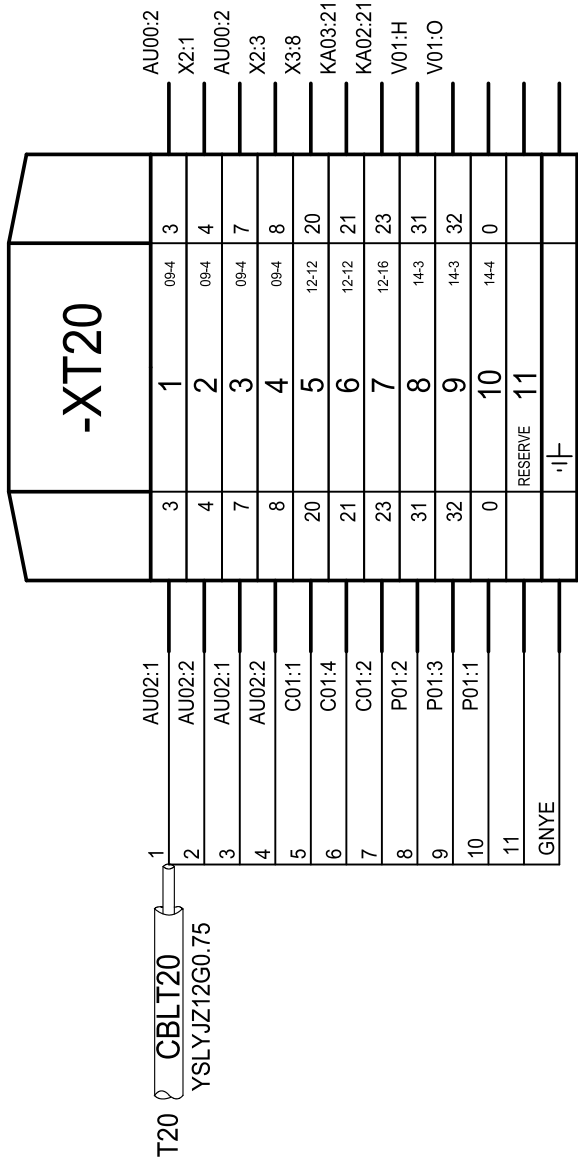

A
B
C
D
E
F
G
H
I
J
K
L
M

ECAT-ID

Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33) 2.98.85.31.36

Fax : (33) 2.98.85.31.38

E-mail : ecatid.service@ceva.com

Date of creation :
10/02/2025

Designed by :
DB

IMPLANTATION FACADE ARMOIRE

CABINET FRONT LAYOUT

ENVIRONNEMENT : Elec_IEC V6R2_ECATID



Ecat-ID Campus

CONTRACT :
C01447

CUSTOMER :
IBERAVI

COUNTRY :
ESPAGNE

INDEX :
V1


ARTICLE :
SMXA-C014471-0PT1

FOLIO :
20/38

ARMOIRE

IMPLANTATION FACADE ARMOIRE

CABINET FRONT LAYOUT


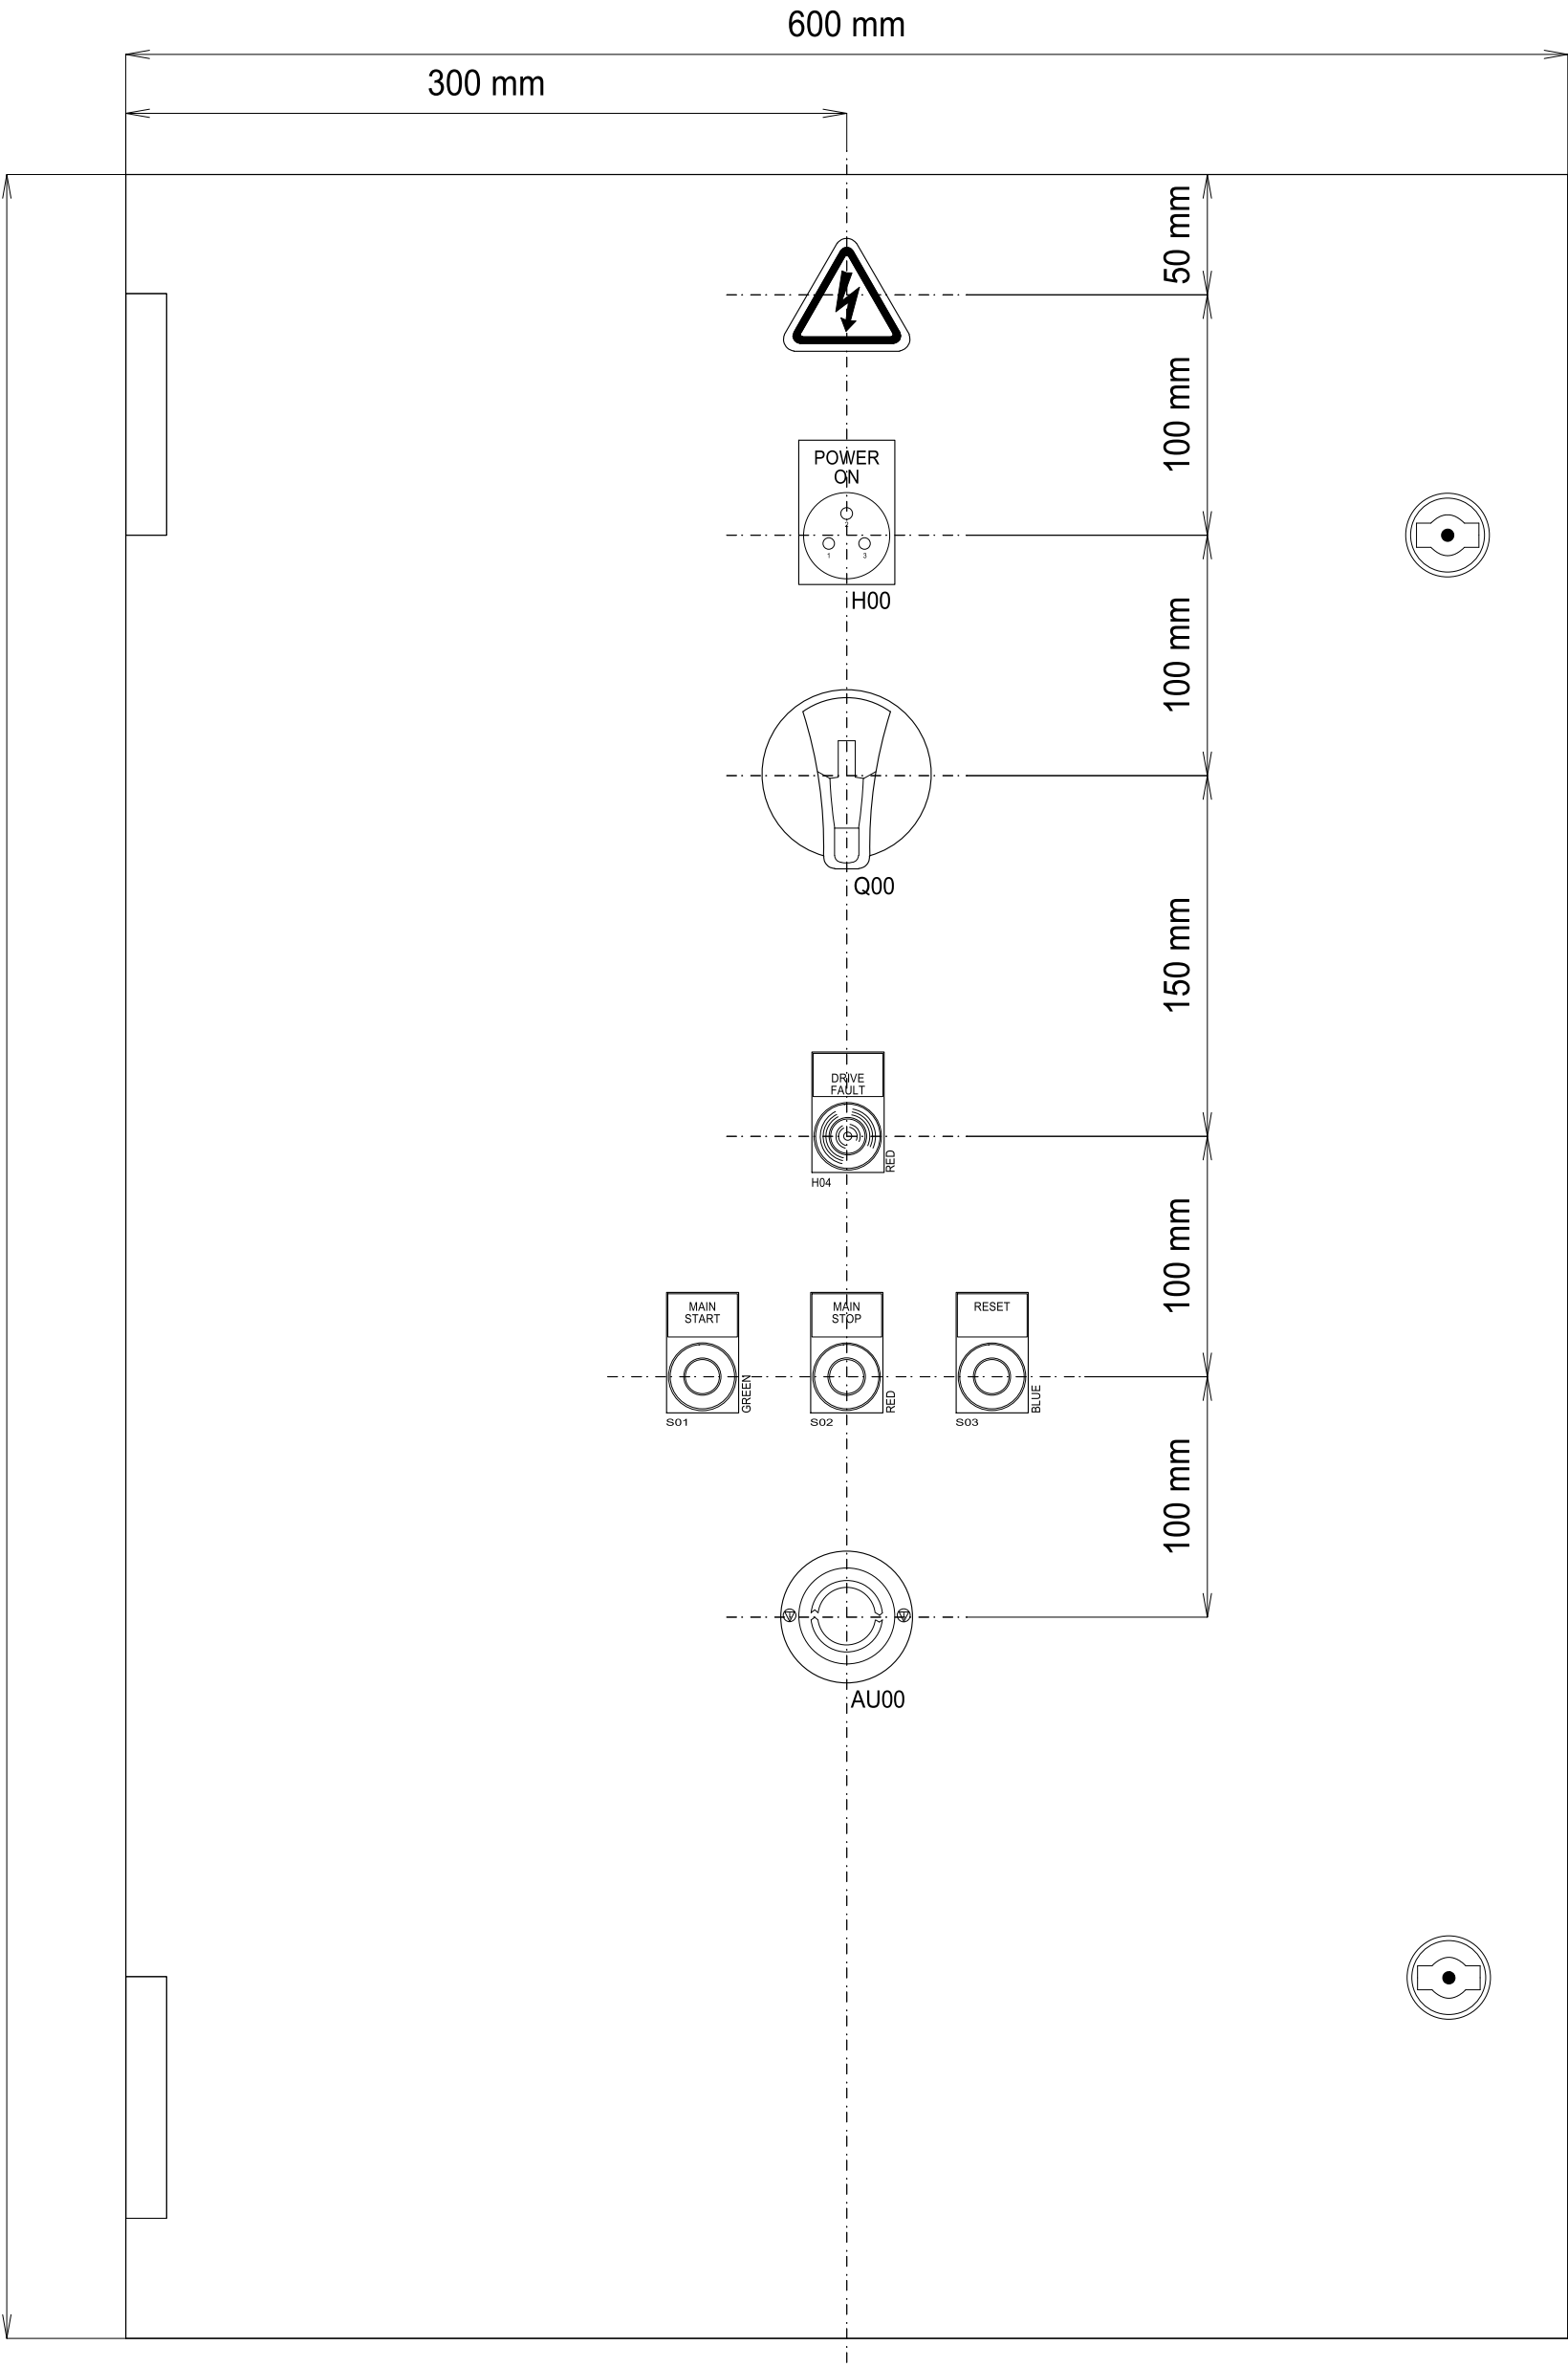


ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33) 2.98.85.31.36 Fax : (33) 2.98.85.31.38 E-mail : ecatid.service@ceva.com		Date of creation : 10/02/2025 Designed by : DB	IMPLANTATION COTE ARMOIRE	 Ecat-id Campus	CONTRACT : C01447	CUSTOMER : IBERAVI	COUNTRY : ESPAGNE
							ARTICLE : SMXA-C014471-0PT1		INDEX : V1	
							FOLIO : 21/38			

ARMOIRE

IMPLANTATION COTE ARMOIRE

CABINET SIDE LAYOUT

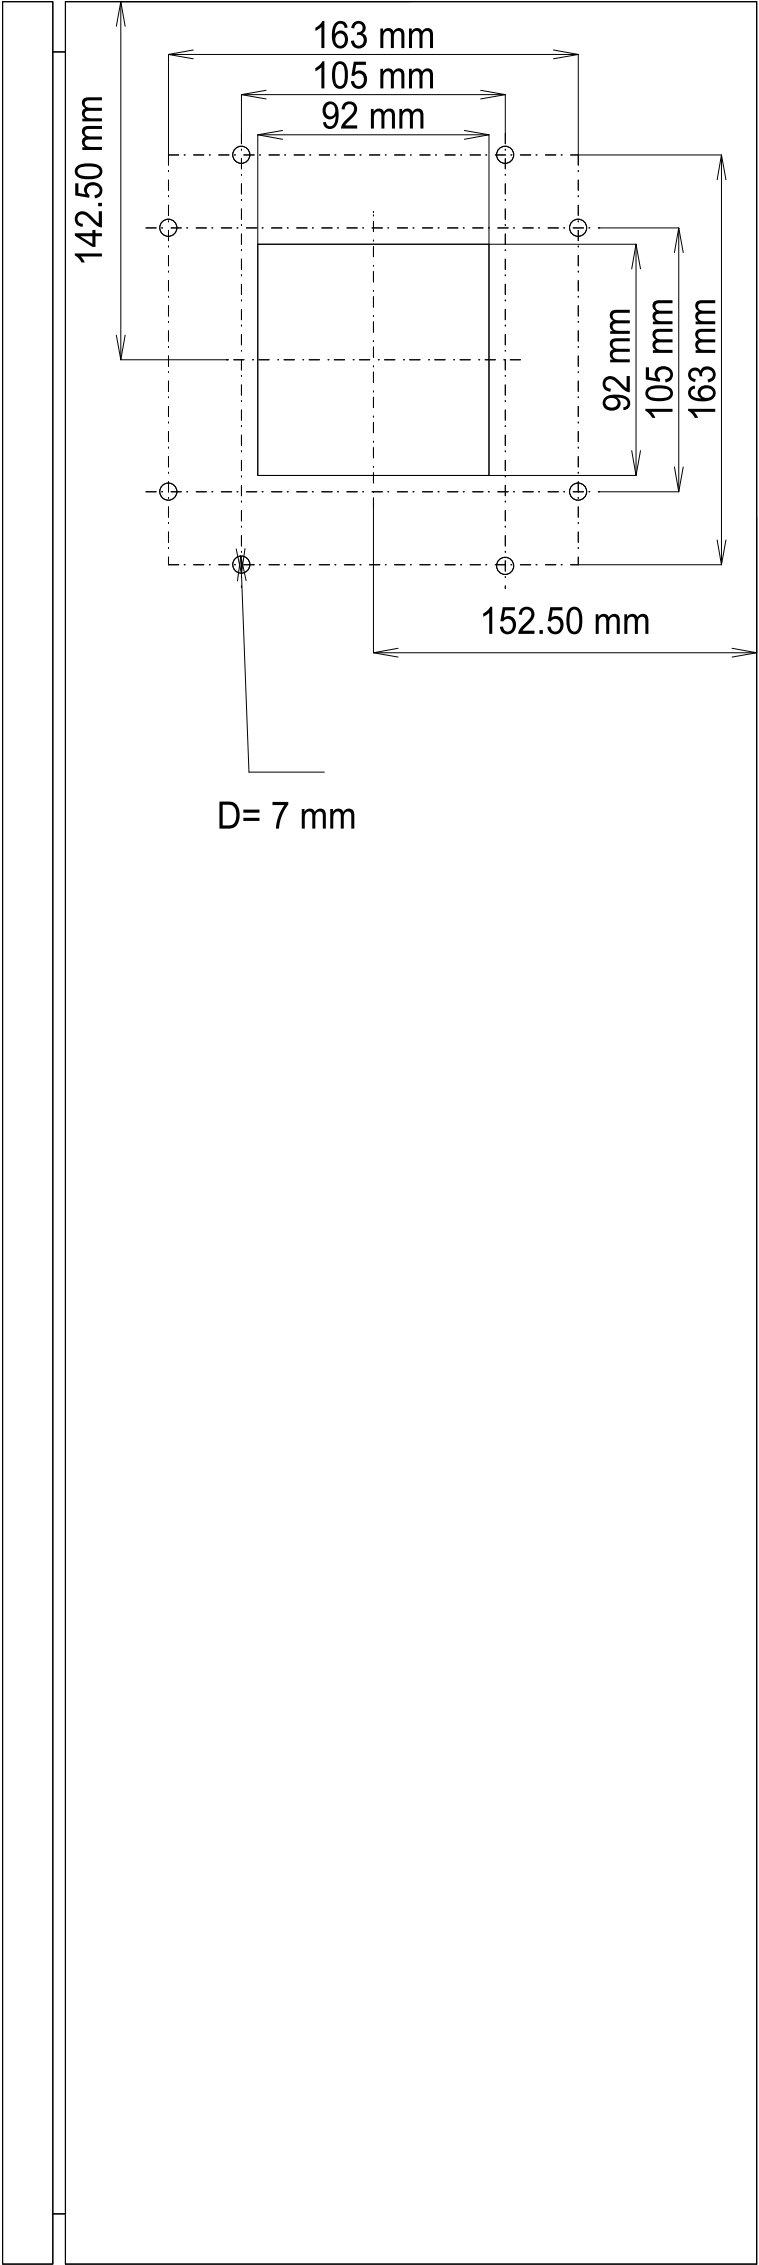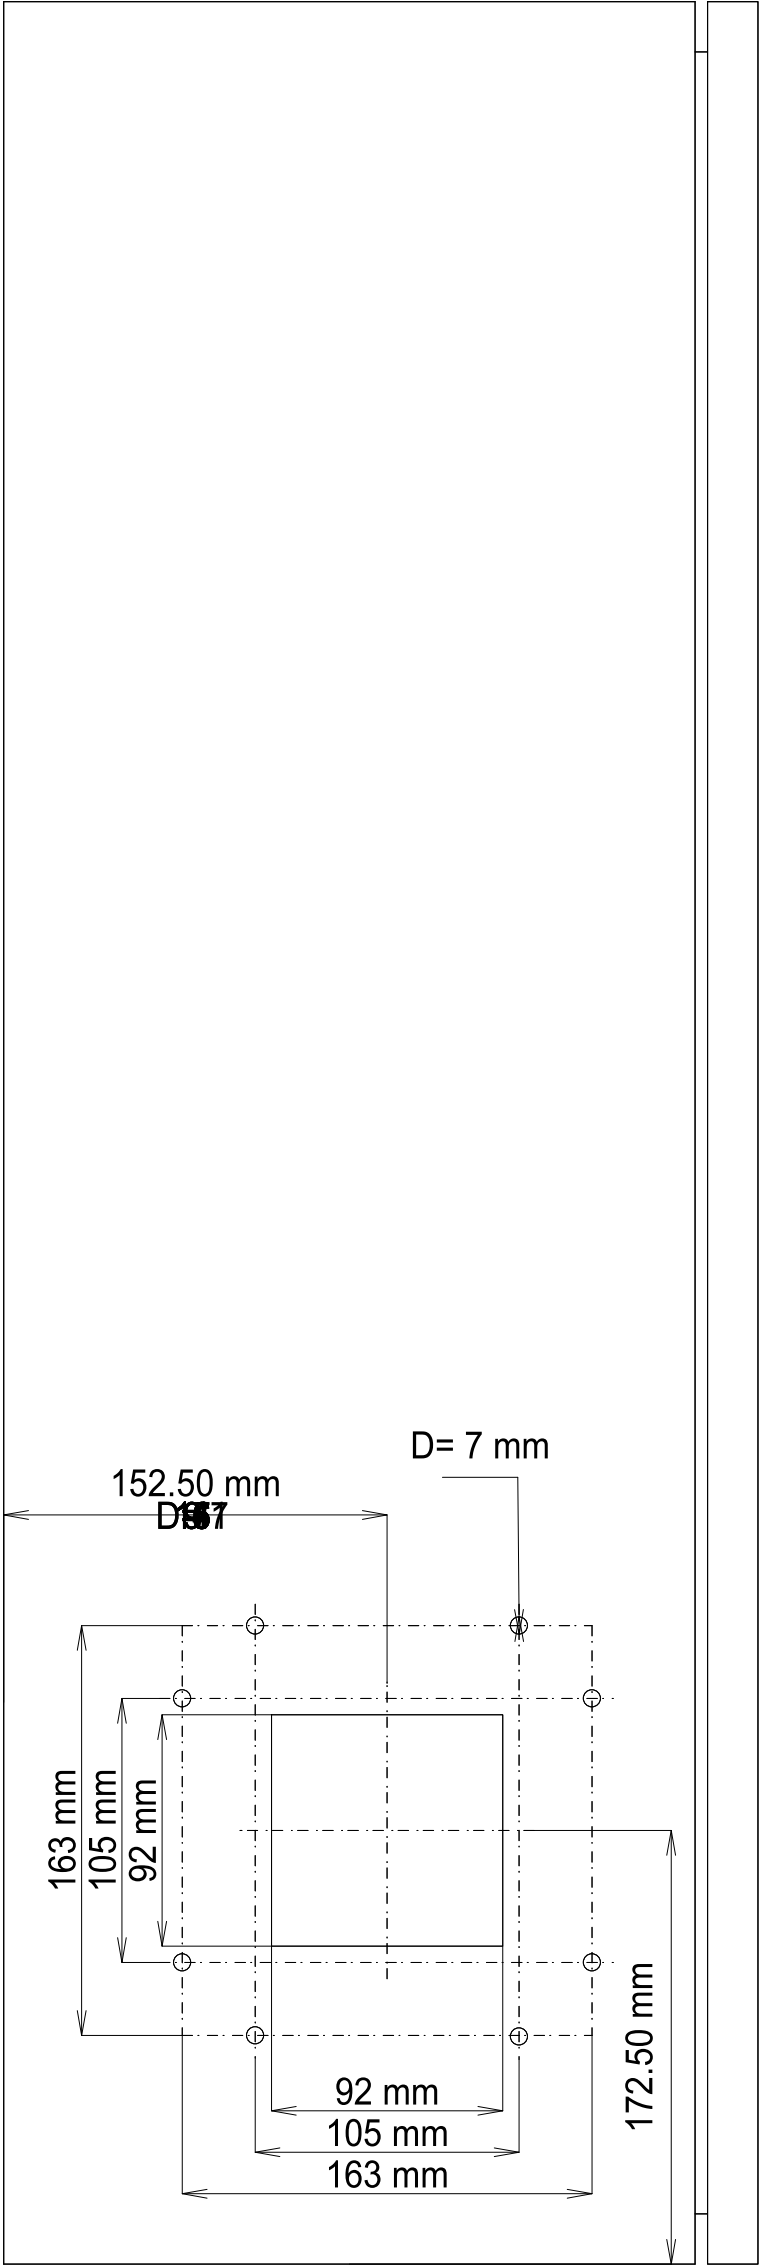

IMPLANTATION PLATINE ARMOIRE

CABINET BOARD LAYOUT

ARMOIRE

ECAT-ID

Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33) 2.98.85.31.36
Fax : (33) 2.98.85.31.38
E-mail : ecatid.service@ceva.com

Date of creation :
10/02/2025
Designed by :
DB

IMPLANTATION PLATINE ARMOIRE
CABINET BOARD LAYOUT
ENVIRONNEMENT : Elec_IEC V5R2_ECATTID




CONTRACT :
C01447
CUSTOMER :
IBERAVI

ARTICLE :
SMXA-C014471-0PT1

COUNTRY :
ESPAGNE


INDEX :
V1
FOLIO :
22/38

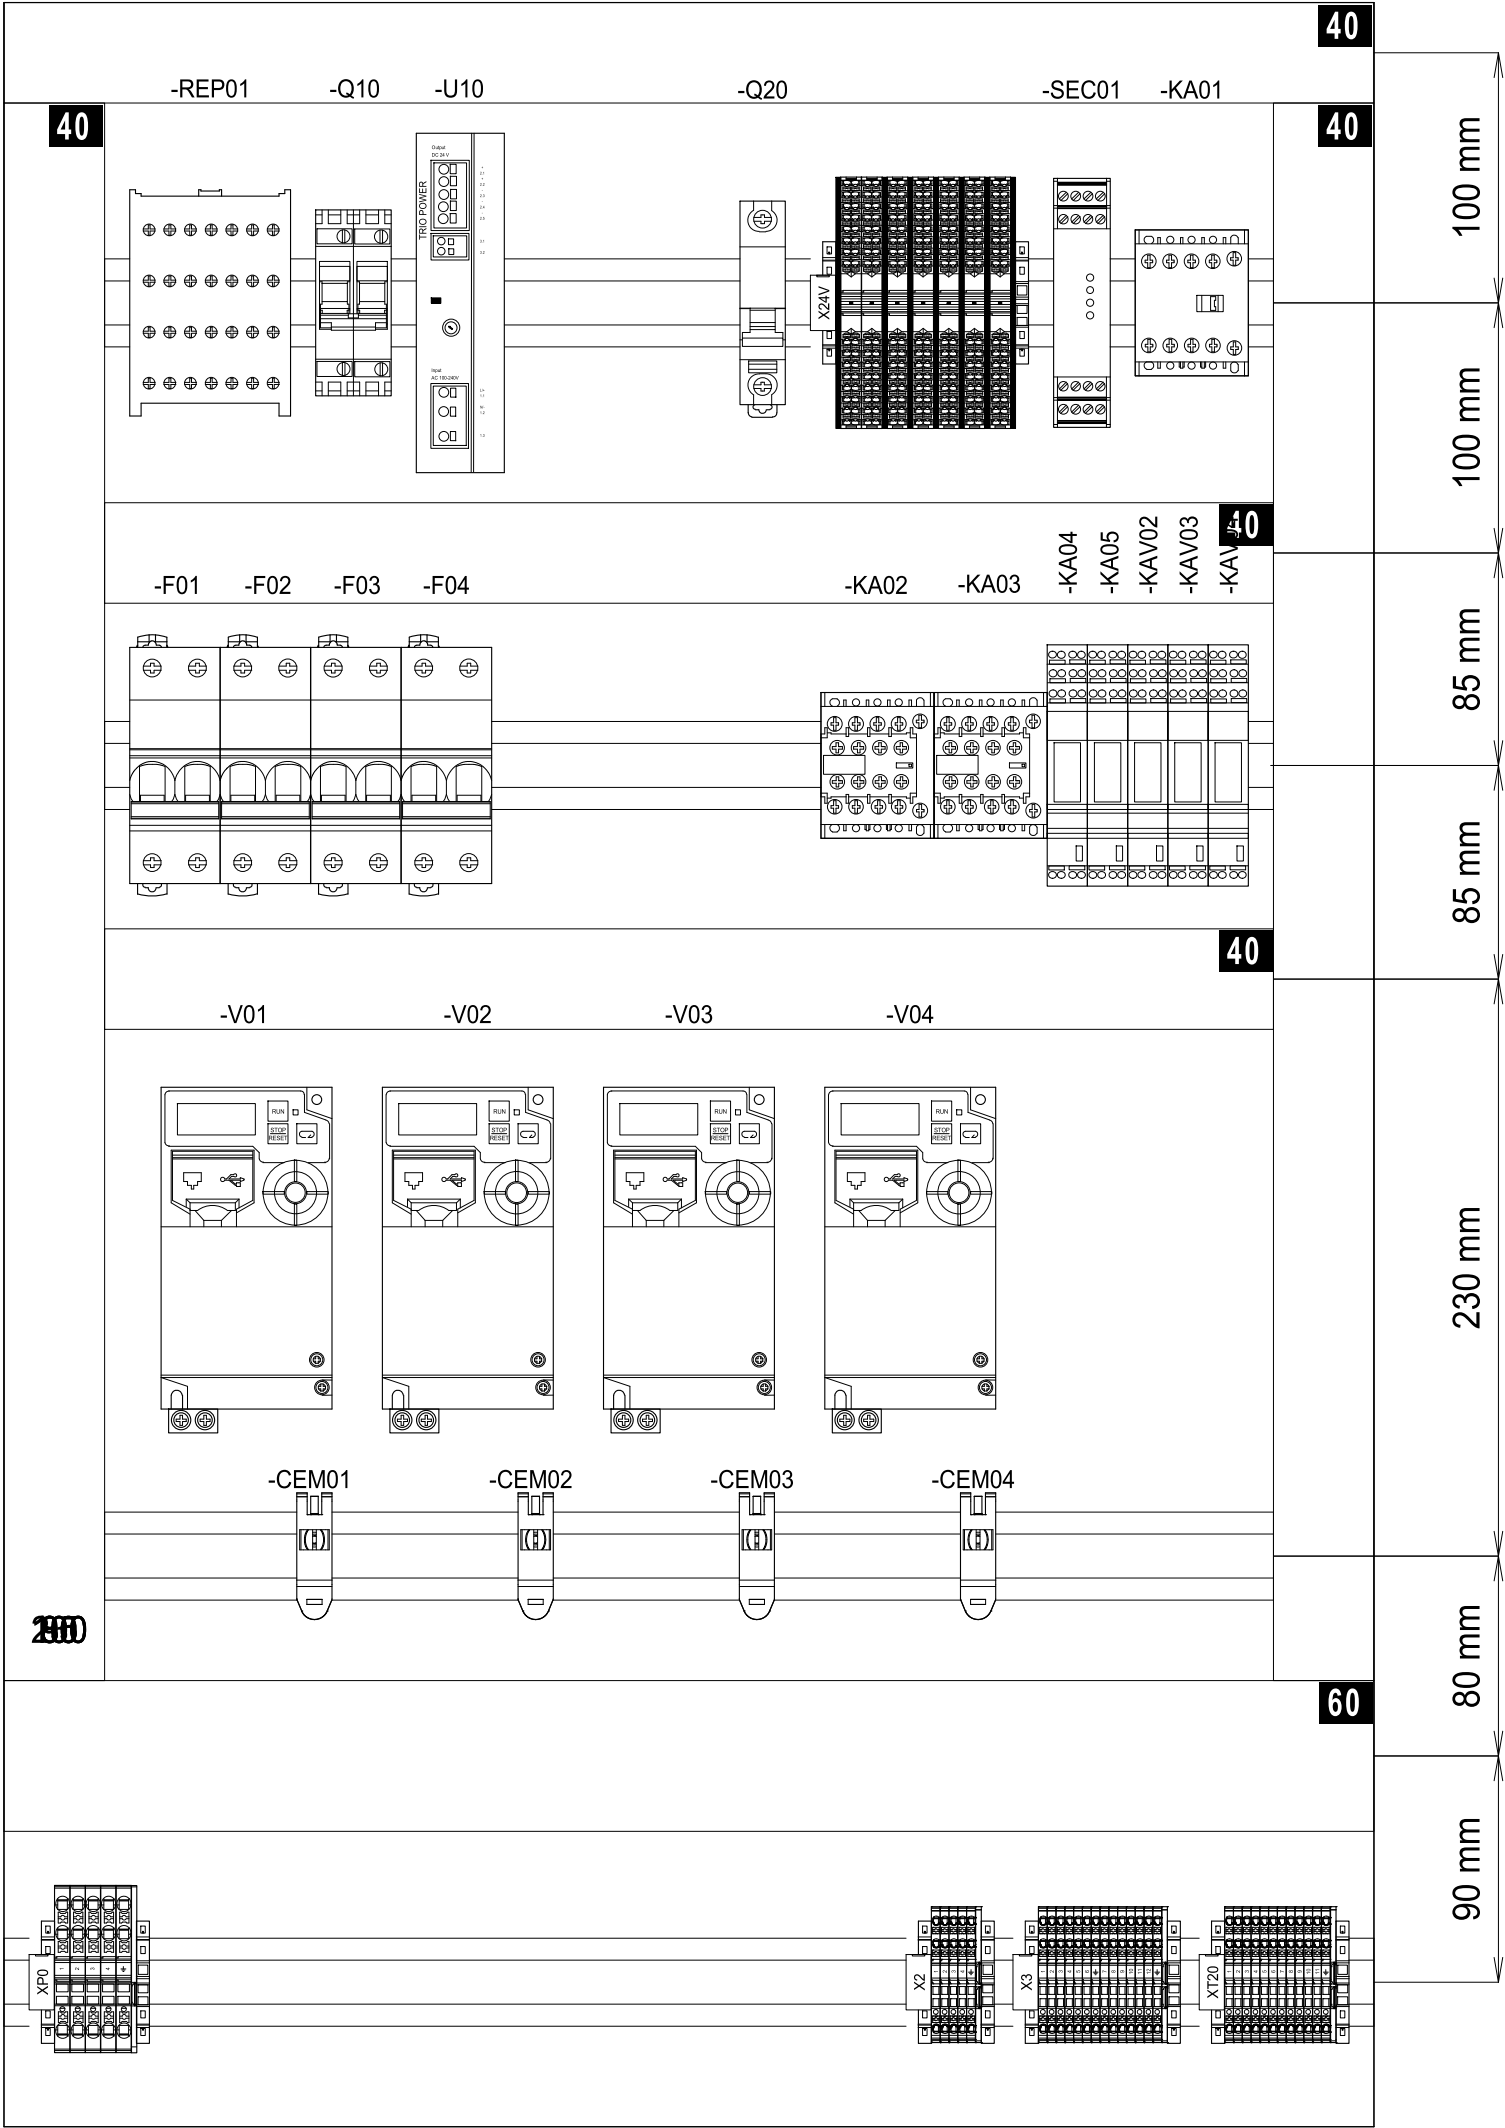

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

IMPLANTATION FACADE BOITIER T20

T20 BOX FRONT LAYOUT

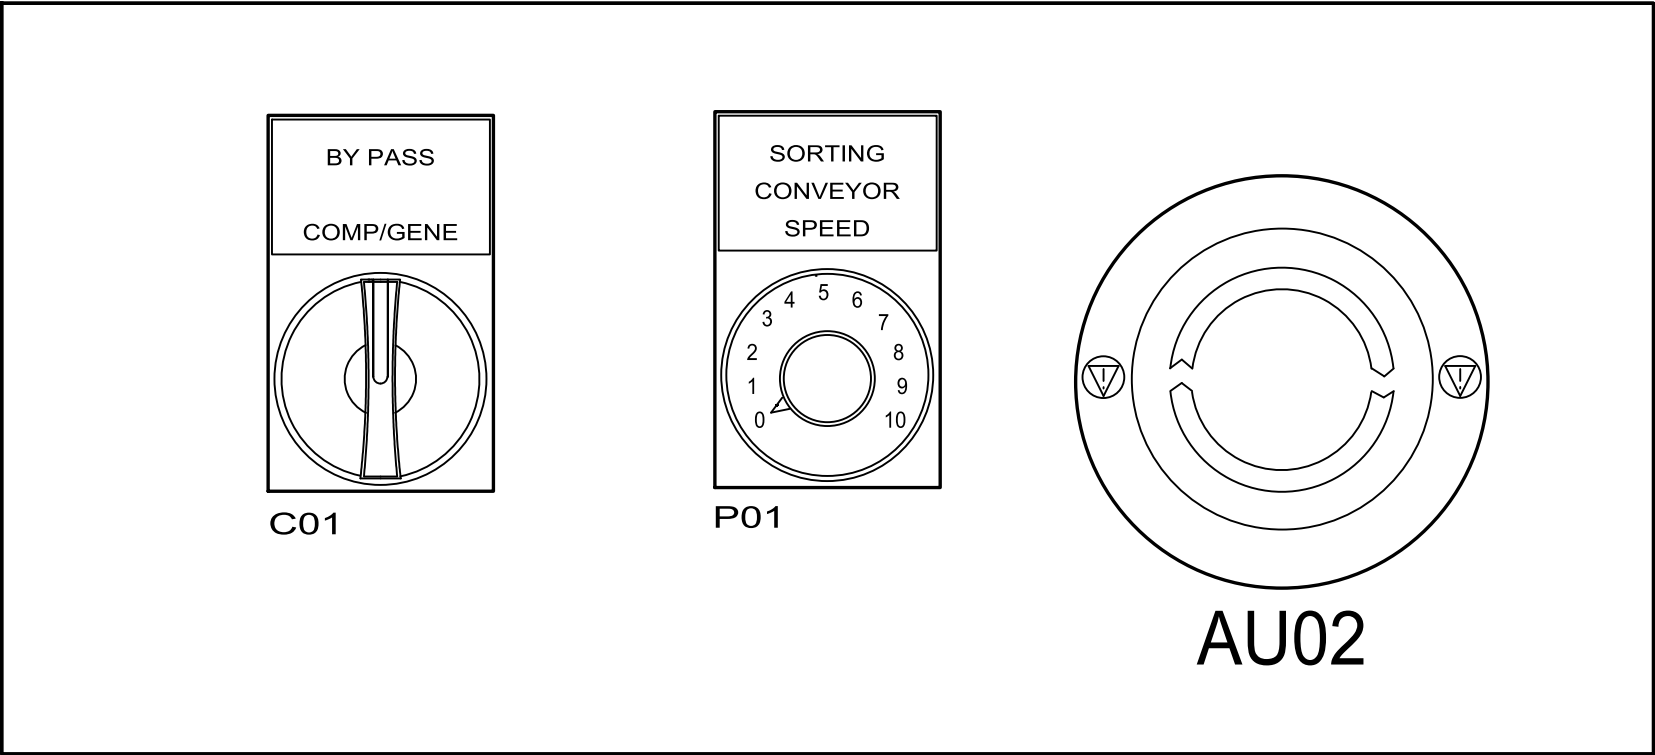

BOX02031
220x100x90
T20

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36

Fax : (33).2.98.85.31.38

E-mail : ecatid.service@ceva.com

Date of creation :
10/02/2025

Designed by :
DB

IMPLANTATION FACADE BOITIER T20

T20 BOX FRONT LAYOUT

ENVIRONNEMENT : Elec_IEC V5R2_ECATID



Ecat-iD Campus

CONTRACT :

C01447

CUSTOMER :

IBERAVI

COUNTRY :

ESPAGNE

ARTICLE :

SMXA-C014471-OPT1

INDEX : V1


FOLIO :

23/38

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

IMPLANTATION PRESSE-ETOUPE BOITIER T20

T20 BOX CABLE GLAND LAYOUT

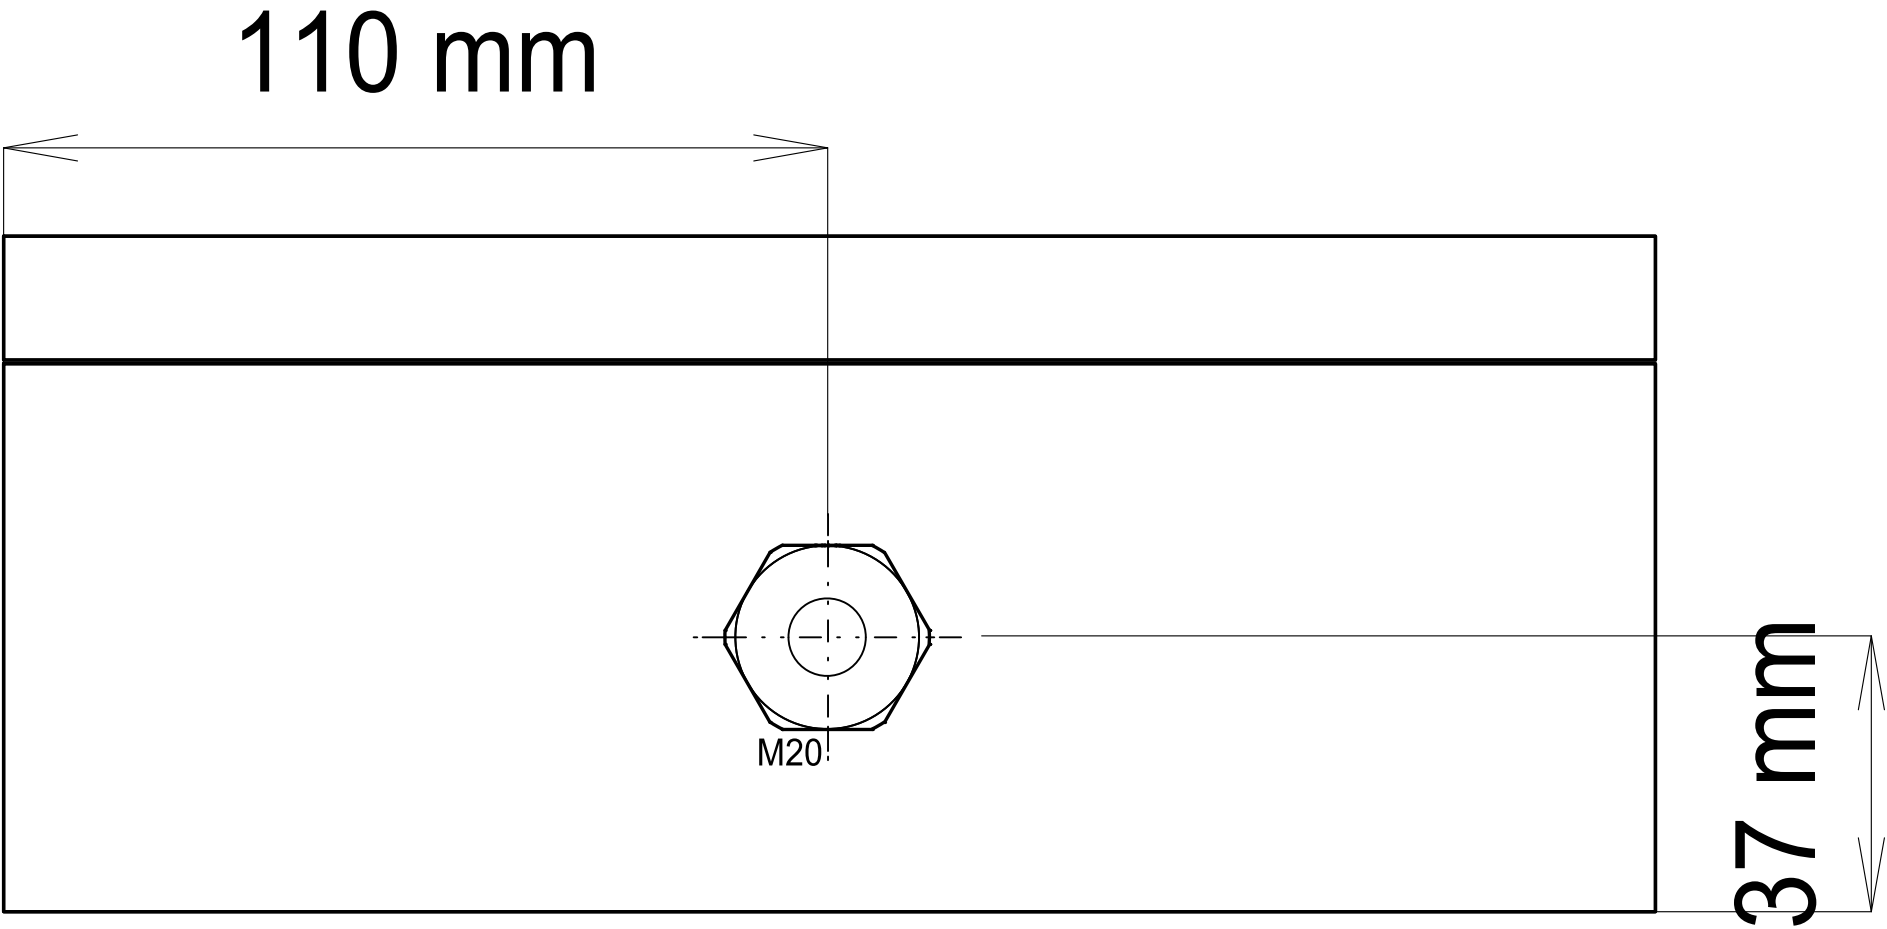

BOX02031
220x100x90
T20

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36
Fax : (33).2.98.85.31.38
E-mail : ecatid.service@ceva.com

Date of creation : 10/02/2025	IMPLANTATION PRESSE-ETOUPE BOITIER
Designed by : DB	T20 BOX CABLE GLAND LAYOUT
ENVIRONNEMENT : Elec_IEC V5R2_ECATID	



CONTRACT : C01447	CUSTOMER : IBERAVI	COUNTRY : ESPAGNE
ARTICLE : SMXA-C014471-OPT1		INDEX : V1
		FOLIO : 24/38

OMRON - Paramètres variateur
Sans frein / Avec potentiomètre

/\ Risque de court-circuit : Switch de gauche à mettre en haut (PNP) /\

Paramètre	Valeur	Modif.	Paramètre	Valeur	Modif.
B031 - Code pour modification parametres	0		F003 - Decélération	0,3	
A001 - Source de Frequence	1		A092 2ème Accélération	1	
A002 - Source de commande Run	1		A093 2ème Déccélération	1	
A004 - Fréquence maximale	80		A094 Autorisation 2ème Acc/Decc	1	
A005 - Selection potentiometre	2		A095 Changement de rampe Accélération	20	
B012 - Courant Nominal	1,78		A096 Changement de rampe Déccélération	20	
C001 - Fonction Borne d'entrée n°1	0		A041 Sélection du boost de couple	1	
C002 - Fonction Borne d'entrée n°2	1		A046 Gain de tension du boost auto	100	
C003 - Fonction Borne d'entrée n°3	NO		A047 Gain de glissement du boost auto	100	
C004 - Fonction Borne d'entrée n°4	NO				
C005 - Fonction Borne d'entrée n°5	NO				
C006 - Fonction Borne d'entrée n°6	2				
C007 - Fonction Borne d'entrée n°7	3				
C013 - Etat actif de la borne d'entrée n°3	1				
C014 - Etat actif de la borne d'entrée n°4	1				
A011 - Plage de fréquence mini par entrée ana	20				
A012 - Plage de fréquence maxi par entrée ana	60				
F002 - Accélération	0,2				

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

Repère	V02	07-7	OMRON - Paramètres variateur Sans frein / Sans potentiomètre
Caractéristiques	0.4/0.55 KW, 3.0/3.5A		
Référence fournisseur	3G3MX2-AB004-EV2		
Code interne	VAR00701		

Paramètre	Valeur	Modif.	Paramètre	Valeur	Modif.
B031 - Code pour modification parametres	0		A023 - 4ème vitesse présélectionnée	65	
A001 - Source de Frequence	2		A024 - 5ème vitesse présélectionnée	80	
A002 - Source de commande Run	1		F002 - Accélération	0,2	
A004 - Fréquence maximale	80		F003 - Decélération	0,7	
A005 - Selection potentiometre	2		A092 2ème Accélération	0,8	
B012 - Courant Nominal	1,78		A093 2ème Déccélération	0,3	
C001 - Fonction Borne d'entrée n°1	0		A094 Autorisation 2ème Acc/Decc	1	
C002 - Fonction Borne d'entrée n°2	1		A095 Changement de rampe Accélération	20	
C003 - Fonction Borne d'entrée n°3	NO		A096 Changement de rampe Déccélération	20	
C004 - Fonction Borne d'entrée n°4	NO		A041 Sélection du boost de couple	1	
C005 - Fonction Borne d'entrée n°5	NO		A046 Gain de tension du boost auto	100	
C006 - Fonction Borne d'entrée n°6	2		A047 Gain de glissement du boost auto	100	
C007 - Fonction Borne d'entrée n°7	3				
C013 - Etat actif de la borne d'entrée n°3	1				
C014 - Etat actif de la borne d'entrée n°4	1				
A020 - Petite vitesse	20				
A021 - 2ème vitesse présélectionnée	60				
A022 - 3ème vitesse présélectionnée	50				

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36

Fax : (33).2.98.85.31.38

E-mail : ecatid.service@ceva.com

Date of creation :
10/02/2025

Designed by :
DB

PARAMETRE VARIATEUR V02

DRIVE PARAMETERS V02

ENVIRONNEMENT : Elec_IEC V5R2_ECATID



Ecat-iD Campus

CONTRACT :

C01447

CUSTOMER :

IBERAVI

COUNTRY :

ESPAGNE

ARTICLE :

SMXA-C014471-OPT1

INDEX :

V1

FOLIO :

26/38

Repère	V03	07-12	OMRON - Paramètres variateur Sans frein / Sans potentiomètre
Caractéristiques	0.4/0.55 KW, 3.0/3.5A		
Référence fournisseur	3G3MX2-AB004-EV2		
Code interne	VAR00701		

Paramètre	Valeur	Modif.	Paramètre	Valeur	Modif.
B031 - Code pour modification parametres	0		A023 - 4ème vitesse présélectionnée	65	
A001 - Source de Frequence	2		A024 - 5ème vitesse présélectionnée	80	
A002 - Source de commande Run	1		F002 - Accélération	0,2	
A004 - Fréquence maximale	80		F003 - Decélération	0,7	
A005 - Selection potentiometre	2		A092 2ème Accélération	0,8	
B012 - Courant Nominal	1,3		A093 2ème Déccélération	0,3	
C001 - Fonction Borne d'entrée n°1	0		A094 Autorisation 2ème Acc/Decc	1	
C002 - Fonction Borne d'entrée n°2	1		A095 Changement de rampe Accélération	20	
C003 - Fonction Borne d'entrée n°3	NO		A096 Changement de rampe Déccélération	20	
C004 - Fonction Borne d'entrée n°4	NO		A041 Sélection du boost de couple	1	
C005 - Fonction Borne d'entrée n°5	NO		A046 Gain de tension du boost auto	100	
C006 - Fonction Borne d'entrée n°6	2		A047 Gain de glissement du boost auto	100	
C007 - Fonction Borne d'entrée n°7	3				
C013 - Etat actif de la borne d'entrée n°3	1				
C014 - Etat actif de la borne d'entrée n°4	1				
A020 - Petite vitesse	20				
A021 - 2ème vitesse présélectionnée	60				
A022 - 3ème vitesse présélectionnée	50				

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

Repère	V04	07-17	OMRON - Paramètres variateur Sans frein / Sans potentiomètre
Caractéristiques	0.4/0.55 KW, 3.0/3.5A		
Référence fournisseur	3G3MX2-AB004-EV2		
Code interne	VAR00701		

Paramètre	Valeur	Modif.	Paramètre	Valeur	Modif.
B031 - Code pour modification parametres	0		A023 - 4ème vitesse présélectionnée	65	
A001 - Source de Frequence	2		A024 - 5ème vitesse présélectionnée	80	
A002 - Source de commande Run	1		F002 - Accélération	0,2	
A004 - Fréquence maximale	80		F003 - Decélération	0,7	
A005 - Selection potentiometre	2		A092 2ème Accélération	0,8	
B012 - Courant Nominal	1,3		A093 2ème Déccélération	0,3	
C001 - Fonction Borne d'entrée n°1	0		A094 Autorisation 2ème Acc/Decc	1	
C002 - Fonction Borne d'entrée n°2	1		A095 Changement de rampe Accélération	20	
C003 - Fonction Borne d'entrée n°3	NO		A096 Changement de rampe Déccélération	20	
C004 - Fonction Borne d'entrée n°4	NO		A041 Sélection du boost de couple	1	
C005 - Fonction Borne d'entrée n°5	NO		A046 Gain de tension du boost auto	100	
C006 - Fonction Borne d'entrée n°6	2		A047 Gain de glissement du boost auto	100	
C007 - Fonction Borne d'entrée n°7	3				
C013 - Etat actif de la borne d'entrée n°3	1				
C014 - Etat actif de la borne d'entrée n°4	1				
A020 - Petite vitesse	20				
A021 - 2ème vitesse présélectionnée	60				
A022 - 3ème vitesse présélectionnée	50				

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36

Fax : (33).2.98.85.31.38

E-mail : ecatid.service@ceva.com

Date of creation :
10/02/2025

Designed by :
DB

PARAMETRE VARIATEUR V04

DRIVE PARAMETERS V04

ENVIRONNEMENT : Elec_IEC V5R2_ECATID



Ecat-iD Campus

CONTRACT :

C01447

CUSTOMER :

IBERAVI

COUNTRY :

ESPAGNE

ARTICLE :

SMXA-C014471-OPT1

INDEX :

V1

FOLIO :

28/38

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

REPERE	FOLIO	DESIGNATION	QTE	REFERENCE	CODE ECAT-ID	FABRICANT	FILTRE
ARMOIRE	01	COFFRET INOX 900x600x300	1	013110830	BOX00310	IRINOX	ARMOIRE
ARMOIRE	01	BOITE DE DERIVATION 100x220x90, INOX AISI 304, IP69K 3 BP	1	SPN10229	BOX02031	MP GAMMA	ARMOIRE
CEM01	07	BRIDE CEM SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
CEM02	07	BRIDE CEM SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
CEM03	07	BRIDE CEM SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
CEM04	07	BRIDE CEM SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
F01	07	DISJONCTEUR IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, COURBE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
F02	07	DISJONCTEUR IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, COURBE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
F03	07	DISJONCTEUR IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, COURBE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
F04	07	DISJONCTEUR IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, COURBE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
KA01	11	CONTACTEUR AUXILIAIRE 3F/1O VIS 24VDC	1	CA3KN31BD	REL00051	SCHNEIDER ELECTRIC	ARMOIRE
KA01	11	BLOC VARISTOR 12-24V	1	LA4KE1B	REL00124	SCHNEIDER ELECTRIC	ARMOIRE
KA02	12	CONTACTEUR AUXILIAIRE 2F/2O VIS 24VDC	1	CA3KN22BD	REL00052	SCHNEIDER ELECTRIC	ARMOIRE
KA02	12	ADDITIF 4F VIS	1	LA1KN40	REL00086	SCHNEIDER ELECTRIC	ARMOIRE
KA02	12	BLOC VARISTOR 12-24V	1	LA4KE1B	REL00124	SCHNEIDER ELECTRIC	ARMOIRE
KA03	12	CONTACTEUR AUXILIAIRE 2F/2O VIS 24VDC	1	CA3KN22BD	REL00052	SCHNEIDER ELECTRIC	ARMOIRE
KA03	12	ADDITIF 4F VIS	1	LA1KN40	REL00086	SCHNEIDER ELECTRIC	ARMOIRE
KA03	12	BLOC VARISTOR 12-24V	1	LA4KE1B	REL00124	SCHNEIDER ELECTRIC	ARMOIRE
KA04	13	RELAIS RIFLINE 2 CONTACT	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KA05	14	RELAIS RIFLINE 2 CONTACT	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KA06	14	RELAIS RIFLINE 2 CONTACT	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KAV02	14	RELAIS RIFLINE 2 CONTACT	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KAV03	15	RELAIS RIFLINE 2 CONTACT	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KAV04	15	RELAIS RIFLINE 2 CONTACT	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
Q0	06	POIGNEE ROUGE IP65 POUR CDE EXTERIEURE FRONTALE ET LATERALE DROITE SIRCO M	1	14741111	SEC00042	SOCOMEK	ARMOIRE
Q0	06	POLE ADDITIONNEL PRINCIPAL SIRCO M 20A	1	22001001	SEC00031	SOCOMEK	ARMOIRE
Q0	06	INTERRUPTEUR-SECTIONNEUR SIRCO M 3x20A NU	1	22003001	SEC00024	SOCOMEK	ARMOIRE
Q0	06	CACHE-BORNES POUR SIRCO M 1P 16...40A	1	22941005	SEC00070	SOCOMEK	ARMOIRE
Q0	06	CACHE-BORNES POUR SIRCO M 3P 16...40A	1	22943005	SEC00071	SOCOMEK	ARMOIRE
Q0	06	KIT DE MONTAGE SUR PORTE POUR SIRCO M, 16...80A, 3/4P	1	22993409	SEC00091	SOCOMEK	ARMOIRE
Q10	08	DISJONCTEUR MAGNETOTHERMIQUE 2P 2A	1	GB2DB07	DIS00113	SCHNEIDER ELECTRIC	ARMOIRE
Q20	08	DISJONCTEUR C60H-DC 250VDC 5A 1P C	1	A9N61505	DIS00251	SCHNEIDER ELECTRIC	ARMOIRE
REP01	06	REPARTITEUR TETRAPOLAIRE TD 80/100 A, 6 CONNEXIONS	1	563920	ELC01083	NVENT ERICO	ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		NOMENCLATURE ARMOIRE			 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		FRENCH ENCLOSURE PART LIST							ARTICLE : SMXA-C014471-OPT1				INDEX : V1	
			E-mail : ecatic.service@ceva.com			ENVIRONNEMENT : Elec_IEC V5R2_ECATID			FOLIO : 29/38										

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

TAG	SHEET	DESCRIPTION	QTY	CATALOG No	CODE ECAT-ID	MANUFACTURER	FILTER
ARMOIRE	01		1	013110830	BOX00310	IRINOX	ARMOIRE
ARMOIRE	01	STAINLESS STEEL JUNCTION BOX 100X220X90 IP69K	1	SPN10229	BOX02031	MP GAMMA	ARMOIRE
CEM01	07	EMC EARTH CLAMPS SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
CEM02	07	EMC EARTH CLAMPS SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
CEM03	07	EMC EARTH CLAMPS SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
CEM04	07	EMC EARTH CLAMPS SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
F01	07	CIRCUIT BREAKER IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, CURVE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
F02	07	CIRCUIT BREAKER IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, CURVE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
F03	07	CIRCUIT BREAKER IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, CURVE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
F04	07	CIRCUIT BREAKER IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, CURVE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
KA01	11	TESYS K CONTROL RELAY 3NO+1NF 24VDC	1	CA3KN31BD	REL00051	SCHNEIDER ELECTRIC	ARMOIRE
KA01	11	SUPPRESSOR MODULE 12-24V	1	LA4KE1B	REL00124	SCHNEIDER ELECTRIC	ARMOIRE
KA02	12	TESYS K CONTROL RELAY 2NO+2NF 24VDC	1	CA3KN22BD	REL00052	SCHNEIDER ELECTRIC	ARMOIRE
KA02	12	ADDITIVE 4F SCREW	1	LA1KN40	REL00086	SCHNEIDER ELECTRIC	ARMOIRE
KA02	12	SUPPRESSOR MODULE 12-24V	1	LA4KE1B	REL00124	SCHNEIDER ELECTRIC	ARMOIRE
KA03	12	TESYS K CONTROL RELAY 2NO+2NF 24VDC	1	CA3KN22BD	REL00052	SCHNEIDER ELECTRIC	ARMOIRE
KA03	12	ADDITIVE 4F SCREW	1	LA1KN40	REL00086	SCHNEIDER ELECTRIC	ARMOIRE
KA03	12	SUPPRESSOR MODULE 12-24V	1	LA4KE1B	REL00124	SCHNEIDER ELECTRIC	ARMOIRE
KA04	13	RIFLINE 2 CONTACT RELAY	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KA05	14	RIFLINE 2 CONTACT RELAY	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KA06	14	RIFLINE 2 CONTACT RELAY	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KAV02	14	RIFLINE 2 CONTACT RELAY	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KAV03	15	RIFLINE 2 CONTACT RELAY	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
KAV04	15	RIFLINE 2 CONTACT RELAY	1	2903334	REL00082	PHOENIX CONTACT	ARMOIRE
Q0	06	EXTERNAL FRONT AND RIGHT SIDE HANDLE - SIRCO M 16-80A	1	14741111	SEC00042	SOCOMEK	ARMOIRE
Q0	06	ADDITIONAL POLE FOR SIRCO M 20A	1	22001001	SEC00031	SOCOMEK	ARMOIRE
Q0	06	SWITCH DISCONNECTOR SIRCO M 3x20A	1	22003001	SEC00024	SOCOMEK	ARMOIRE
Q0	06	TERMINAL COVER FOR SIRCO M 1P 16-40A	1	22941005	SEC00070	SOCOMEK	ARMOIRE
Q0	06	TERMINAL COVER FOR SIRCO M 3P 16-40A	1	22943005	SEC00071	SOCOMEK	ARMOIRE
Q0	06	DOOR MOUNTING KIT FOR SIRCO M, 16-80A, 3/4P	1	22993409	SEC00091	SOCOMEK	ARMOIRE
Q10	08	THERMAL-MAGNETIC CIRCUIT BREAKER 2P 2A	1	GB2DB07	DIS00113	SCHNEIDER ELECTRIC	ARMOIRE
Q20	08	MINIATURE CIRCUIT BREAKER - C60H - 1 POLE - 5 A - C CURVE	1	A9N61505	DIS00251	SCHNEIDER ELECTRIC	ARMOIRE
REP01	06	TD 80/100 A TETRAPOLAR SPLITTER, 6 CONNECTIONS	1	563920	ELC01083	NVENT ERICO	ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		NOMENCLATURE ARMOIRE ANGLAIS				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		ENGLISH ENCLOSURE PART LIST								ARTICLE : SMXA-C014471-OPT1		INDEX : V1			
			E-mail : ecatic.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATID								FOLIO : 31/38					

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		NOMENCLATURE BOUTONNERIE ANGLA				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		ENGLISH BUTTON PARTS LIST								ARTICLE : SMXA-C014471-OPT1				INDEX : V1	
			E-mail : ecatic.service@ceva.com		ENVIRONNEMENT : Elec_IEC V5R2_ECATID				FOLIO : 34/38											

[illegible]

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		CARNET DE CABLE				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		FRENCH CABLE BOOKLET								ARTICLE : SMXA-C014471-OPT1				INDEX : V1	
			E-mail : ecatid.service@ceva.com		ENVIRONNEMENT : Elec_IEC V5R2_ECATID				FOLIO : 35/38											

[illegible]

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		CARNET DE CABLE ANGLAIS				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE	
			Fax : (33).2.98.85.31.38		Designed by : DB		ENGLISH CABLE BOOKLET								ARTICLE : SMXA-C014471-OPT1				INDEX : V1	
			E-mail : ecatid.service@ceva.com		ENVIRONNEMENT : Elec_IEC V5R2_ECATID				FOLIO : 36/38											

[illegible]

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 10/02/2025		NOMENCLATURE MOTEUR ANGLAIS				 Ecat-iD Campus				CONTRACT : C01447		CUSTOMER : IBERAVI		COUNTRY : ESPAGNE			
			Fax : (33).2.98.85.31.38		Designed by : DB		MOTOR PARTS LIST								ARTICLE : SMXA-C014471-OPT1						INDEX : V1	
			E-mail : ecaticid.service@ceva.com				ENVIRONNEMENT : Elec IEC V5R2 ECATICID								FOLIO : 38/38							