

-ARMOIRE

N° Armoire :

Matière du coffret :INOX

Taille du coffret :600x600x300

Marque du coffret :IRINOX

Matière des boîtiers :INOX

Equipements utilisés :

Marque boutonnerie :SCHNEIDER ELECTRIC

Langue boutonnerie :/

Marque automate :/

Marque IHM :/

Câblage

Pouvoir de coupure Icc : 10kA

Câbles blindés sur les variateurs

Couleurs des fils :

Phase 230V : Noir24VDC : Violet

Neutre 230V : Bleu12VDC ou 15VDC : Rouge

Phase 115V : Marron5VDC : Gris

Neutre 115V : Marron bagué bleu48VDC : Jaune

Terre : Vert/Jaune0VDC : Blanc

Potentiel extérieur : Orange

Neutre extérieur : Orange bagué bleu

Caractéristiques électriques estimées

Puissance nominale totale (kW) :1kW

Courant nominal total (Amps) :4,3

Disjoncteur principal conseillé (Client)

Calibre du disjoncteur (Amps) :16A

Courbe du disjoncteur (type) :D

Section minimale du câble d'alimentation (Client) :

380V+3PH+N+GND

Section du fil (mm²) :2,5mm²

Type de câble (Nombre de fils) :5G2,5mm²H07 RNF / U1000 R2V

Le disjoncteur principal et le câble d'alimentation peuvent être différents en fonction de l'installation électrique (Matériau du câble, longueur, méthode d'installation, ...)

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID. IT IS PROVIDED ON A CONFIDENTIAL BASIS.
IT MUST NOT BE REPRODUCED OR COMMUNICATED TO THIRD PARTIES WITHOUT OUR WRITTEN AUTHORISATION.

V3	Mise a jour adressage ethercat	07/11/2025	AN		
V2	Modifications suivant rapport Apave	28/10/2025	MB		
V1	CREATION	12/09/2025	AN	JT	JT
INDEX	MODIFICATION	DATE	DESIGNED BY	VERIFIED BY	APPROVED BY

COFFRET CONVOYEUR DE SORTIE GENDER SORTING

GENDER SORTING OUTFEED CONVEYOR CABINET

DESIGNED BY : AN

VERIFIED BY : JT

DATE CREATED : 09/10/2024

CUSTOMER : GALINA MAINE

CONTRACT NO. : C01461

PROCESS N° : PDIV-C014611

ECAT-ID

Z.I DE KERIEL

29800 PLOUEDERN

FRANCE

Tel : (33).2.98.85.31.36

Fax : (33).2.98.85.31.38

E-mail : ecaticid.service@ceva.com

ENVIRONNEMENT IGE-XAO : Elec_IEC V5R2_ECATID Environment for electrical controls and automation systems (according to IEC standard)

FOLIO : 01/22

Ecat-iD Campus

COUNTRY :FRANCE

DRAWING NUMBER :SMXA-C014611-OPT2

[illegible][illegible]

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 09/10/2024		LISTE DE FOLIOS FRANCAIS				 Ecat-iD Campus				CONTRACT : C01461		CUSTOMER : GALINA MAINE		COUNTRY : FRANCE			
			Fax : (33).2.98.85.31.38		Designed by : AN		FRENCH FOLIOS LIST								ARTICLE : MXA-C014611-OPT2						INDEX : V3	
			E-mail : ecatid.service@ceva.com		ENVIRONNEMENT : Elec_IEC V5R2_ECATID				2 02/22													


THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

																				A	
																				B	
																				C	
																				D	
																				E	
																				F	
																				G	
																				H	
																				I	
																				J	
																				K	
																				L	
																				M	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE				Tél : (33).2.98.85.31.36		Date of creation : 09/10/2024		LISTE DE FOLIOS FRANCAIS				 Ecat-iD Campus				CONTRACT : C01461		CUSTOMER : GALINA MAINE		COUNTRY : FRANCE	
				Fax : (33).2.98.85.31.38		Designed by : AN		FRENCH FOLIOS LIST								ARTICLE : MXA-C014611-OPT2				INDEX : V3	
				E-mail : ecaticid.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATID								FOLIO : 03/22					



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 09/10/2024		SCHEMA DE PUISSANCE				 Ecat-iD Campus				CONTRACT : C01461		CUSTOMER : GALINA MAINE			COUNTRY : FRANCE	
			Fax : (33).2.98.85.31.38		Designed by : AN		POWER DIAGRAM								ARTICLE :			INDEX : V1			
			E-mail : ecatid.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATID								MXA-C014611-OPT2			04/22			

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

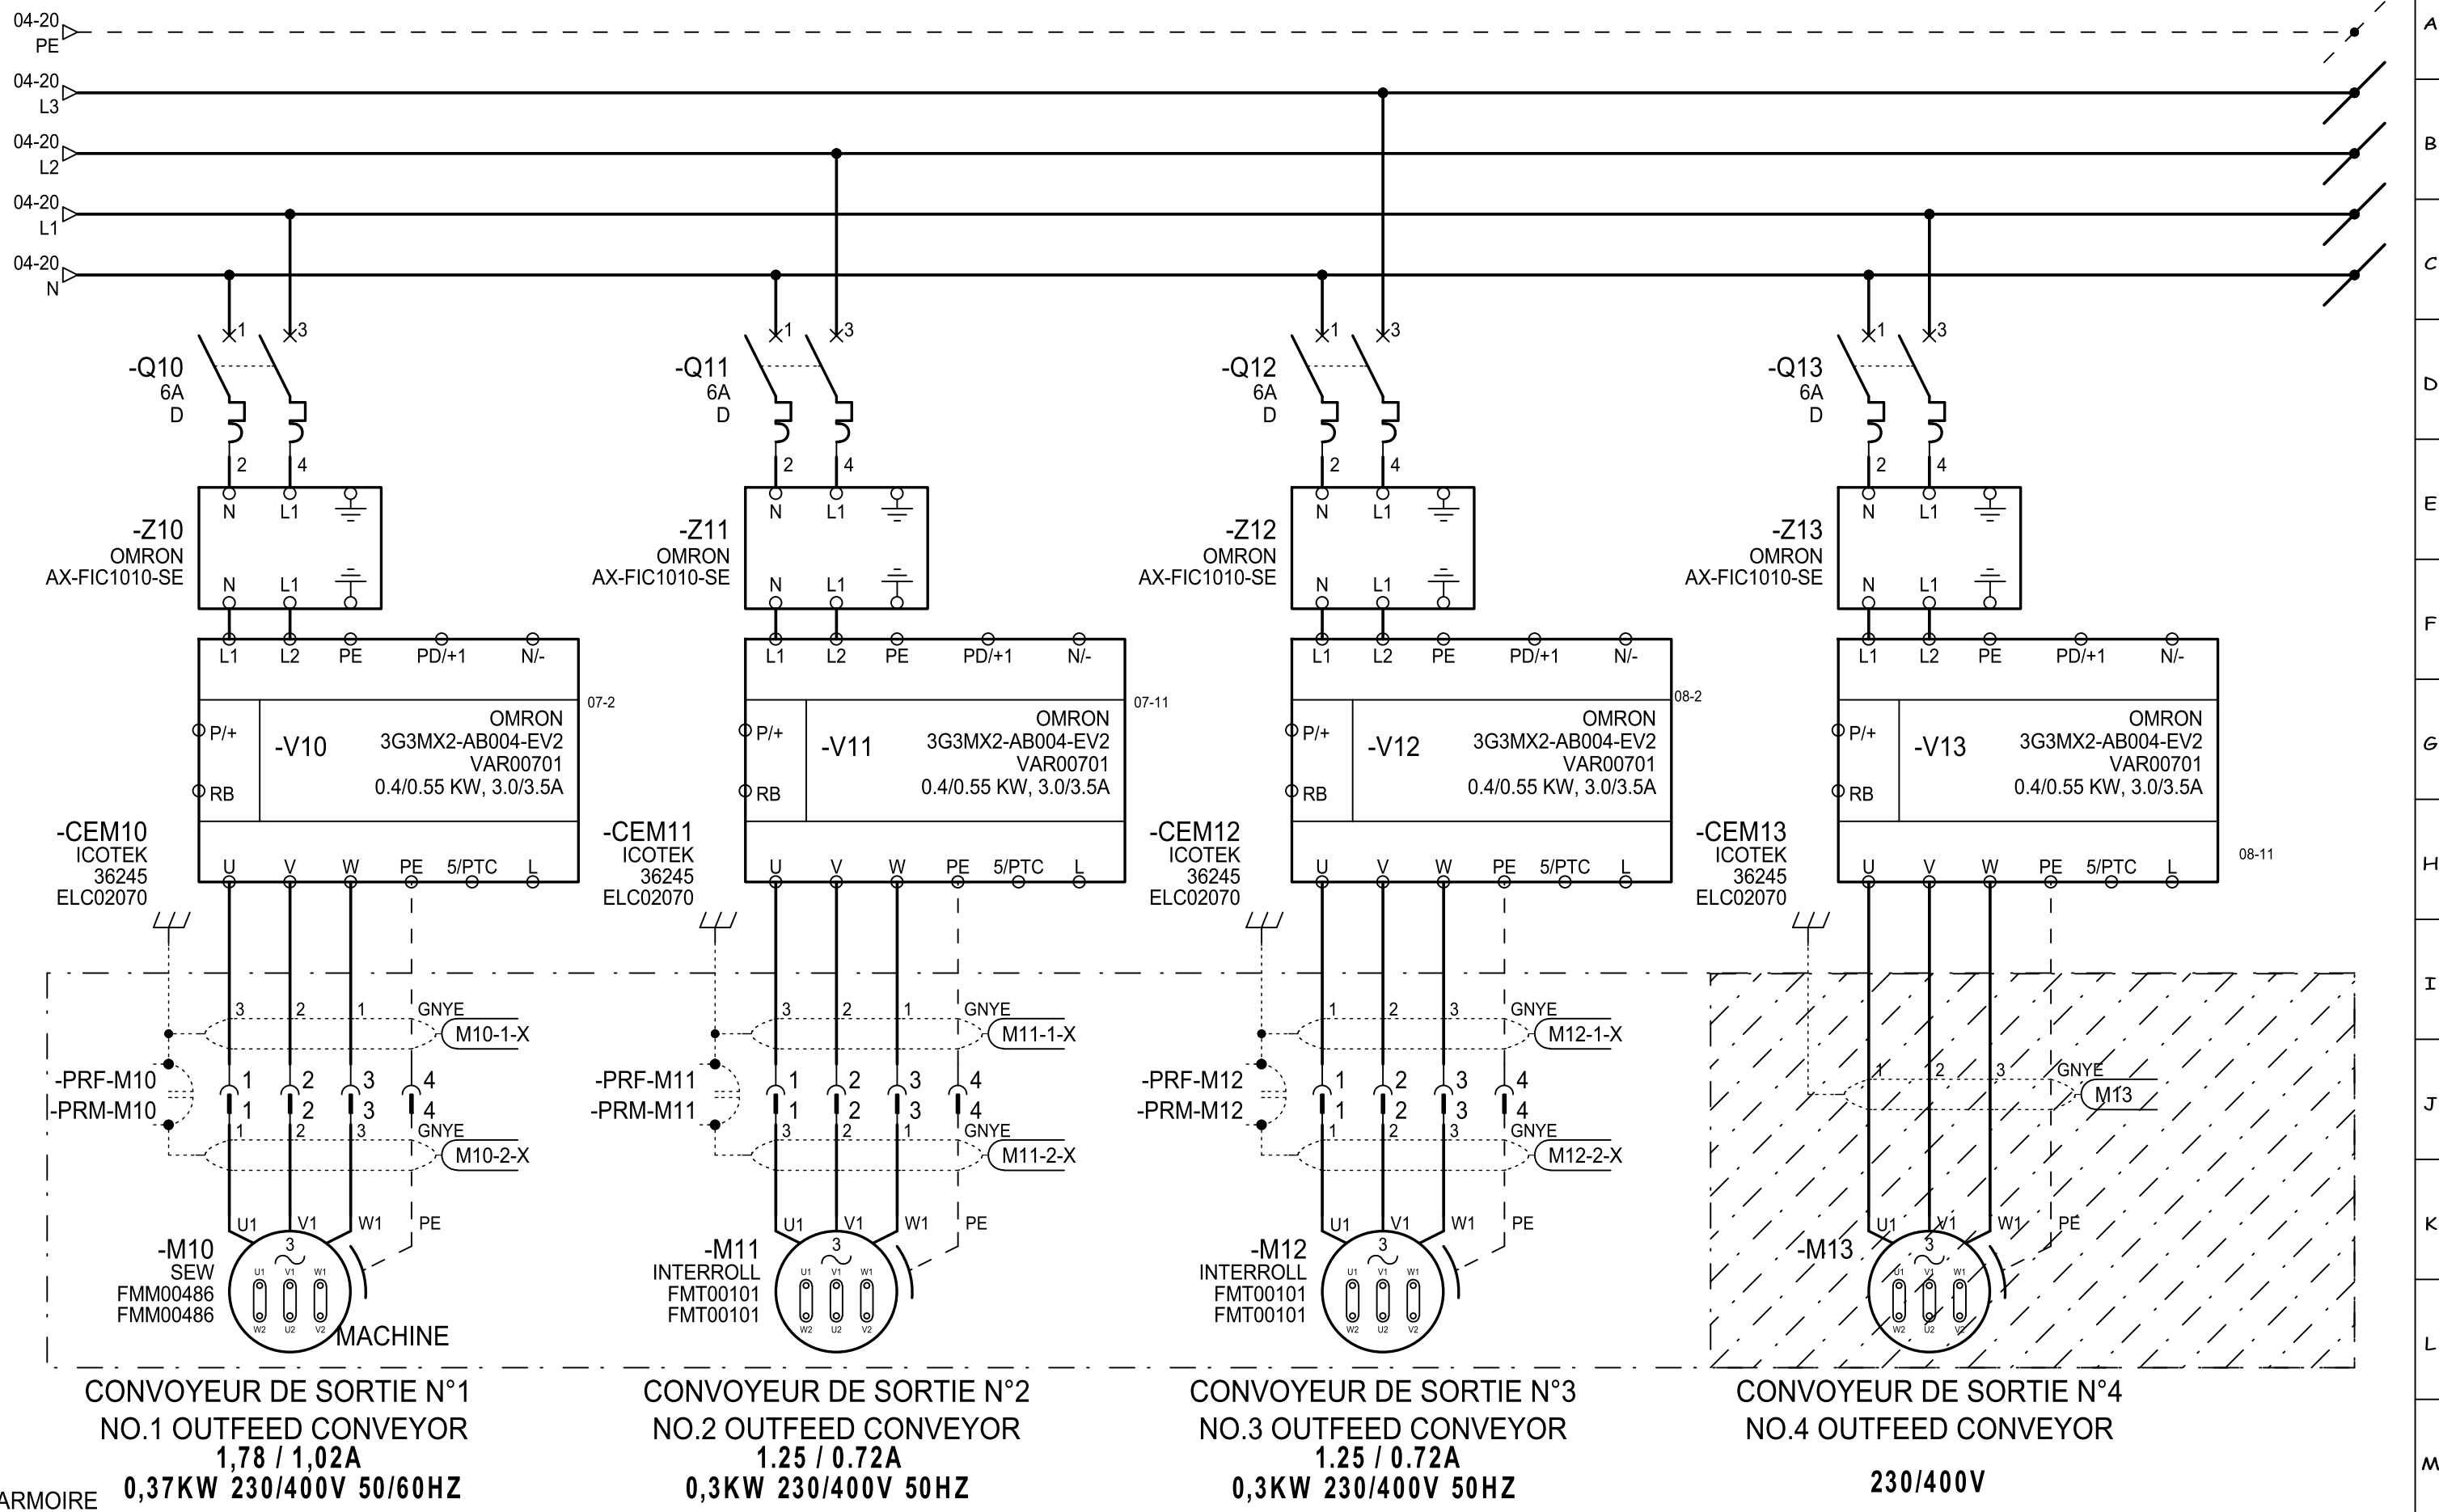

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36

Fax : (33).2.98.85.31.38

E-mail : ecatid.service@ceva.com

Date of creation :
09/10/2024

Designed by :
AN

SCHEMA DE PUISSANCE

POWER DIAGRAM

ENVIRONNEMENT : Elec_IEC V5R2_ECATID



Ecat-iD Campus

CONTRACT :
C01461

CUSTOMER :
GALINA MAINE


COUNTRY :
FRANCE

ARTICLE :

MXA-C014611-OPT2

INDEX : V2

DATE : 05/22

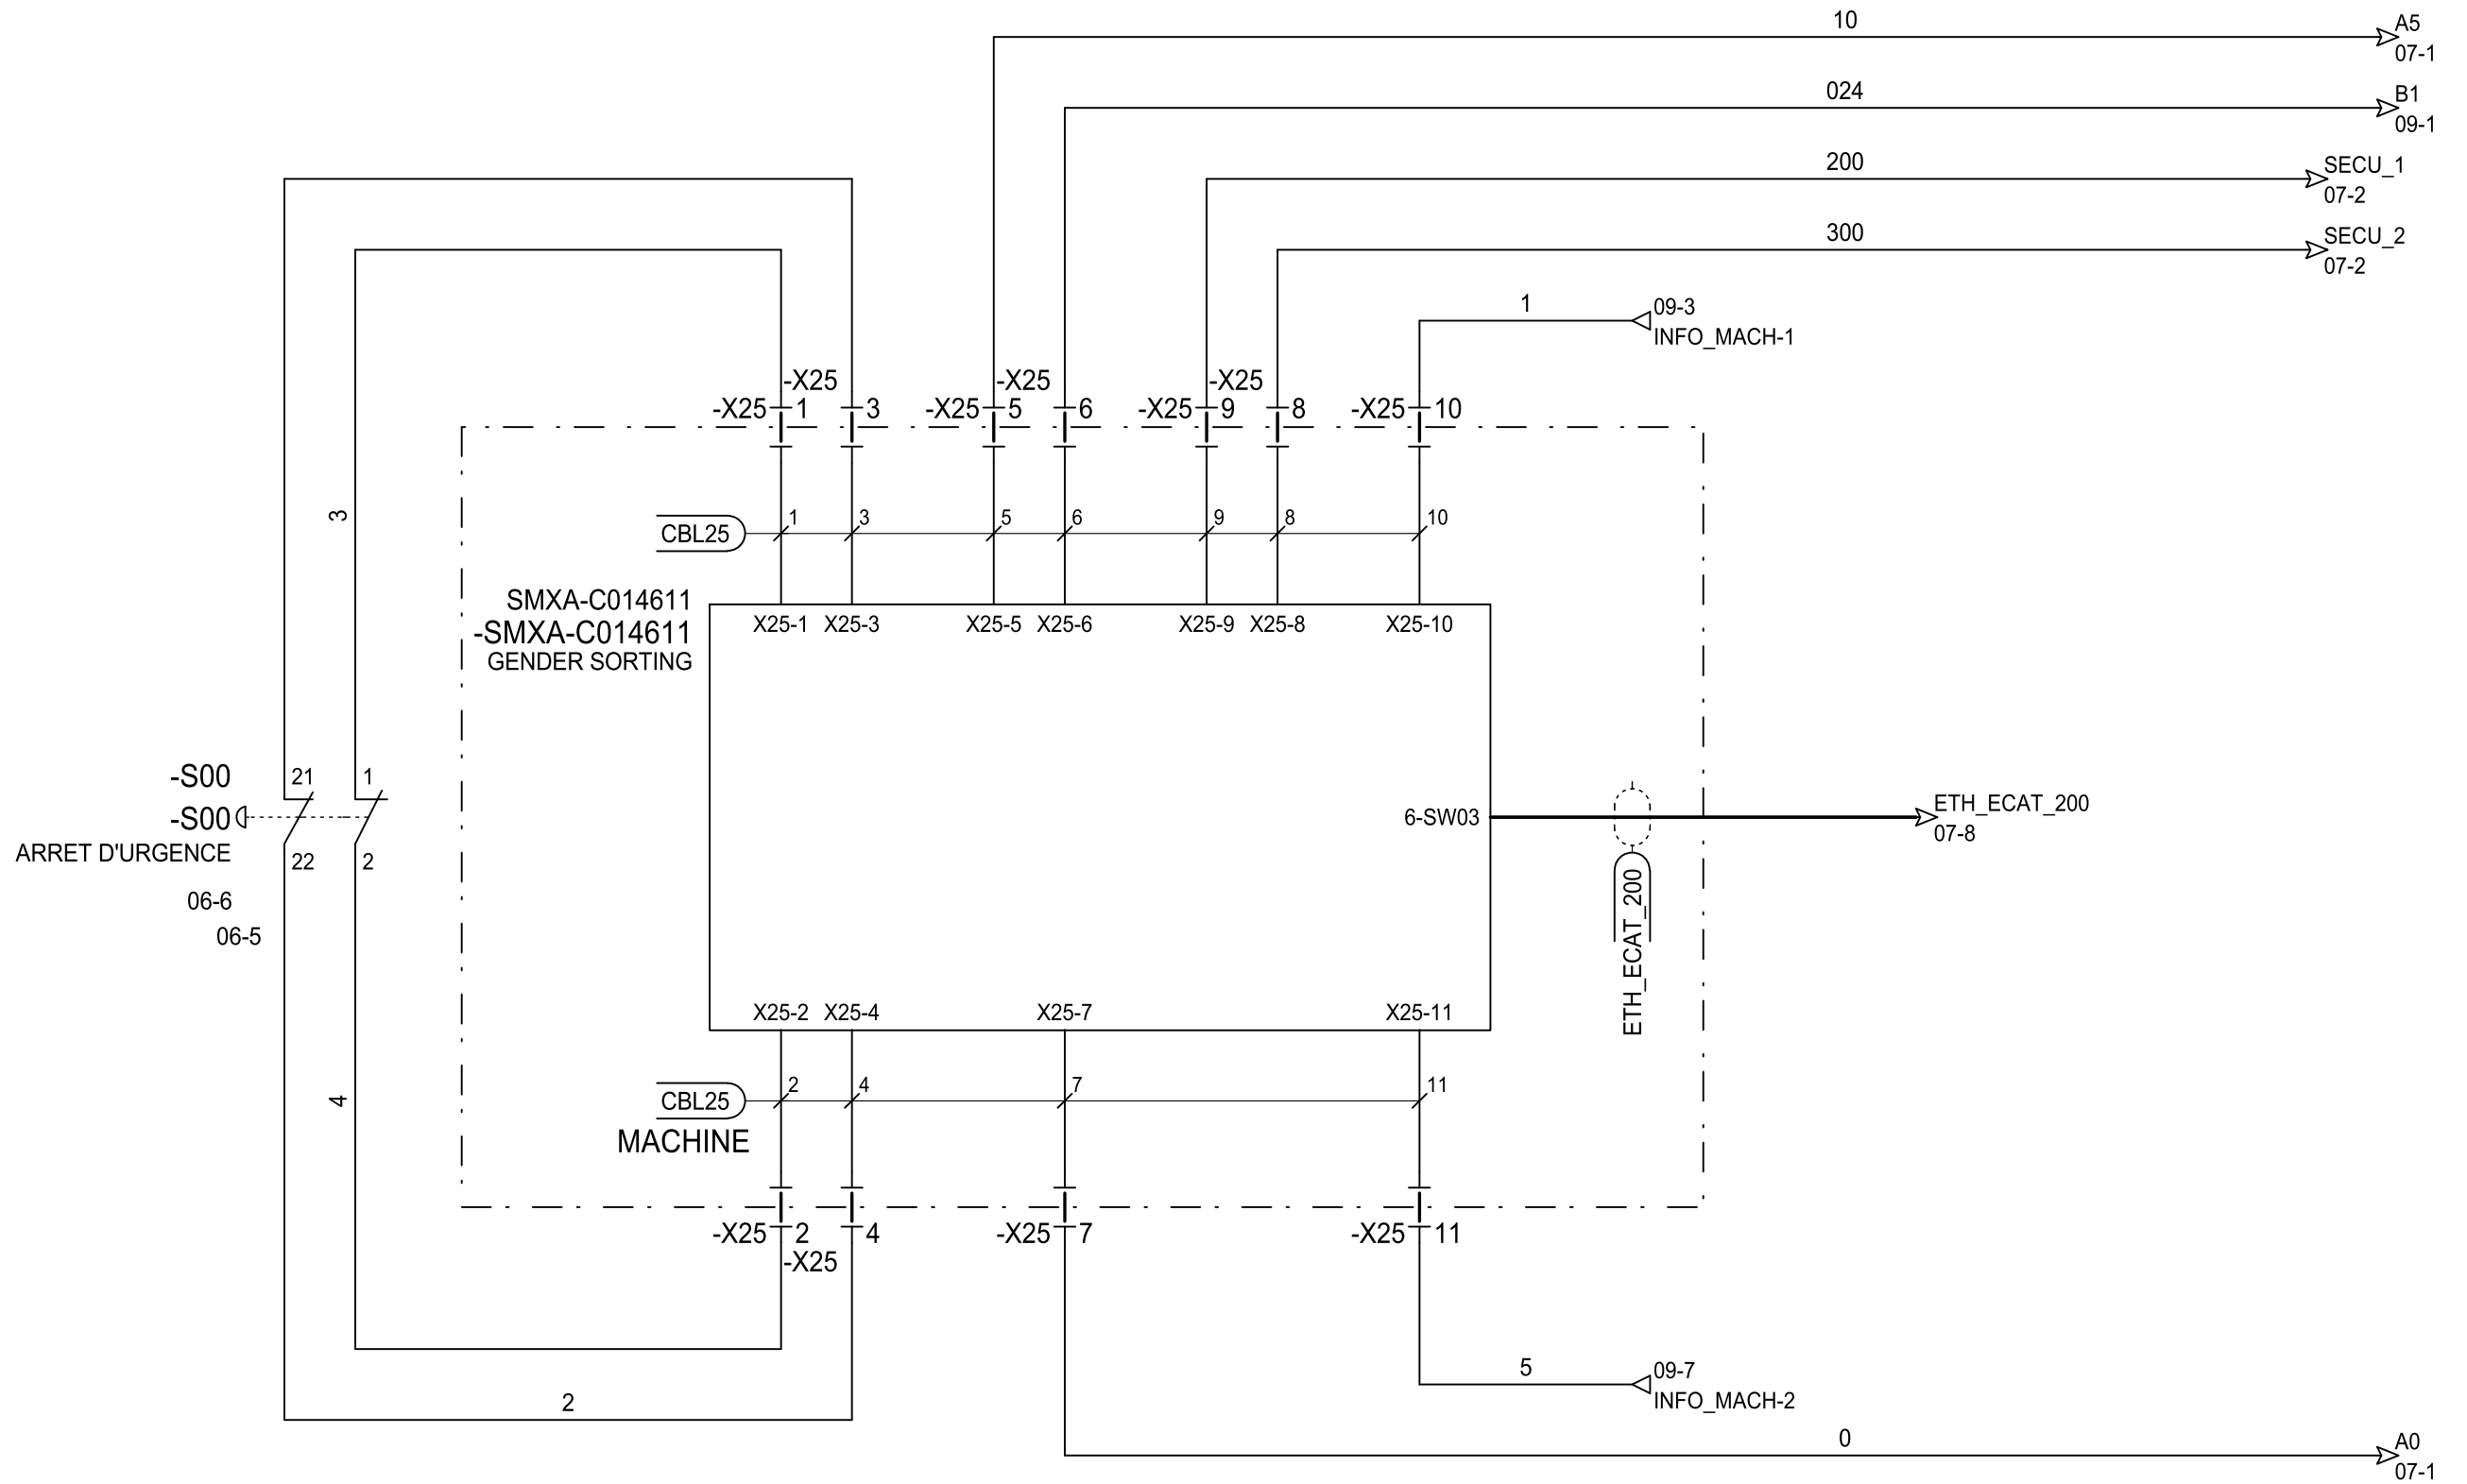


ECHANGE : SMXA => SMXA-C014611-OPT2
EXCHANGE : SMXA => SDIV-C014611

ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 09/10/2024		SCHEMA DE COMMANDE				 Ecata-iD Campus				CONTRACT : C01461		CUSTOMER : GALINA MAINE		COUNTRY : FRANCE			
			Fax : (33).2.98.85.31.38		Designed by : AN		CONTROL DIAGRAM								ARTICLE : MXA-C014611-OPT2				INDEX : V1		FOLIO : 06/22	
			E-mail : ecatid.service@ceva.com		ENVIRONNEMENT : Elec_IEC V5R2_ECATID																	


THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

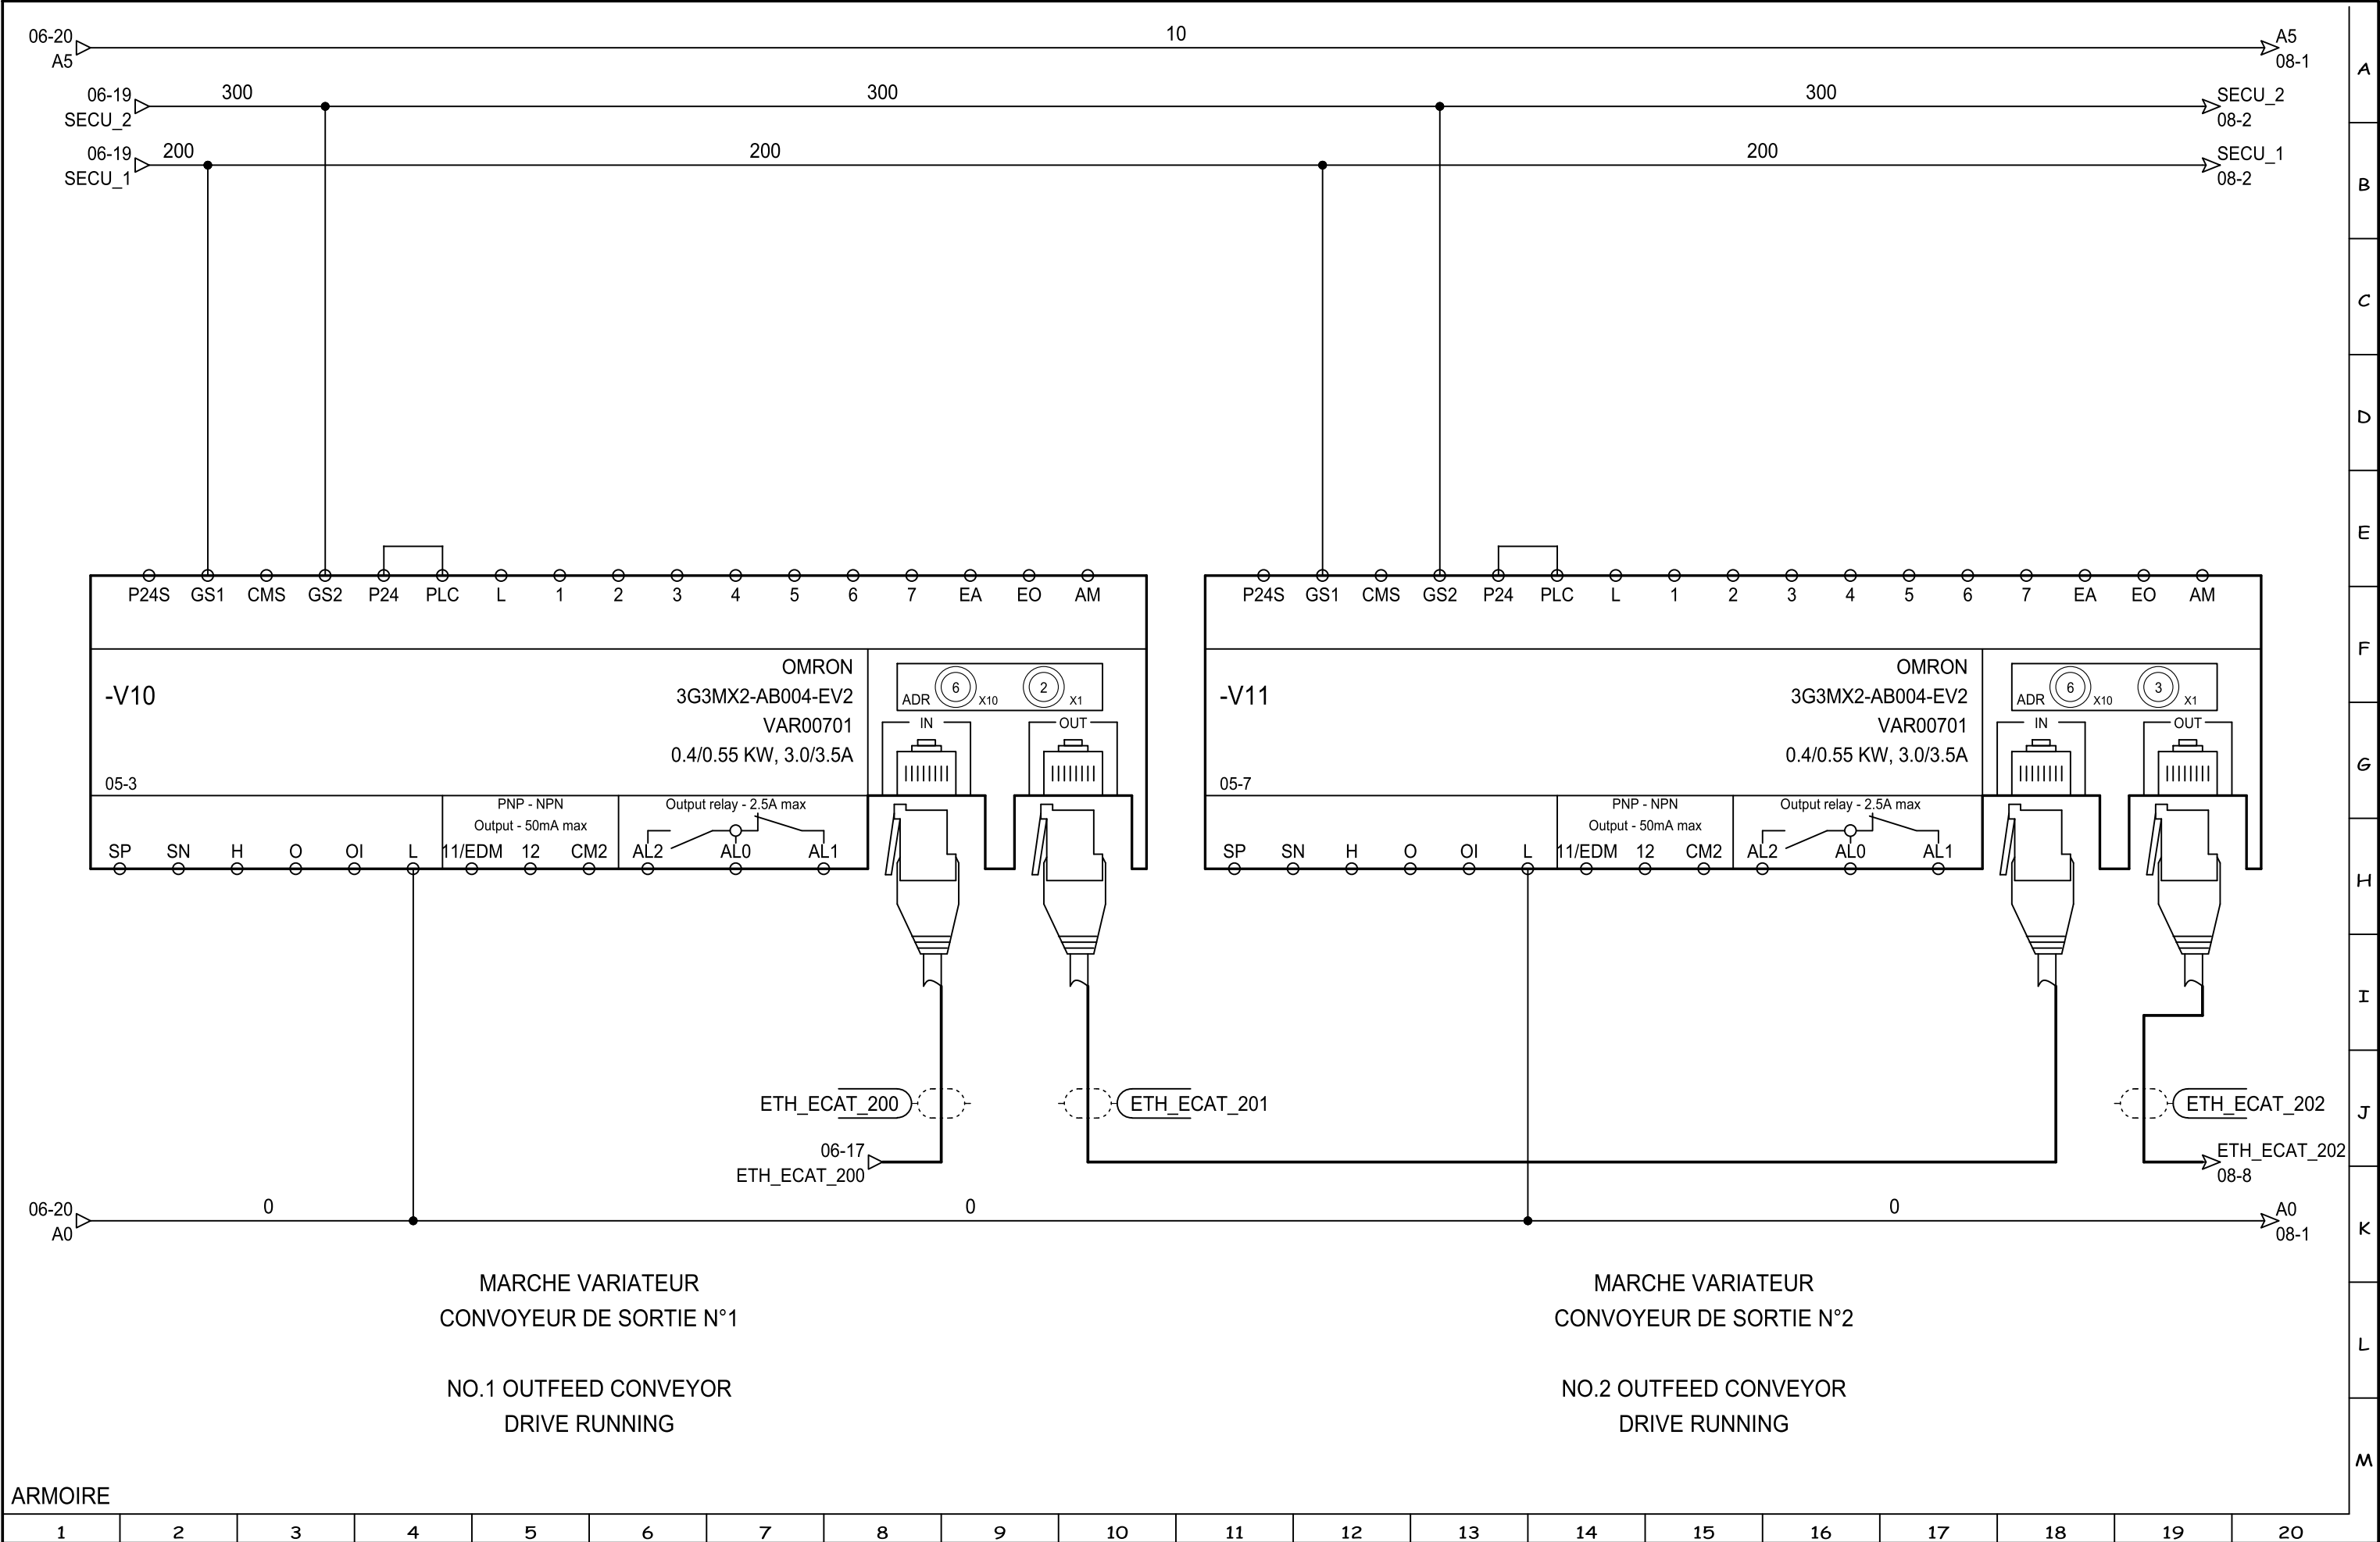

ARMOIRE

ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE	Tél : (33).2.98.85.31.36	Date of creation : 09/10/2024	SCHEMA DE COMMANDE	 Ecat-iD Campus	CONTRACT : C01461	CUSTOMER : GALINA MAINE	COUNTRY : FRANCE
	Fax : (33).2.98.85.31.38	Designed by : AN	CONTROL DIAGRAM		ARTICLE :		INDEX : V3
	E-mail : ecatic.service@ceva.com		ENVIRONNEMENT : Elec_IEC V5R2_ECATICID		MXA-C014611-OPT2		FOLIO : 07/22

A
B
C
D
E
F
G
H
I
J
K
L
M



ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

E-mail : ecatid.service@ceva.com


ENVIRONNEMENT : Elec IEC V5R2 ECATID



ARTICLE :	INDEX : V1
-----------	------------

MXA-C014611-OPT2 **FOLIO:** 10/22


BORNIER DE COMMANDE : X3
CONTROL TERMINAL BLOCK : X3

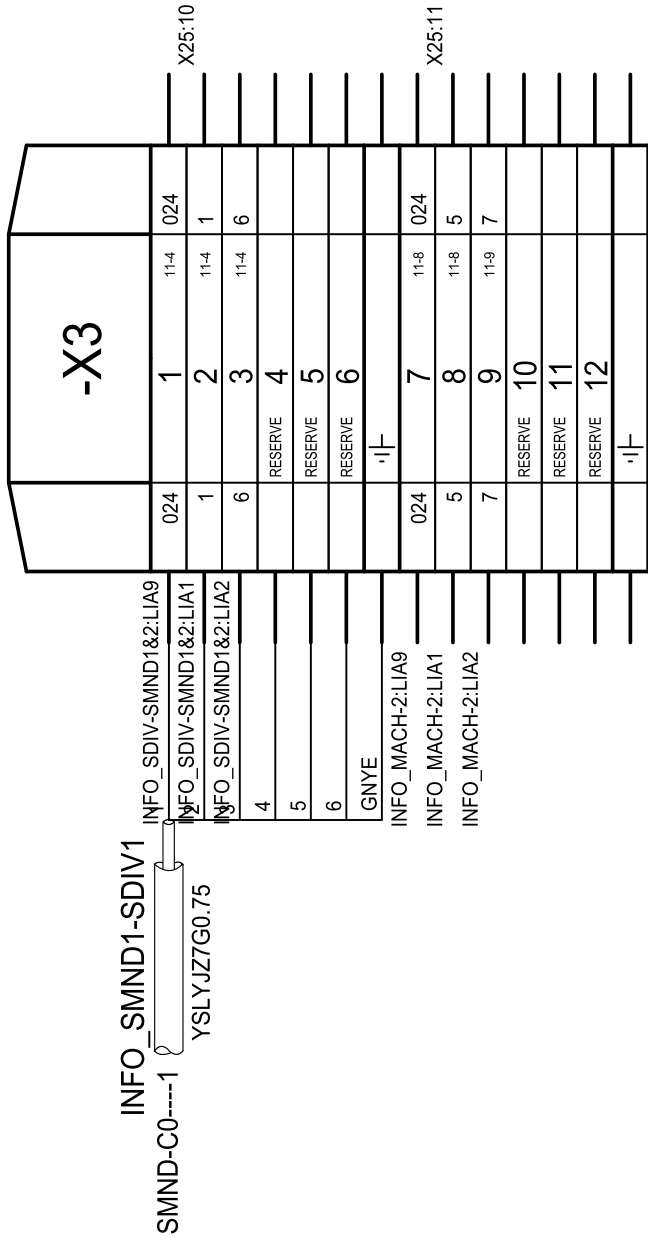

ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE				Tél : (33).2.98.85.31.36		Date of creation : 09/10/2024		BORNIER : X3				 Ecat-iD Campus				CONTRACT : C01461		CUSTOMER : GALINA MAINE		COUNTRY : FRANCE	
				Fax : (33).2.98.85.31.38		Designed by : AN		TERMINAL BLOCK : X3								ARTICLE : MXA-C014611-OPT2				INDEX : V1	
				E-mail : ecaticid.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATICID								FOLIO : 11/22					


BORNIER DE COMMANDE : X25
CONTROL TERMINAL BLOCK : X25

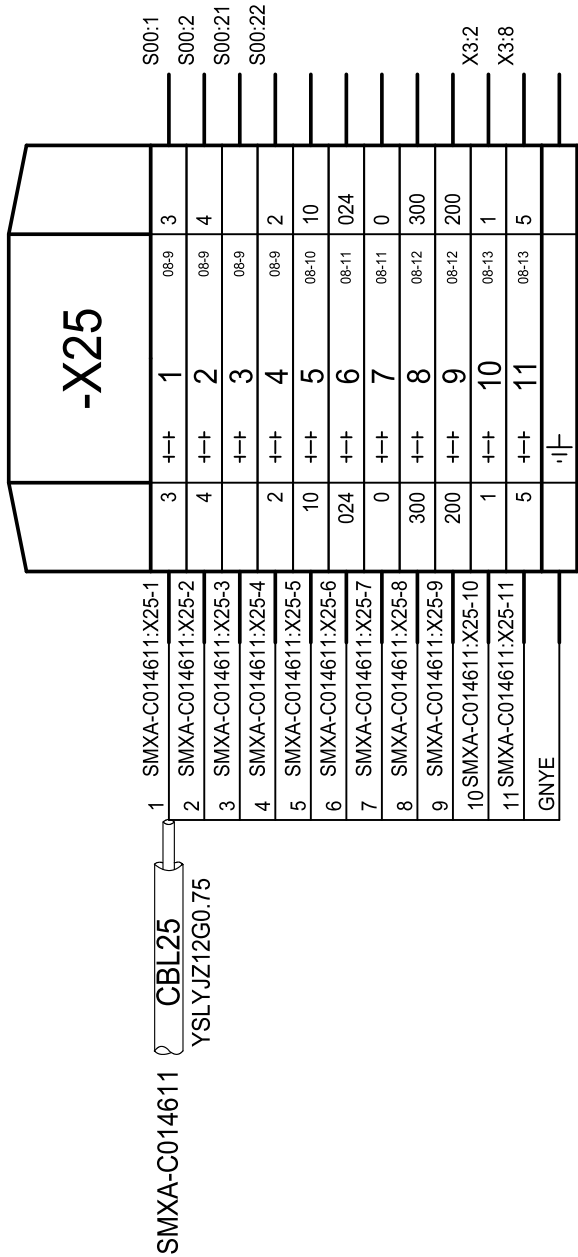

ARMOIRE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 09/10/2024		BORNIER : X25			 Ecat-iD Campus				CONTRACT : C01461		CUSTOMER : GALINA MAINE		COUNTRY : FRANCE	
			Fax : (33).2.98.85.31.38		Designed by : AN		TERMINAL BLOCK : X25							ARTICLE : MXA-C014611-OPT2		INDEX : V1			
			E-mail : ecatic.service@ceva.com			ENVIRONNEMENT : Elec_IEC V5R2_ECATID			FOLIO : 12/22										

A
B
C
D
E
F
G
H
I
J
K
L
M

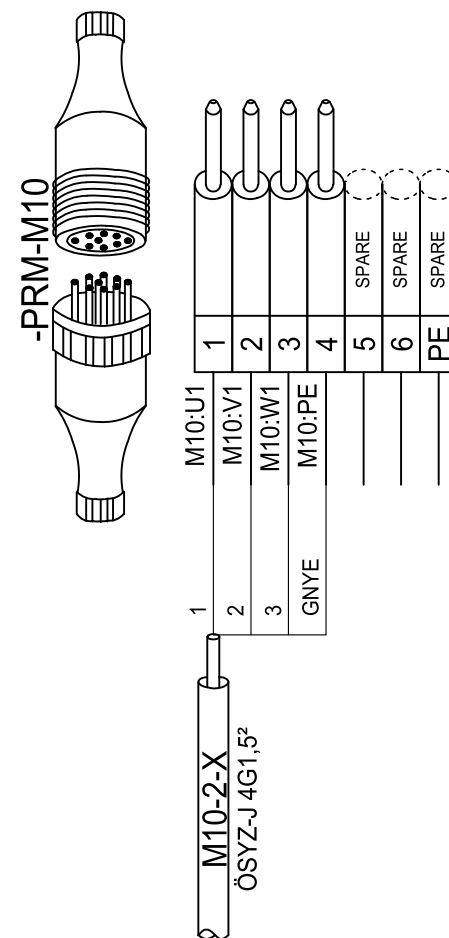


MACHINE

CONTRACT : C01461	CUSTOMER : GALINA MAINE	COUNTRY : FRANCE
ARTICLE : MXA-C014611-OPT2		INDEX : V2
		FOLIO : 13/22

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

CONNECTEUR : PRF-M11 & PRM-M11
CONNECTOR : PRF-M02 & PRM-M02

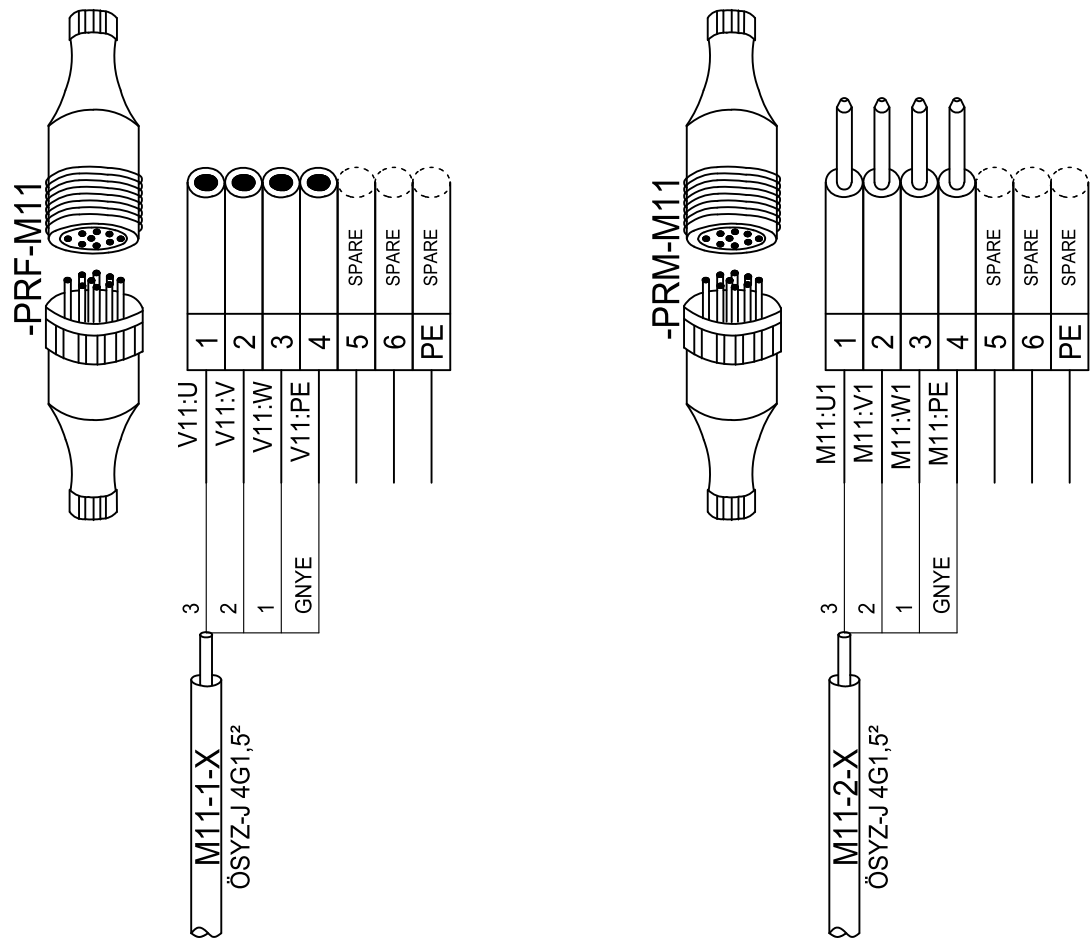

MACHINE

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36
Fax : (33).2.98.85.31.38
E-mail : ecatid.service@ceva.com

Date of creation :
09/10/2024
Designed by :
AN

CONNECTEUR PRF-M02 & PRM-M02
PRF-M02 & PRM-M02 CONNECTOR
ENVIRONNEMENT : Elec_IEC V5R2_ECATID



Ecat-iD Campus

CONTRACT :
C01461

CUSTOMER :
GALINA MAINE



COUNTRY :
FRANCE

ARTICLE :

MXA-C014611-OPT2

INDEX : V2


FOLIO : 14/22

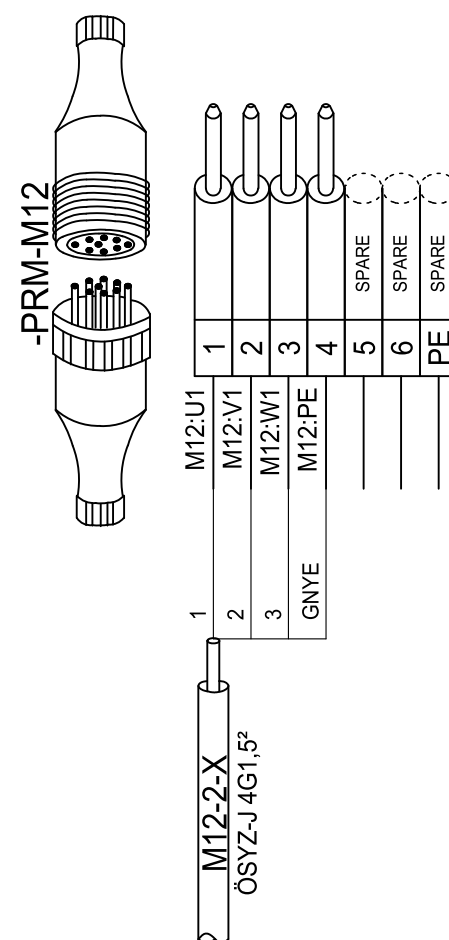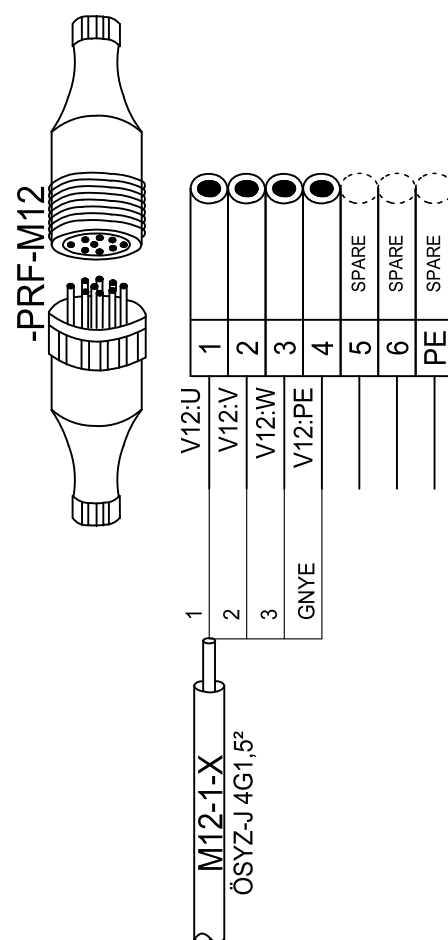

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 09/10/2024		CONNECTEUR PRF-M03 & PRM-M03				 Ecat-iD Campus				CONTRACT : C01461		CUSTOMER : GALINA MAINE		COUNTRY : FRANCE	
			Fax : (33).2.98.85.31.38		Designed by : AN		PRF-M03 & PRM-M03 CONNECTOR								ARTICLE : MXA-C014611-OPT2		INDEX : V2		FOLIO : 15/22	
			E-mail : ecatid.service@ceva.com				ENVIRONNEMENT : Elec_IEC V5R2_ECATID													

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

IMPLANTATION FACADE ARMOIRE
CABINET FRONT LAYOUT

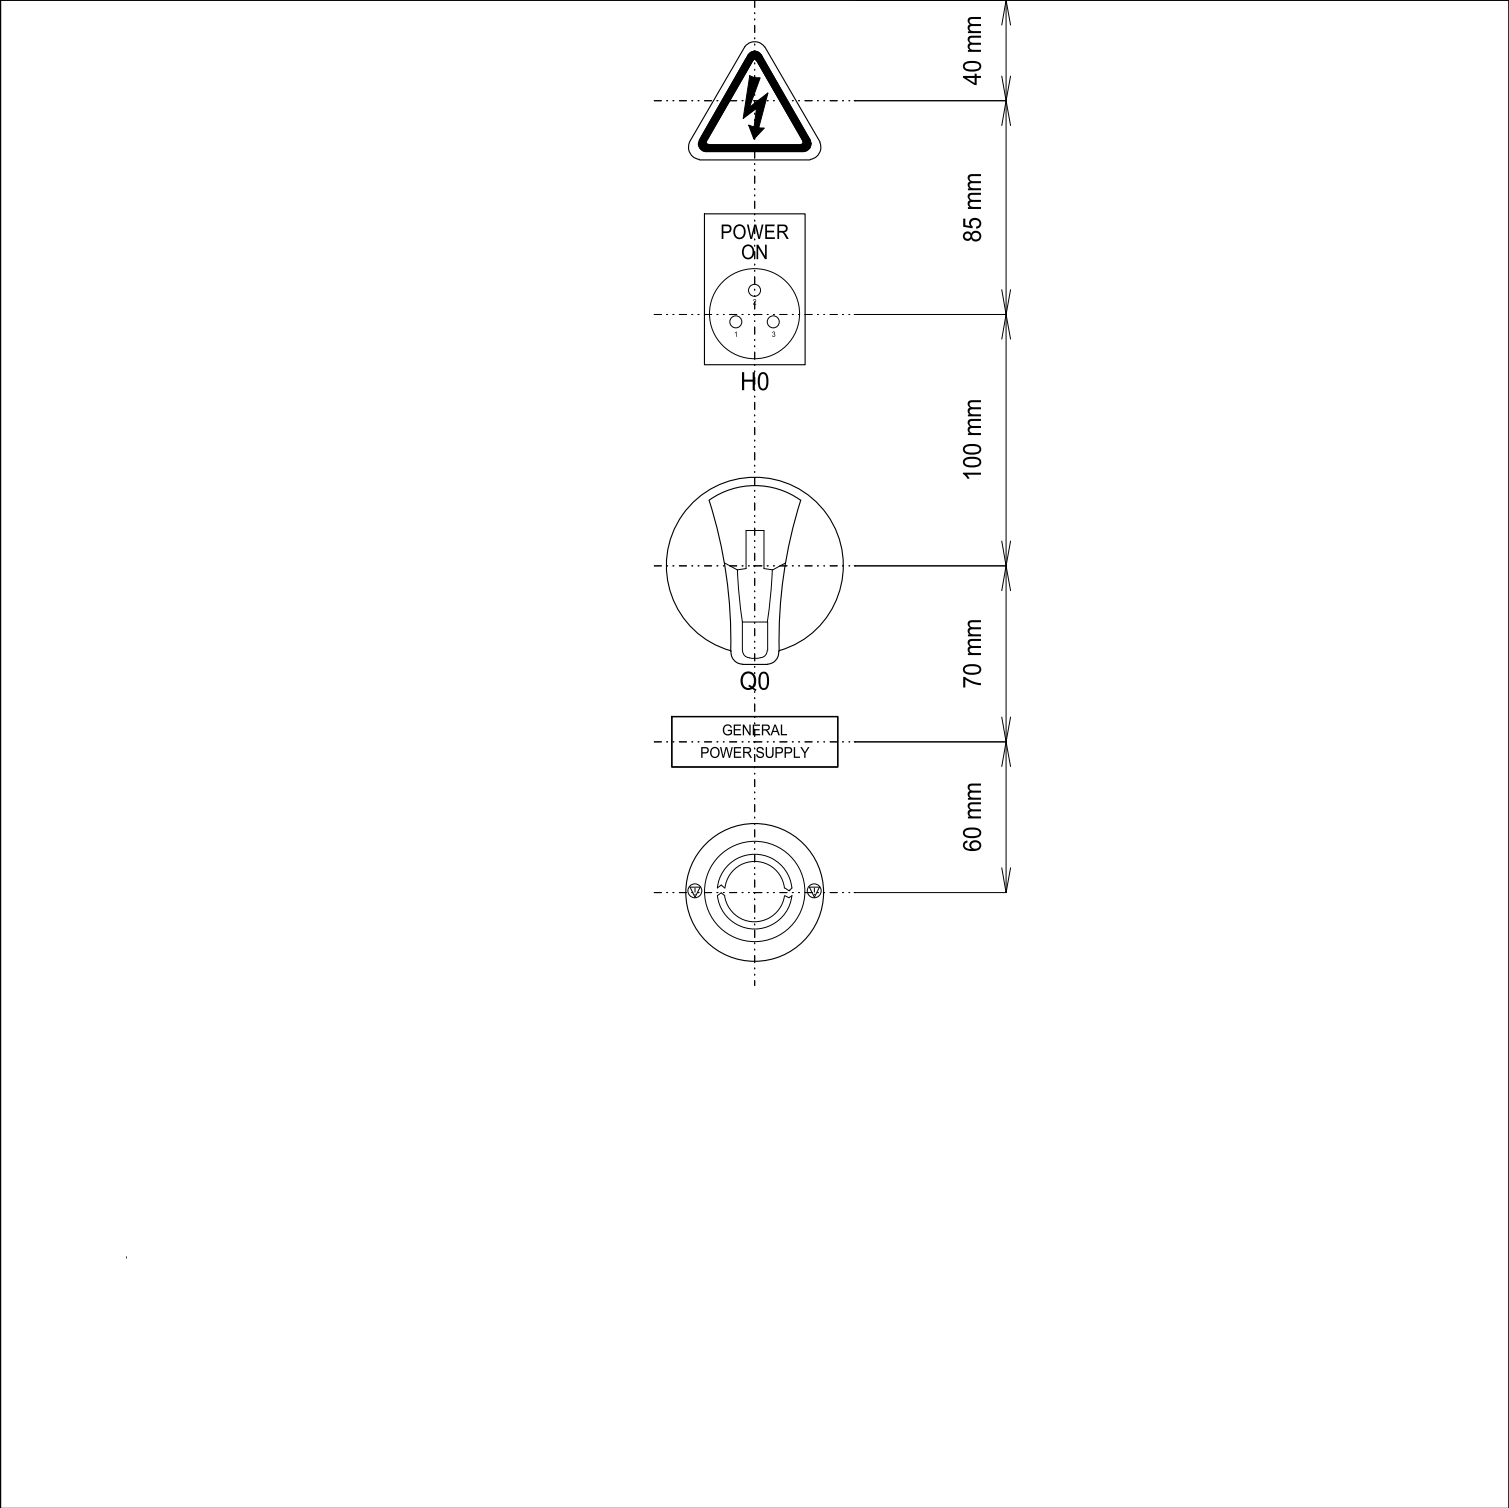

ARMOIRE

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36
Fax : (33).2.98.85.31.38
E-mail : ecatid.service@ceva.com



Date of creation : 09/10/2024	IMPLANTATION FACADE ARMOIRE
Designed by : AN	CABINET FRONT LAYOUT
	ENVIRONNEMENT : Elec_IEC V5R2_ECATID



CONTRACT : C01461	CUSTOMER : GALINA MAINE	COUNTRY : FRANCE
ARTICLE : MXA-C014611-OPT2		INDEX : V1
		FOLIO : 16/22

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

IMPLANTATION COTE ARMOIRE
CABINET SIDE LAYOUT

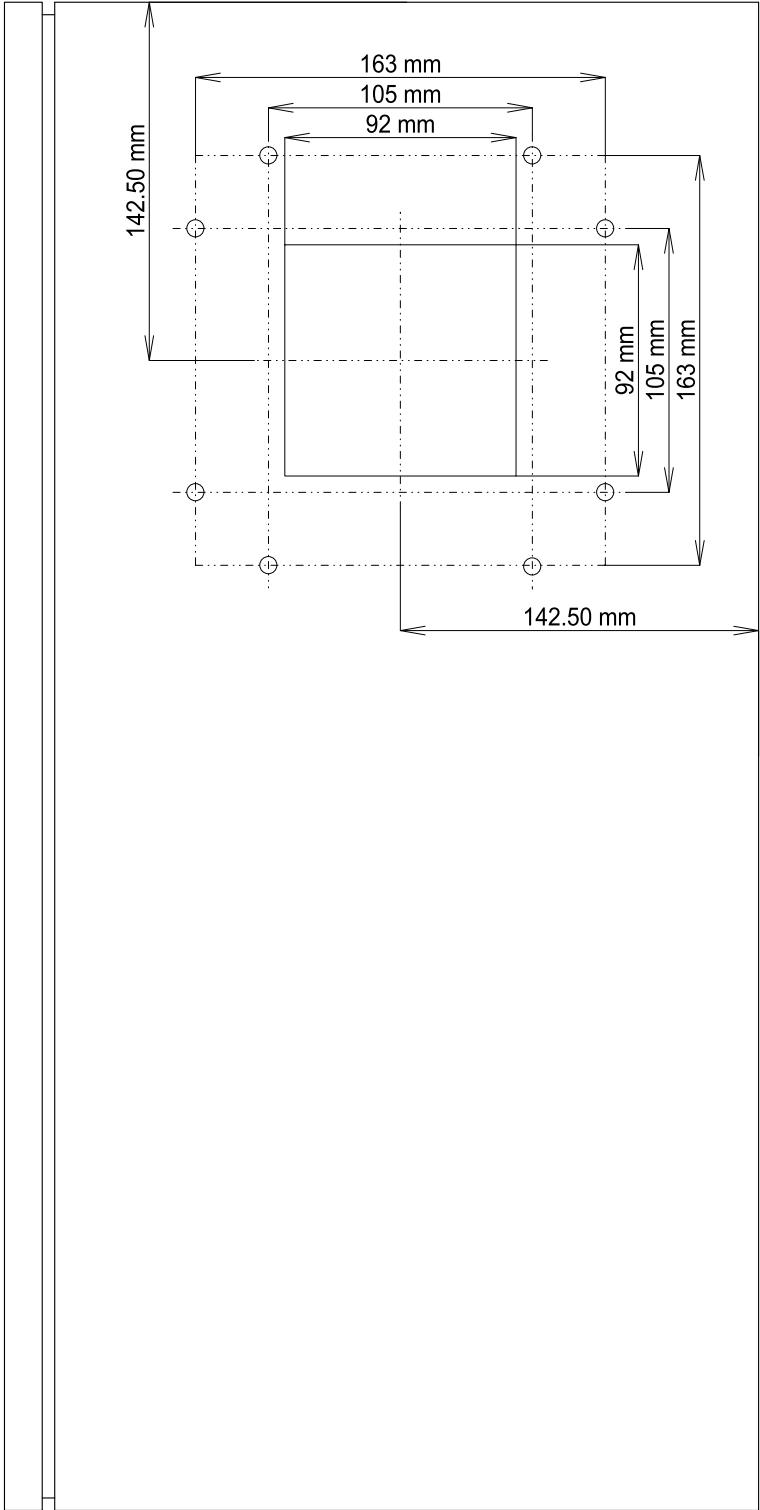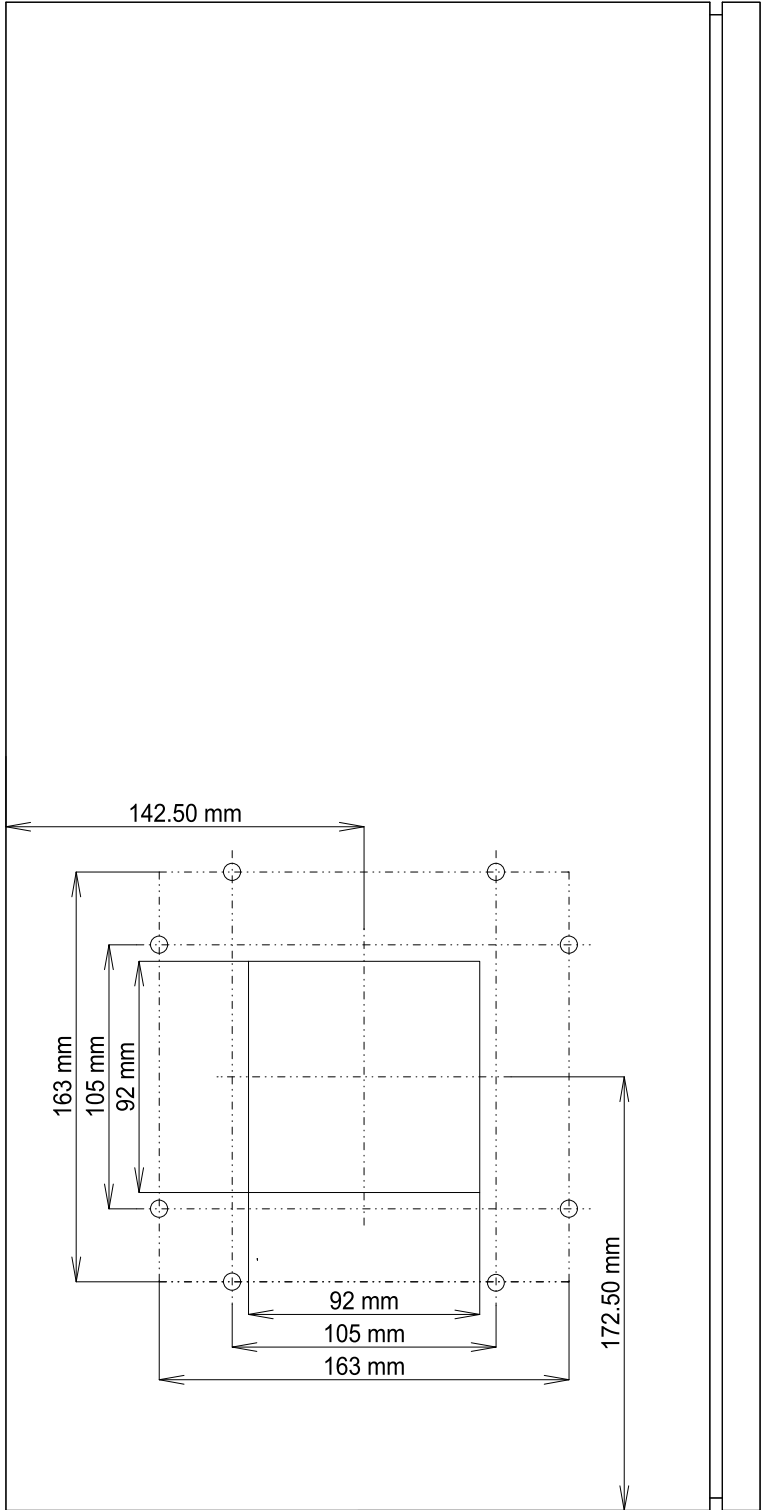

ARMOIRE

ECAT-ID
Z.I DE KERIEL
29800 PLOUEDERN
FRANCE

Tél : (33).2.98.85.31.36

Fax : (33).2.98.85.31.38

E-mail : ecatid.service@ceva.com

Date of creation :
09/10/2024

Designed by :
AN

IMPLANTATION COTE ARMOIRE

CABINET SIDE LAYOUT

ENVIRONNEMENT : Elec_IEC V5R2_ECATID



Ecat-iD Campus

CONTRACT :
C01461

CUSTOMER :
GALINA MAINE

COUNTRY :
FRANCE

ARTICLE :

MXA-C014611-OPT2

INDEX :
V1

FOLIO :
17/22

ECAT-ID

Z.I DE KERIEL

29800 PLOUEDERN

FRANCE

Tél : (33) 2.98.85.31.36

Fax : (33) 2.98.85.31.38

E-mail : ecatid.service@ceva.com

Date of creation : 09/10/2024

Designed by : AN

IMPLANTATION PLATINE ARMOIRE

CABINET BOARD LAYOUT



Ecat-id Campus

CONTRACT : C01461

CUSTOMER : GALINA MAINE

COUNTRY : FRANCE

ARTICLE : MXA-C014611-OPT2

INDEX : V1

DATE : 18/22

ARMOIRE

IMPLANTATION PLATINE ARMOIRE

CABINET BOARD LAYOUT

ESPACEMENT DE 30mm ENTRE CHAQUE VARIATEUR


The diagram illustrates the cabinet board layout for an inverter system. It features four inverters, labeled -V10, -V11, -V12, and -V13, arranged horizontally with a 30mm spacing between them. Below the inverters is a terminal block labeled -REP01, which is connected to a fuse labeled -B01. The fuse is connected to a terminal block labeled X24V. The terminal block X24V is connected to a terminal block labeled X3. The terminal block X3 is connected to a terminal block labeled X25. The terminal block X25 is connected to a terminal block labeled X04X. The dimensions of the components are indicated by arrows and labels: 47.5 mm for the inverters, 77.5 mm for the terminal block -REP01, 85 mm for the fuse -B01, 80 mm for the terminal block X24V, and 60 mm for the terminal block X3. The terminal block X25 has a width of 25 mm, and the terminal block X04X has a width of 40 mm.


THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

LOCALISATION	FOLIO	REPERE	DESIGNATION	QTE	REFERENCE	CODE ECAT-ID	FABRICANT	FILTRE
		ETH_ECAT_200	CONNECTEUR RJ45 A MONTER IP20	2	100023085	CON00035	TELEGARTNER	ARMOIRE
	01	ARMOIRE	COFFRET INOX 600x600x300	1	CPN606030	BOX00367	MP GAMMA	ARMOIRE
ARMOIRE	04	Q0	POLE ADDITIONNEL PRINCIPAL SIRCO M 16A	1	22001000	SEC00052	SOCOMEK	ARMOIRE
ARMOIRE	04	Q0	INTERRUPTEUR-SECTIONNEUR SIRCO M 3x16A NU	1	22003000	SEC00066	SOCOMEK	ARMOIRE
ARMOIRE	04	Q0	CACHE-BORNES POUR SIRCO M 1P 16...40A	1	22941005	SEC00070	SOCOMEK	ARMOIRE
ARMOIRE	04	Q0	CACHE-BORNES POUR SIRCO M 3P 16...40A	1	22943005	SEC00071	SOCOMEK	ARMOIRE
ARMOIRE	04	REP01	REPARTITEUR TETRAPOLAIRE TD 80/100 A, 6 CONNEXIONS	1	563920	ELC01083	NVENT ERICO	ARMOIRE
ARMOIRE	05	CEM10	BRIDE CEM SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
ARMOIRE	05	CEM11	BRIDE CEM SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
ARMOIRE	05	CEM12	BRIDE CEM SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
ARMOIRE	05	CEM13	BRIDE CEM SF/SKL 6-8	1	36245	ELC02070	ICOTEK	ARMOIRE
ARMOIRE	05	Q10	DISJONCTEUR IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, COURBE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
ARMOIRE	05	Q11	DISJONCTEUR IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, COURBE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
ARMOIRE	05	Q12	DISJONCTEUR IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, COURBE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
ARMOIRE	05	Q13	DISJONCTEUR IC60N 2P 6A, 440VAC/6KA 133VDC/6KA, COURBE D	1	A9F75206	DIS00163	SCHNEIDER ELECTRIC	ARMOIRE
ARMOIRE	05	V10	CARTE DE COMMUNICATION ETHERCAT POUR ONDULEUR MX2	1	3G3AX-MX2-ECT	VAR00351	OMRON	ARMOIRE
ARMOIRE	05	V10	VARIATEUR DE FREQUENCE, 200-240VAC 1-PHASE, 0.4/0.55 KW, 3.0	1	3G3MX2-AB004-EV2	VAR00701	OMRON	ARMOIRE
ARMOIRE	05	V11	CARTE DE COMMUNICATION ETHERCAT POUR ONDULEUR MX2	1	3G3AX-MX2-ECT	VAR00351	OMRON	ARMOIRE
ARMOIRE	05	V11	VARIATEUR DE FREQUENCE, 200-240VAC 1-PHASE, 0.4/0.55 KW, 3.0	1	3G3MX2-AB004-EV2	VAR00701	OMRON	ARMOIRE
ARMOIRE	05	V12	CARTE DE COMMUNICATION ETHERCAT POUR ONDULEUR MX2	1	3G3AX-MX2-ECT	VAR00351	OMRON	ARMOIRE
ARMOIRE	05	V12	VARIATEUR DE FREQUENCE, 200-240VAC 1-PHASE, 0.4/0.55 KW, 3.0	1	3G3MX2-AB004-EV2	VAR00701	OMRON	ARMOIRE
ARMOIRE	05	V13	CARTE DE COMMUNICATION ETHERCAT POUR ONDULEUR MX2	1	3G3AX-MX2-ECT	VAR00351	OMRON	ARMOIRE
ARMOIRE	05	V13	VARIATEUR DE FREQUENCE, 200-240VAC 1-PHASE, 0.4/0.55 KW, 3.0	1	3G3MX2-AB004-EV2	VAR00701	OMRON	ARMOIRE
ARMOIRE	05	Z10	FILTRE DE LIGNE CEM POUR VARIATEUR MX2, 200-240VAC MONO, 10A	1	AX-FIC1010-SE	VAR00718	OMRON	ARMOIRE
ARMOIRE	05	Z11	FILTRE DE LIGNE CEM POUR VARIATEUR MX2, 200-240VAC MONO, 10A	1	AX-FIC1010-SE	VAR00718	OMRON	ARMOIRE
ARMOIRE	05	Z12	FILTRE DE LIGNE CEM POUR VARIATEUR MX2, 200-240VAC MONO, 10A	1	AX-FIC1010-SE	VAR00718	OMRON	ARMOIRE
ARMOIRE	05	Z13	FILTRE DE LIGNE CEM POUR VARIATEUR MX2, 200-240VAC MONO, 10A	1	AX-FIC1010-SE	VAR00718	OMRON	ARMOIRE
ARMOIRE	09	B01	THERMOSTAT MECANIQUE 0 60°C "F"	1	NSYCCOTH0	SEN00671	SCHNEIDER ELECTRIC	ARMOIRE
ARMOIRE	09	FAN01	KIT ENS CAPOT VENTILATEUR ELC00708 SANS VENTILATEUR PETIT MO	1	SVB02227	SVB02227	INTERNE	ARMOIRE
ARMOIRE	09	FAN01	KIT ENS CAPOT VENTILATEUR ELC00708 AVEC VENTILATEUR PETIT MO	1	SVB02228	SVB02228	INTERNE	ARMOIRE

THIS DOCUMENT IS THE PROPERTY OF ECAT-ID & REMAIN CONFIDENTIAL IT CANNOT BE COPIED OR COMMUNICATED TO A THIRD PARTY WITHOUT OUR APPROVAL IN WRITING.

LOCALISATION	FOLIO	REPERE	DESIGNATION	QTE	REFERENCE	CODE ECAT-ID	FABRICANT	FILTRE
	05	PRF-M10	CONNECTEUR FEMELLE EVO B6 6P+PE, TYPE B	1	1407727	CON00329	PHOENIX CONTACT	FI
	05	PRF-M10	EMBASE EVO B6 ALUMINIUM M20 SAILLIE + COUVERCLE	2	1412825	CON00345	PHOENIX CONTACT	FI
	05	PRF-M11	CONNECTEUR FEMELLE EVO B6 6P+PE, TYPE B	1	1407727	CON00329	PHOENIX CONTACT	FI
	05	PRF-M11	EMBASE EVO B6 ALUMINIUM M20 SAILLIE + COUVERCLE	2	1412825	CON00345	PHOENIX CONTACT	FI
	05	PRF-M12	CONNECTEUR FEMELLE EVO B6 6P+PE, TYPE B	1	1407727	CON00329	PHOENIX CONTACT	FI
	05	PRF-M12	EMBASE EVO B6 ALUMINIUM M20 SAILLIE + COUVERCLE	2	1412825	CON00345	PHOENIX CONTACT	FI
	05	PRM-M10	CONNECTEUR MALE EVO B6 6P+PE, TYPE B	1	1407728	CON00330	PHOENIX CONTACT	FI
	05	PRM-M10	PRESSE ETOUPE M20 EVO 6 POINTS	1	1411442	CON00328	PHOENIX CONTACT	FI
	05	PRM-M10	CAPOT ALUMINIUM EVO B6	1	1411448	CON00331	PHOENIX CONTACT	FI
	05	PRM-M11	CONNECTEUR MALE EVO B6 6P+PE, TYPE B	1	1407728	CON00330	PHOENIX CONTACT	FI
	05	PRM-M11	PRESSE ETOUPE M20 EVO 6 POINTS	1	1411442	CON00328	PHOENIX CONTACT	FI
	05	PRM-M11	CAPOT ALUMINIUM EVO B6	1	1411448	CON00331	PHOENIX CONTACT	FI
	05	PRM-M12	CONNECTEUR MALE EVO B6 6P+PE, TYPE B	1	1407728	CON00330	PHOENIX CONTACT	FI
	05	PRM-M12	PRESSE ETOUPE M20 EVO 6 POINTS	1	1411442	CON00328	PHOENIX CONTACT	FI
	05	PRM-M12	CAPOT ALUMINIUM EVO B6	1	1411448	CON00331	PHOENIX CONTACT	FI
	13	PRF-M10	CONNECTEUR FEMELLE EVO B6 6P+PE, TYPE B	1	1407727	CON00329	PHOENIX CONTACT	FI
	13	PRF-M10	EMBASE EVO B6 ALUMINIUM M20 SAILLIE + COUVERCLE	2	1412825	CON00345	PHOENIX CONTACT	FI
	13	PRM-M10	CONNECTEUR MALE EVO B6 6P+PE, TYPE B	1	1407728	CON00330	PHOENIX CONTACT	FI
	13	PRM-M10	PRESSE ETOUPE M20 EVO 6 POINTS	1	1411442	CON00328	PHOENIX CONTACT	FI
	13	PRM-M10	CAPOT ALUMINIUM EVO B6	1	1411448	CON00331	PHOENIX CONTACT	FI
	14	PRF-M11	CONNECTEUR FEMELLE EVO B6 6P+PE, TYPE B	1	1407727	CON00329	PHOENIX CONTACT	FI
	14	PRF-M11	EMBASE EVO B6 ALUMINIUM M20 SAILLIE + COUVERCLE	2	1412825	CON00345	PHOENIX CONTACT	FI
	14	PRM-M11	CONNECTEUR MALE EVO B6 6P+PE, TYPE B	1	1407728	CON00330	PHOENIX CONTACT	FI
	14	PRM-M11	PRESSE ETOUPE M20 EVO 6 POINTS	1	1411442	CON00328	PHOENIX CONTACT	FI
	14	PRM-M11	CAPOT ALUMINIUM EVO B6	1	1411448	CON00331	PHOENIX CONTACT	FI
	15	PRF-M12	CONNECTEUR FEMELLE EVO B6 6P+PE, TYPE B	1	1407727	CON00329	PHOENIX CONTACT	FI
	15	PRF-M12	EMBASE EVO B6 ALUMINIUM M20 SAILLIE + COUVERCLE	2	1412825	CON00345	PHOENIX CONTACT	FI
	15	PRM-M12	CONNECTEUR MALE EVO B6 6P+PE, TYPE B	1	1407728	CON00330	PHOENIX CONTACT	FI
	15	PRM-M12	PRESSE ETOUPE M20 EVO 6 POINTS	1	1411442	CON00328	PHOENIX CONTACT	FI
	15	PRM-M12	CAPOT ALUMINIUM EVO B6	1	1411448	CON00331	PHOENIX CONTACT	FI

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36	Date of creation : 09/10/2024		NOMENCLATURE BOUTONNERIE		 Ecat-iD Campus						CONTRACT : C01461		CUSTOMER : GALINA MAINE		COUNTRY : FRANCE	
			Fax : (33).2.98.85.31.38	Designed by : AN		FRENCH BUTTON PARTS LIST								ARTICLE : MXA-C014611-OPT2				INDEX : V2	
			E-mail : ecatid.service@ceva.com		ENVIRONNEMENT : Elec_IEC V5R2_ECATID		21/22												

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
ECAT-ID Z.I DE KERIEL 29800 PLOUEDERN FRANCE			Tél : (33).2.98.85.31.36		Date of creation : 09/10/2024		CARNET DE CABLE				 Ecat-iD Campus				CONTRACT : C01461		CUSTOMER : GALINA MAINE			COUNTRY : FRANCE	
			Fax : (33).2.98.85.31.38		Designed by : AN		FRENCH CABLE BOOKLET								ARTICLE :			INDEX : V2			
			E-mail : ecatid.service@ceva.com		ENVIRONNEMENT : Elec_IEC V5R2_ECATID				MXA-C014611-OPT2						FOLIO : 22/22						