ANN-MS Active GPS antenna Data Sheet

Abstract

The ANN active GPS antenna with integrated low-noise amplifier (LNA) is the perfect match to the u-blox GPS receivers.



48 x 40 x 13 mm

www.u-blox.com





Document Information	on	
Title	ANN-MS	
Subtitle	Active GPS antenna	
Document type	Data Sheet	
Document number	UBX-15025046	(previously GPS-X-02021)
Revision, date	R14	24-Nov-2017
Document status	Production Information	

Document status information	
Objective Specification	Document contains target values. Revised and supplementary data will be published later.
Advance Information	Document contains data based on early testing. Revised and supplementary data will be published later.
Early Production Information	Document contains data from product verification. Revised and supplementary data may be published later.
Production Information	Document contains the final product specification.

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is" and u-blox assumes no liability for the use of the information. No warranty, either express or implied, is given, including but not limited, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by u-blox at any time. For most recent documents, visit www.u-blox.com. Copyright © 2017, u-blox AG.

u-blox is a registered trademark of u-blox Holding AG in the EU and other countries.

UBX-15025046 Page 2 of 13



Contents

Conte	ents	3
1 Fı	unctional description	Δ
1.1	Overview	
1.2	Benefits	
1.3	Features	
2 M	lechanical specification	5
2.1	Dimensions	
2.2	Mechanical data	6
2.3	Connectors	6
2	3.1 SMA connector specification	7
2	3.2 SMB connector	8
2	3.3 MCX connector	9
3 EI	lectrical specification	10
4 Eı	nvironmental specification	10
5 Pı	roduct labeling	11
5.1	_	
6 O	rdering information	12
Revis	ion history	12
Conta	act	13



1 Functional description

1.1 Overview

The ANN-MS is a high performance Active Antenna that enables the full capabilities of u-blox GPS receivers. This compact and easy to use antenna is simple to integrate and can be operated at a supply voltage of 2.7 V to 5.5 V.

1.2 Benefits

- Easy to use
- Compact size
- High performance
- Fast and easy integration
- No antenna know-how necessary

1.3 Features

- Built-in low noise amplifier with 29 dB gain and 0.9 dB noise figure
- 5 m coaxial cable
- Magnetic base suitable for mounting on car roof
- Industrial temperature range: –40 °C to +85 °C
- Wide range of supply voltage: 2.7 V to 5.5 V

UBX-15025046 Page 4 of 13



2 Mechanical specification

2.1 Dimensions

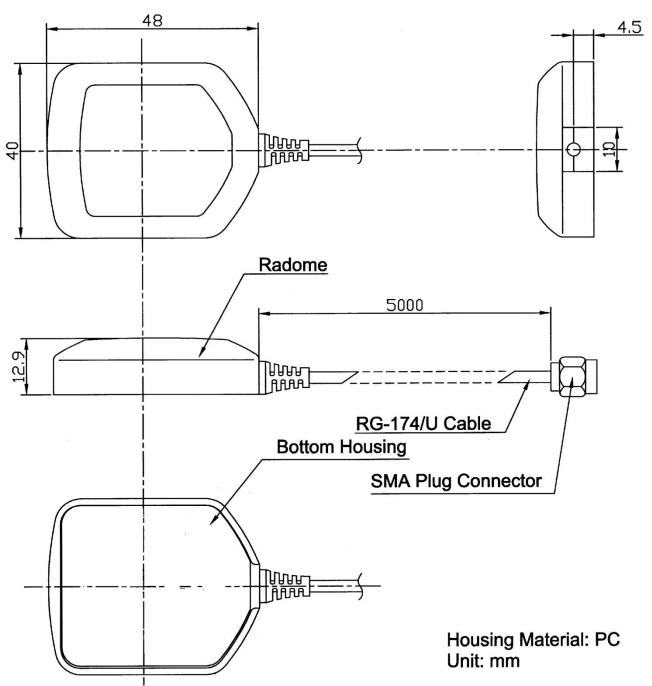


Figure 1: Mechanical outline

UBX-15025046 Page 5 of 13



2.2 Mechanical data

Parameter	Specification	
Weight	≤ 105 g	
Size	48 x 40 x13 mm	
Cable	5m RG174 standard	
Connectors	SMA, SMB, MCX, FAKRA	
Mounting	Magnetic base	
Housing color	Black	

Table 1: Mechanical specifications

2.3 Connectors

Connector types overview



SMA Plug (MB): ANN-MS-0



SMB Plug (MC): ANN-MS-1



MCX Plug (ME): ANN-MS-2

Table 2: Connector types

UBX-15025046 Page 6 of 13



2.3.1 SMA connector specification

Parameter	Specification
Impedance	50 Ω
Frequency range	0 – 12.4 GHz on flexible cable
Dielectric withstanding voltage	RG-316: 250 $V_{\scriptscriptstyle RMS}$ max. at sea level
VSWR	Straight: 1.3 max.
Contact resistance	Center contact: 6 m Ω max. Outer contact: 2 m Ω max.
Insulator resistance	5000 MΩ min.


Table 3: SMA connector electrical specifications

Parameter	Material	Finish
Connector body	Brass per JIS-C3604BD	Nickel or gold plating
Center contact male	Brass per JIS-C3604BD	Gold plating
Insulator	PTFE	None
Crimp ferrule	Annealed copper	Same as body

Table 4: SMA connector material specifications

Parameter	Specification	
Engage force	0.23 Nm max.	
Disengage force	0.23 Nm max.	
Contact retention	2.7 kg min.	
Durability	500 cycles min	

Table 5: SMA connector mechanical specifications

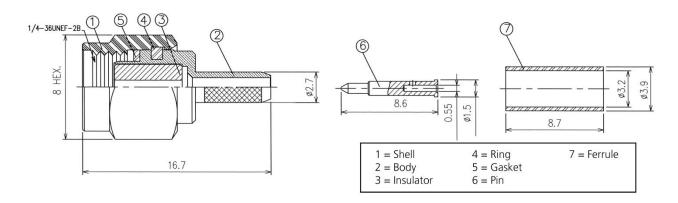

measurements in mm

Figure 2: SMA connector

UBX-15025046 Page 7 of 13



2.3.2 SMB connector

Parameter	Specification
Impedance	50 Ω
Frequency range	0-4 GHz
Dielectric withstanding voltage	350 V _{RMs} max. at sea level
VSWR	Straight: 1.3 max. Right angle 1.5 max.
Contact resistance	Center contact: 6 m Ω max.
	Outer contact: 2.5 m Ω max.
Insulator resistance	1000 M Ω min.

Table 6: SMB electrical specifications

Parameter	Material	Finish
Connector body	Brass per JIS-C3604BD	Nickel or gold plating
Insulator	PTFE	None
Crimp ferrule	Annealed copper	Nickel or gold

Table 7: SMB connector material specifications

Parameter	Specification
Engage force	6.4 kg max.
Disengage force	6.4 kg max.
Coupling nut retention	n/a
Coupling proof torque	n/a
Contact retention	1.8 kg min.
Durability	500 cycles min.

Table 8: SMB connector mechanical specifications

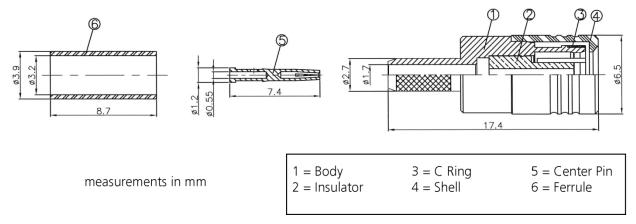


Figure 3: SMB connector

UBX-15025046 Page 8 of 13



2.3.3 MCX connector

Parameter	Specification	
Impedance	50 Ω	
Frequency range	0-6 GHz	
Dielectric withstanding voltage	335 V _{RMs} max. at sea level	
VSWR	Straight: 1.3 max. Right angle: 1.5 max.	
Contact resistance	Center contact: 5 m Ω max. Outer contact: 2.5 m Ω max.	
Insulator resistance	1000 MΩ min.	

Table 9: MCX connector electrical specifications

Parameter	Material	Finish
Connector body	Brass per JIS-C3604BD	Nickel or gold plating
Insulator	PTFE	None
Crimp ferrule	Annealed copper	Nickel or gold

Table 10: MCX connector material specifications

Parameter	Specification	
Engage force	1.5 kg max.	
Disengage force	2.0 kg max.	
Contact retention	2.7 kg min.	
Durahility	500 cycles min	

Table 11: MCX connector mechanical specifications


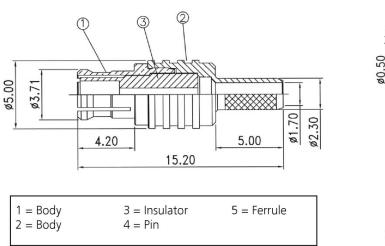


Figure 4: MCX connector



measurements in mm

UBX-15025046 Page 9 of 13



3 Electrical specification

The antenna electrical specifications are provided in Table 12.

Parameter	Specification
Frequency	1575 ± 3 MHz
VSWR	max. 2
Bandwidth	min. 20 MHz
Impedance	50 Ω
Peak gain	4 dBiC min. (on 7cm x 7cm ground plane)
Gain coverage	≥ -4 dBiC at -90°≤ θ ≤90° (over 75% volume)
Polarization	RHCP
Amplifier gain	typ. 29 dB (without cable)
Noise figure	typ. 0.9 dB
Output VSWR	max. 2.0
DC Voltage	$2.7 V_{DC}$ to $5.5 V_{DC}$
DC Current	typ 8.5 mA, ± 4.5 mA

Table 12: Antenna electrical specifications

4 Environmental specification

The antenna environmental specification is provided in Table 13.

Parameter	Specification
Operating temperature	–40 °C to +85 °C
Storage temperature	–40 °C to +85 °C
Vibration	Sine sweep,1G (0-P),10-150-10 Hz each axis
Humidity	40%~95% RH
IP code	IP56: protected against dust and powerful water jets
(IP protection rating)	

Table 13: Antenna environmental specifications

UBX-15025046 Page 10 of 13



5 Product labeling

The product information label is found on the underside of the ANN-MS GPS antenna (see Figure 5). The label includes the product type number, which provides important information about the product.

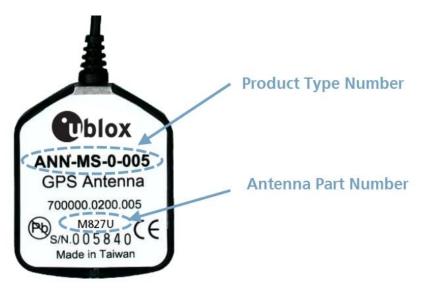


Figure 5: ANN-MS GPS antenna label(Antenna Part Number:M827U).

5.1 Explanation of codes

3 different product code formats are used. The **Product Name** is used in general communications about product families and variants. The **Ordering Code** includes options and quality, while the **Type Number** includes the hardware versions. Table 14 below details these 3 different formats:

Format	Structure
Product name	PPP-GV
Ordering code	PPP-GV-T
Type number	PPP-GV-T-XXX

Table 14: Product code formats

The parts of the product code are explained in Table 15.

Code	Meaning	Example	
PPP	Product family	ANN	
G	Product generation M		
V	Variant	S	
T	Option	Defines connector type:	
		0 = SMA connector	
		1 = SMB connector	
		2 = MCX connector	
XXX	Product Detail	Describes cable length	
		005 = 5 m cable	

Table 15: Product code parts

UBX-15025046 Page 11 of 13



6 Ordering information

Ordering No.	Product	
ANN-MS-0-005-0	Active Antenna, 5m cable, SMA connector Single units	
ANN-MS-1-005-0	Active Antenna, 5m cable, SMB connector Single units	
ANN-MS-2-005-0	Active Antenna, 5m cable, MCX connector Single units	

Table 16: Product ordering codes

Revision history

Revision	Date	Name	Status / Comments
-	4. Apr. 2003	gzur	Initial Release
А	30. Oct. 2003	gzur	New support address in Asia
В	02. Feb. 2006	gzur	RoHS Statement, table 2 (wider supply voltage range, lower power consumption)
С	20. Jul 2006	gzur	Section 2.3 and 5: New ANN-MS-3 with FAKRA connector
D	13. Dec. 2007	tgri	Connectors, CI
D1	16. Jan 2008	tgri	Connectors
D2	29 May 2008	tgri	Electrical Specification
D3	16 Jan 2009	tgri	IP Code
E	5 May 2010	tgri	New CI, info FAKRA connector
E1	28 Oct. 2010	tgri	Corrected voltage range in overview
F	8 Aug 2011	tgri	Added labeling information
F1	6 Sept. 2011	tgri	Added connector information Last revision with document number GPS-X-02021.
R13	14 Oct 2015	julu	Updated humidity specification in section 4 and u-blox contact information
R14	24 Nov 2017	rmak	Updated antenna specification in Section 1, Table 12, and u-blox India office contact information. FAKRA connector variant: ANN-MS-3 removed (EOL).

UBX-15025046 Page 12 of 13



Contact

For complete contact information visit us at www.u-blox.com

u-blox Offices

North, Central and South America

u-blox America, Inc.

Phone: +1 703 483 3180 E-mail: info_us@u-blox.com

Regional Office West Coast:

Phone: +1 408 573 3640 E-mail: info_us@u-blox.com

Technical Support:

Phone: +1 703 483 3185 E-mail: support_us@u-blox.com

Headquarters Europe, Middle East, Africa

u-blox AG

Phone: +41 44 722 74 44
E-mail: info@u-blox.com
Support: support@u-blox.com

Documentation Feedback

E-mail: docsupport@u-blox.com

Asia, Australia, Pacific

u-blox Singapore Pte. Ltd.

Phone: +65 6734 3811 E-mail: info_ap@u-blox.com Support: support_ap@u-blox.com

Regional Office Australia:

Phone: +61 2 8448 2016 E-mail: info_anz@u-blox.com Support: support_ap@u-blox.com

Regional Office China (Beijing):

Phone: +86 10 68 133 545
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Chongqing):

Phone: +86 23 6815 1588 E-mail: info_cn@u-blox.com Support: support_cn@u-blox.com

Regional Office China (Shanghai):

Phone: +86 21 6090 4832 E-mail: info_cn@u-blox.com Support: support_cn@u-blox.com

Regional Office China (Shenzhen):

Phone: +86 755 8627 1083 E-mail: info_cn@u-blox.com Support: support_cn@u-blox.com

Regional Office India:

Phone: +91 80 4050 9200 E-mail: info_in@u-blox.com Support: support_in@u-blox.com

Regional Office Japan (Osaka):

Phone: +81 6 6941 3660 E-mail: info_jp@u-blox.com Support: support_jp@u-blox.com

Regional Office Japan (Tokyo):

Phone: +81 3 5775 3850
E-mail: info_jp@u-blox.com
Support: support_jp@u-blox.com

Regional Office Korea:

Phone: +82 2 542 0861 E-mail: info_kr@u-blox.com Support: support_kr@u-blox.com

Regional Office Taiwan:

Phone: +886 2 2657 1090 E-mail: info_tw@u-blox.com Support: support_tw@u-blox.com

UBX-15025046 Page 13 of 13