Department of Education

SHS-TVL

Computer Programming 1

.Net Technology

Module 2

PEPITO "NITE" R. GUERRERO JR.
Writers

PRECIOUS VASQUEZ
Validator

What I Need To Know

This module was designed and written with you in mind. It is here to teach you **the Introduction to HTML and its basic principles**. The scope of this module permits it to be used in many different learning situations. The language used recognizes the diverse vocabulary level of students.

After going through this module, you are expected to:

1. Identify link properties HTML;
2. Identify and Appreciate how to embed images on your HTML document
3. Be able to use HTML table tag to format its contents
4. Use different tags and properties of HTML to create their work; and
5. Appreciate your created work.

What I know

Directions: Choose the letter of the best answer. Use a separate sheet of paper for your answers.

1. _____ are html tag use to create bulleted list.
   a. Ordered list c. Arrays
   b. Unordered List d. Pseudo List

2. _____ is where most html tags are placed
   a. <body> c. <html>
   b. <head> d. <title>

3. _____ identifies that the document is an HTML document.
   a. <html> c. <head>
   b. <title> d. <body>

For items 4-8, please refer to the following choices.

I. Hyper Text Mark-up Language
II. HTML Tags
III. Start Tags and End tags

IV. Web Browser
V. HTML Documents

4. Another term for web pages _____.
a. I b. II c. IV d. V

5. It sets the beginning and end oh an HTML tag _____.
a. I b. II c. III d. IV

6. These are represented by the <> symbols
a. I b. II c. IV d. V

7. This is the meaning of HTML.
b. II b. III c. IV d. I

8. Chrome, Firefox and Internet explorer are samples of
c. II b. III c. IV d. V

For items 9-13, please refer to the following choices.

I. Body tag
II. title tag
III. HTML tag
IV. Header tags
V. paragraph

9. pertains that the document is an html document____
b. I b. II c. III d. IV

10. visible page content is placed between this tag____
a. I b. II c. III d. IV

11. Series of tags used to denote headings
a. I b. II c. III d. IV

12. It has a symbol <p>
a. II b. III c. IV d. V

13. If you want to put a name on top of your browser.
a. II b. III c. IV d. V

14. How many header tags are there? _____.
    a. 1 c. 99
    b. 5 d. 6

15. Which header tag is the smallest _____?
    a. H1 c. H3
    b. H5 d. H6

LT 5 HTML Links, Images and tables

What's New

Links

So far you've been making a stand-alone web page, which is all very well and nice, but what makes the Internet so special is that it all **links** together.

The "H" and "T" in "HTML" stand for "hypertext", which basically means a system of linked text.

An **anchor** tag (a) is used to define a link, but you also need to add something to the anchor tag — the **destination** of the link.

Add this to your document:

```
<!DOCTYPE html>

<html>

<head>
    <title>My first web page</title>
</head>

<body>

    <h1>My first web page</h1>

    <h2>What this is</h2>
```

```
    <p>A simple page put together using HTML</p>

    <h2>Why this is</h2>
    <p>To learn HTML</p>

    <h2>Where to find the tutorial</h2>
    <p><a href="http://www.hotdog.com">HTML Dog</a></p>

</body>

</html>
```

The destination of the link is defined in the href attribute of the tag. The link can be absolute, such as “http://www.htmldog.com”, or it can be relative to the current page.
So if, for example, you had another file called “flyingmoss.html” in the same directory then the line of code would simply be <a href="flyingmoss.html">The miracle of moss in flight</a> or something like this.

A link does not have to link to another HTML file, it can link to any file anywhere on the web.

A link can also send a user to another part of the same page they are on. You can add an id attribute to just about any tag, for example <h2 id="moss">Moss</h2>, and then link to it by using something like this: <a href="#moss">Go to moss</a>. Selecting this link will scroll the page straight to the element with that ID.

There are a number of ways **links** — the absolutely fundamentally most important interactive element of web sites — can be made more **accessible** to those people with disabilities.

Tabbing

Users who do not or cannot use pointing devices can **tab** through links and, as such, links should be in a logical tabbing order. The tabindex attribute allows you to define this order although if the HTML is linear, as it should be, a logical tabbing order should automatically fall into place.

```
<ul>
    <li><a href="here.html" tabindex="1">Here</a></li>
    <li><a href="there.html" tabindex="3">There</a></li>
    <li><a href="limbo.html" tabindex="2">Limbo</a></li>
</ul>
```

In this example (which is used purely as a demonstration - it would be quite dumb, practically speaking), tabbing would jump from “Here” to “Limbo” to “There”.

The good bit of link-accessibility advice is to **write good link text**. Have the words the a tags wrap around explain where the link will take the user. If someone is using a screen reader, having

the links read out to them as they tab between them, the user will then know what they're letting themselves in for if they select a link. "Click here" or random words aren't especially helpful…

Link titles

If you have a link that isn't self-descriptive, or the link destination could benefit from being explained in more detail, you can add information to a link using the `title` attribute.

```
<p>I'm really bad at writing link text. <a href="inept.html" title="Why I'm
rubbish at writing link text: An explanation and an apology.">Click here</a>
to find out more.</p>
```

Another tip: **Don't have links open something in a new window or tab.** It's precious to think your page is important enough to stay alive while a user visits elsewhere anyway. We all know how to use the back button. We know how to close windows and tabs, too, but if you can't actually see that that's what has happened…

If you insist on doing this, at least mention it in a link title.

Access keys

Access keys allow easier navigation by assigning a **keyboard shortcut** to a link (which will usually gain focus when the user presses "Alt" or "Ctrl" + the access key).

```
<a href="somepage.html" accesskey="s">Some page</a>
```

For users who do not use pointing devices, this can be a quick way to navigate. The trouble is that there the user may not know what they are unless they are explicitly stated although some assistive software will tell the user what these are.

Skipping HTML

To aid tabbing, you can supply links that allow users to jump over chunks of your web page. You might want to allow someone to jump over a plethora of navigation links, for example, so they can just read a page's main content rather than cycle through all of the links:

```
<header>
    <h1>The Heading</h1>
    <a href="#content">Skip to content</a>
</header>

<nav>
    <!--loads of navigation stuff -->
</nav>
```

```
<section id="content">
    <!--lovely content -->
</section>
```

You probably won't want this link to be displayed visually - it's a peculiar link to see for abled-bodied users and screen reader users won't need to see it (it will be read out). So you can use CSS to render it invisible but it could also be beneficial to those with motor disabilities so you might also want to consider making it visible when it has focus from being tabbed to using the `:focus` CSS pseudo class but this is for another topic :D

What's In

A. let's see what you learned

Directions: Logos represents their respective websites create a link to the following websites.

1. Wattpad.com

2.abs-cbn.com

3.Lazada.com.ph

4.Netflix.com

Homepage

10.google.co

5.youtube.com

9.Inquirer.net

8.instagram.com

7.yahoo.com

6.google.com

Answer:

1.
2.
3.
4.
5.
6.
7.
8.
9.
10.

Images

Things might seem a little bland and boring with all of this text formatting. Of course, the web is not just about text, it is a multi-media extravaganza and the most common form of sparkle is the **image**.
The img tag is used to put an image in an HTML document and it looks like this:

```
<img src="http://www.hotdog.com/badge1.gif" width="120" height="90" alt="HTML Dog">
```

The src attribute tells the browser where to find the image. Like the a tag, this can be absolute, as the above example demonstrates, but is usually relative. For example, if you create your own image and save it as "alienpie.jpg" in a directory called "images"

then the code would be <img src="images/alienpie.jpg"...
The width and height attributes are necessary because if they are excluded, the browser will tend to calculate the size as the image loads, instead of when the page loads, which means that the layout of the document may jump around while the page is loading.
The alt attribute is the **alternative description**. This is an accessibility consideration, providing meaningful information for users who are unable to see the image (if they are visually impaired, for example).
Note that, like the br tag, because the img element does not enclose any content, no closing tag is required.

The construction of images for the web is a little outside of the remit of this website, but it is worth noting a few things…

The most commonly used file formats used for images are **JPEGs**, **GIFs**, and **PNGs**. They are compressed formats, and have very different uses.

A JPEG (pronounced "jay-peg") uses a mathematical algorithm to compress the image and will distort the original slightly. The lower the compression, the higher the file size, but the clearer the image.

JPEGs are typically used for images such as photographs.

A GIF (pronounced "jif") can have no more than 256 colors, but they maintain the colors of the original image. The lower the number of colors you have in the image, the lower the file size will be. GIFs also allow any pixel in the image to be transparent.

GIFs are typically used for images with solid colors, such as icons or logos.

A PNG (pronounced "ping") replicates colors, much like a GIF, but allows 16 million colors as well as alpha transparency (that is, an area could be 50% transparent).

PNGs are typically used for versatile images in more complex designs BUT they are not fully supported by some older browsers.

The web is forever getting faster and faster but you obviously want your web pages to download as quickly as possible. Using super-high resolution images isn't doing your or your user's bandwidth (or patience) any favors. Image compression is a great tool and you need to strike a balance between image quality and image size. Most modern image manipulation programs allow you to compress images and the best way to figure out what is best suited for yourself is trial and error.

HTML Tag: img

Image. This could be a photograph or graph or any other meaningful pictorial content. It should not be used purely for presentation, where CSS, such as background-image is more appropriate.

Required Attributes

Attribute	Description	Possible value
src	Location of the image to be used	URL

Optional Attributes

Attribute	Description	Possible value
alt	Alternative text that will replace the image if the image isn't available. This **must be included**, if possible. In circumstances where it isn't, the img must be the only content of a figure element in addition to a figcaption that contains a caption for the image.	Text.
width	The width of the image in pixels. This can also be done, or overridden, with CSS.	Number.
height	The height of the image in pixels. This can also be done, or overridden, with CSS.	Number.
ismap	Indicates that the element is a used as a server-side image map.	None.
usemap	Image map name.	Hash name (eg. #flyer) matching the name of a map element (eg. <map name="flyer">…).
crossorigin	Used in conjunction with JavaScript to determine how Cross Origin Resource Sharing requests are handled.	• anonymous use-credentials
width	The width of the image in pixels. This can also be done, or overridden, with CSS.	Number.

Example

```
<img src="http://www.htmldog.com/badge1.gif" alt="HTML Dog" width="120" height="90">
```

What's In

1. what are the different image formats?

    1.
    2.
    3.

2. What are the optional parameters in <img>
    1.
    2.
    3.
    4.
    5.
    6.
    7.

What's New

Tables

HTML **tables** are still known for being used **lay out** pages. The correct use for tables is to do exactly what you would expect a table to do — to **structure tabular data**.

There are a number of tags used in tables, and to fully get to grips with how they work is probably the most difficult area of this HTML Beginner Tutorial.

Copy the following code into the body of your document and then we will go through what each tag is doing:

```
<table>
  <tr>
    <td>Row 1, cell 1</td>
    <td>Row 1, cell 2</td>
```

```
      <td>Row 1, cell 3</td>
   </tr>
   <tr>
      <td>Row 2, cell 1</td>
      <td>Row 2, cell 2</td>
      <td>Row 2, cell 3</td>
   </tr>
   <tr>
      <td>Row 3, cell 1</td>
      <td>Row 3, cell 2</td>
      <td>Row 3, cell 3</td>
   </tr>
   <tr>
      <td>Row 4, cell 1</td>
      <td>Row 4, cell 2</td>
      <td>Row 4, cell 3</td>
   </tr>
</table>
```

The table element defines the table.
The tr element defines a table **row**.
The td element defines a **data cell**. These must be enclosed in tr tags, as shown above.
If you imagine a 3x4 table, which is 12 cells, there should be four tr elements to define the rows and three td elements within each of the rows, making a total of 12 td elements.

Table row

containing data cells (td) and/or header cells (th).tr elements are children of table, tbody, thead, or tfoot elements.

Example

```
<table>
   <tr>
      <th>Question</th>
      <th>Answer</th>
      <th>Correct?</th>
   </tr>
   <tr>
      <td>What is the capital of Burundi?</td>
      <td>Bujumburra</td>
      <td>Yes</td>
   </tr>
   <tr>
      <td>What is the capital of France?</td>
      <td>F</td>
      <td>Erm... sort of</td>
```

```
  </tr>
</table>
```

td elements are children of tr elements.

Attribute	Description	Possible value
src	Location of the image to be used	URL
colspan	Across how many columns the cell should spread (default is 1).	Number.
rowspan	Across how many rows the cell should spread (default is 1).	Number.
headers	Explicitly specifies which header cells, if any, are associated to the data cell.	A single or comma-separated list of table cell id values.

What's In

Directions: 1. cut off the following pieces

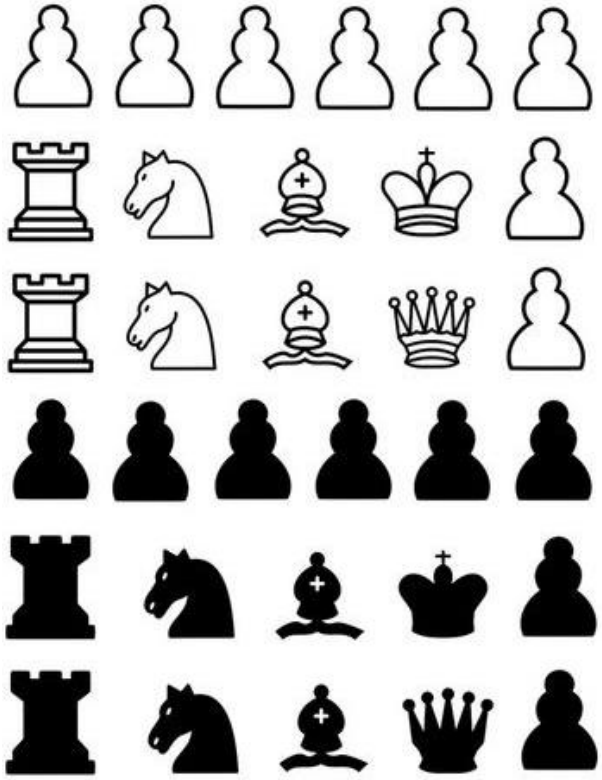

2.Given the Chessboard below have, cut it off

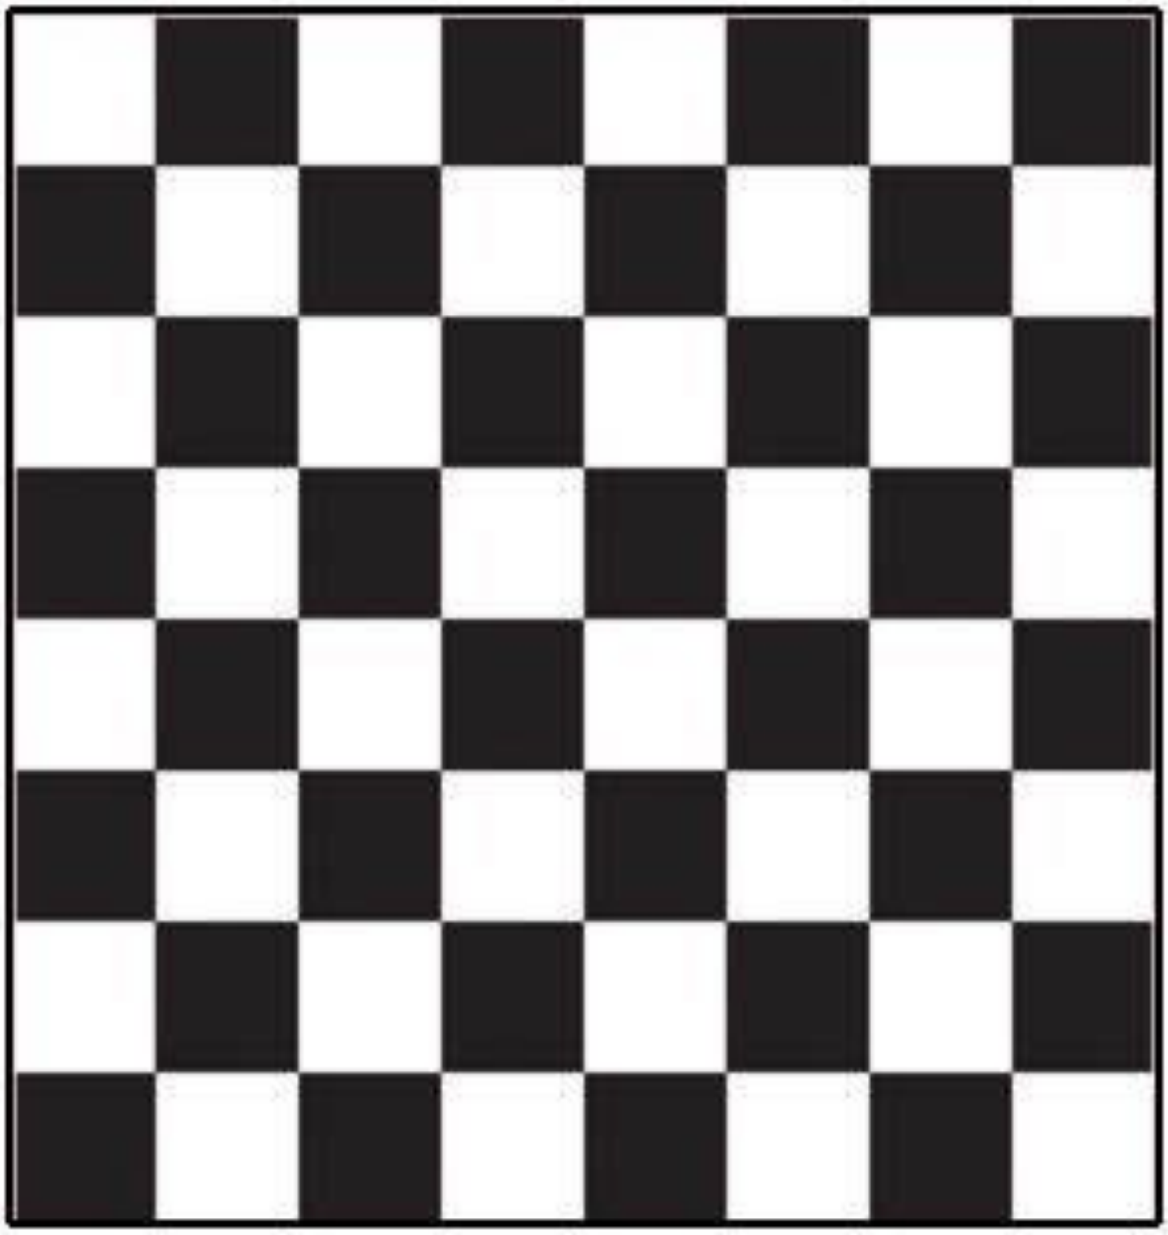

3. Have the cut out chess pieces and board be glued together in any way you wish, just as long as you use all the pieces.
4. Using HTML table tag create a 8 x 8 chess board

Hints :

a. use <table border = “2” width = “100%” height = “100%”>
b. you need approximately 8 <tr> </tr> and
c. inside every <tr> </tr> there are 8 <td> </td>
d. you will need colors on the board be default it is only black and white but you can customize it using your own colors (use <td bgcolor = “black”> </td> <td bgcolor = “white”> </td>)
e. lastly by using your created layout add the images to the exact table data(<td>) by using <img src>

- Set names for the cutouts
- Like b_king.jpg (black king) or W_king(w_king.jpg)
- Use your naming conventions and yes even tagalog names are allowed

f. all cutouts and HTML codes should be submitted with this module(in case the code is too long you may use an extra bond paper)

Applying CSS

There are three ways to apply CSS to HTML: **Inline**, **internal**, and **external**.

Inline

Inline styles are plonked straight into the HTML tags using the style attribute.

They look something like this:

```
<p style="color: red">text</p>
```

This will make that specific paragraph red.

But, if you remember, the best-practice approach is that the HTML should be a stand-alone, **presentation free** document, and so in-line styles should be avoided wherever possible.

Internal

Embedded, or internal, styles are used for the whole page. Inside the head element, the style tags surround all of the styles for the page.

```
<!DOCTYPE html>
<html>
<head>
<title>CSS Example</title>
<style>
   p {
      color: red;
   }

   a {
      color: blue;
   }

</style>
...
```

This will make all of the paragraphs in the page red and all of the links blue.

Although preferable to soiling our HTML with inline presentation, it is similarly usually preferable to keep the HTML and the CSS files separate, and so we are left with our savior…

External

External styles are used for the whole, multiple-page website. There is a **separate CSS file**, which will simply look something like:

```
p {
   color: red;
}

a {
   color: blue;
}
```

If this file is saved as “style.css” in the same directory as your HTML page then it can be linked to in the HTML like this:

```
<!DOCTYPE html>
<html>
<head>
   <title>CSS Example</title>
   <link rel="stylesheet" href="style.css">
...
```

Apply!

To get the most from this guide, it would be a good idea to try out the code as we go along, so start a fresh new file with your text-editor and save the blank document as “style.css” in the same directory as your HTML file.

Now change your HTML file so that it starts something like this:

```
<!DOCTYPE html>
<html>
<head>
   <title>My first web page</title>
   <link rel="stylesheet" href="style.css">
</head>
...
```

Save the HTML file. This now links to the CSS file, which is empty at the moment, so won’t change a thing. As you work your way through the CSS Beginner Tutorial, you will be able to add to and change the CSS file and see the results by simply refreshing the browser window that has the HTML file in it, as we did before.

Selectors, Properties, and Values

Whereas HTML has **tags**, CSS has **selectors**. Selectors are the names given to styles in internal and external style sheets. In this CSS Beginner Tutorial we will be concentrating on **HTML selectors**, which are simply the names of HTML tags and are used to change the style of a specific type of element.

For each selector there are “**properties**” inside **curly brackets**, which simply take the form of words such as color, font-weight or background-color.

A **value** is given to the property following a **colon** (NOT an “equals” sign). **Semi-colons** are used to separate the properties.

```
body {
   font-size: 14px;
   color: navy;
}
```

This will apply the given values to the font-size and color properties to the body selector.

So basically, when this is applied to an HTML document, text between the body tags (which is the content of the whole window) will be 14 pixels in size and navy in color.

Lengths and Percentages

There are many property-specific units for values used in CSS, but there are some general units that are used by a number of properties and it is worth familiarizing yourself with these before continuing.

- px (such as font-size: 12px) is the unit for pixels.
- em (such as font-size: 2em) is the unit for the calculated size of a font. So "2em", for example, is two times the current font size.
- pt (such as font-size: 12pt) is the unit for points, for measurements typically in printed media.
- % (such as width: 80%) is the unit for… wait for it… percentages.

Other units include pc (picas), cm (centimeters), mm (millimeters) and in (inches).When a value is **zero**, you do not need to state a unit. For example, if you wanted to specify no border, it would be border: 0."px" in this case, doesn't actually necessarily mean pixels - the little squares that make up a computer's display - all of the time. Modern browsers allow users to zoom in and out of a page so that, even if you specify font-size: 12px, or height: 200px, for example, although these will be the genuine specified size on a non-zoomed browser, they will still increase and decrease in size with the user's preference. It's a good thing. Trust me.

Colors

CSS brings **16,777,216** colors to your disposal. They can take the form of a **name**, an **RGB** (red/green/blue) value or a **hex** code.

The following values, to specify full-on as red-as-red-can-be, all produce the same result:

- red
- rgb(255,0,0)
- rgb(100%,0%,0%)
- #ff0000
- #f00

Predefined color names include aqua, black, blue, fuchsia, gray, green, lime, maroon, navy, olive, purple, red , silver, teal, white, and yellow. transparent is also a valid value.
With the possible exception of black and white, color names have limited use in a modern, well-designed web sites because they are so specific and limiting.

The three values in the RGB value are from 0 to 255, 0 being the lowest level (no red, for example), 255 being the highest level (full red, for example). These values can also be a percentage.

Hexadecimal (previously and more accurately known as "**sexadecimal**") is a **base-16** number system. We are generally used to the **decimal** number system (**base-10**, from 0 to 9), but hexadecimal has 16 digits, from 0 to f.

The hex number is prefixed with a hash character (**#**) and can be three or six digits in length. Basically, the three-digit version is a compressed version of the six-digit (#ff0000 becomes #f00, #cc9966 becomes #c96, etc.). The three-digit version is easier to decipher (the first digit, like the first value in RGB, is red, the second green and the third blue) but the six-digit version gives you more control over the exact color. CSS3, the latest version of CSS, also allows you to define **HSL** colors — hue, saturation and lightness. More on this, along with semi-transparent colors, can be found in the CSS Advanced Tutorial.

color and background-color

Colors can be applied by using color and background-color (note that this must be the American English "color" and not "colour").

A blue background and yellow text could look like this:

```
h1 {
    color: yellow;
    background-color: blue;
}
```

These colors might be a little too harsh, so you could change the code of your CSS file for slightly different shades:

```
body {
    font-size: 14px;
    color: navy;
}

h1 {
    color: #ffc;
    background-color: #009;
}
```

Save the CSS file and refresh your browser. You will see the colors of the first heading (the h1 element) have changed to yellow and blue.

You can apply the color and background-color properties to most HTML elements, including body, which will change the colors of the page and everything in it.

Example 1:

```
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8"> <title>Colors</title>
<style>
body { font: 100 1.5em Helvetica, Arial, sans-serif; color: white;
background-color: black; } #p1 { color: #f83333; background-color:
#444; } #p2 { color: rgb(0,255,127); background-color:
rgba(50%,50%,0%,0.5); } #p3 { color: hsl(240,100%,75%); background-
color: hsla(0,0%,100%,0.2); }
</style>
</head>
<body>
<h1>Colors</h1>
<p>CSS color values can take <a
href="/references/css/values/color/">one of several forms</a>.</p>
<p>This page's body is set to color: white; background-color:
black;</p> <p id="p1">This paragraph is set to color: #f83333;
background-color: #444;</p>
<p id="p2">This paragraph is set to color: rgb(0,127,255);
background-color: rgba(0%,50%,50%,0.5);</p> <p id="p3">This
paragraph is set to color: hsl(240,100%,75%); background-color:
hsla(0,0%,100%,0.2);</p> <!-- Link back to HTML Dog: --> <p><a
href="http://www.htmldog.com/examples/"><img
src="http://www.htmldog.com/badge1.gif" alt="HTML Dog"></a></p>
</body>
</html>
```

Text

You can alter the size and shape of the text on a web page with a range of properties.

font-family

This is the font itself, such as Times New Roman, Arial, or Verdana.

The user's browser has to be able to find the font you specify, which, in most cases, means it needs to be on **their** computer so there is little point in using obscure fonts that are only sitting on **your** computer. There are a select few "**safe**" fonts (the most commonly used are Arial, Verdana and Times New Roman), but you can specify more than one font, separated by **commas**. The purpose of this is that if the user does not have the first font you specify, the browser will go through the list until it finds one it does have. This is useful because different computers sometimes have different fonts

installed. So font-family: arial, helvetica, serif, will look for the Arial font first and, if the browser can't find it, it will search for Helvetica, and then a common serif font.

Note: if the name of a font is more than one word, it should be put in quotation marks, such as font-family: "Times New Roman".

You can use a wider selection than the "safe" fonts using several methods outlined in the CSS Advanced Tutorial but if you're just getting to grips with CSS, we suggest sticking with this basic standard approach for the moment.

font-size

font-size sets the size of the font. Be careful with this — text such as headings should not just be an HTML paragraph (p) in a large font - you should still use headings (h1, h2 etc.) even though, in practice, you could make the font-size of a paragraph larger than that of a heading (not recommended for sensible people).

font-weight

font-weight states whether the text is bold or not. Most commonly this is used as font-weight: bold or font-weight: normal but other values are bolder, lighter, 100, 200, 300, 400 (same as normal), 500, 600, 700 (same as bold), 800 or 900.

font-weight: bold

font-style: italic

FONT-VARIANT: SMALL-CAPS

TEXT-TRANSFORM: UPPERCASE

font-weight, font-style, font-variant, and text-transform.
Play around with these font-weight values if you want see their effect but, keep in mind, that some older browsers become a little confused with anything other than bold and normal so we suggest sticking to those unless you're a typography ninja.

What Is It

Instructions:

1. Get one colored paper (preferably black) 😉
2. Using what you learned from the precious lesson interpret the given html/css codes and write them in your colored paper
3. The correct format will be included in your correction key but try to be honest and try as hard as you can to finish this exercise before consulting the answe

What I Have Learned

Instructions: On the provided sheet below write down the HTML / CSS code for the given output

1. **Output 1**

HTML / CSS Code

2. Output 2

HTML / CSS Code

What I Can Do

Instructions:

1. Get 8 colored sheet of paper
2. Namely Red, Blue, Yellow, Green, Gray, Orange, Violet, Pink
3. Using the code below generate the output using the colored papers you have
4. Use a Bond paper and paste to create your output

```html
<!DOCTYPE html>
<html>
<body>

<h1 style="background-color:red;">red</h1>
<h1 style="background-color:blue;">blue</h1>
<h1 style="background-color:yellow;">yellow</h1>
<h1 style="background-color:green;">green</h1>
<h1 style="background-color:Gray;">Gray</h1>
<h1 style="background-color:orange;">orange</h1>
<h1 style="background-color:Violet;">Violet</h1>
<h1 style="background-color:pink;">Pink</h1>

</body>
</html>
```

Assessment Rubrics:

	WOW	**RIGHT ON**	**GETTING THERE**	**JUST BEGINNING**
Ideas and Content	Rich detail, creative and original	Good detail, generally creative	Some basic detail, attempts to be creative	Limited detail, little creativity or originality
Language and Word Choice	The language is exceptionally sensory. The reader can feel, taste, see, or hear the poem throughout. • The language is "cut to the bone," leaving only the necessary or powerful. Each word is carefully chosen to enhance the poem.	The language is often sensory. The reader can often feel, taste, see, or hear the poem. • The language is generally "cut to the bone," mostly leaving only the necessary or powerful. For the most part, words are carefully chosen to enhance the poem.	• The language is sometimes sensory. The reader can sometimes feel, taste, see, or hear the poem. • The language is somewhat "cut to the bone." Some unnecessary or ineffective words or phrases are included. • Some attempt has been made to choose some words for effect	• Sensory language is limited. The reader had difficulty feeling, tasting, seeing, or hearing the poem. • Many unclear, unnecessary or ineffective words or phrases are included • Little attempt has been made to choose words for effect or inappropriate word choices.

			may not be appropriate.	
Punctuation and Spelling	• Punctuation enhances conveyance of thoughts and images. • Rarely any spelling errors	• Punctuation is meaningful throughout. • Few minor spelling errors.	• Some meaningful punctuation. • Several minor spelling errors.	• Arbitrary punctuation. • Several major spelling errors.

Adaptedfrom:https://etfoassessment.ca/media/intermediate/rubrics/14_FreeVersePoetryRubric_About.pdf

Directions: Fill in the circle of the letter that corresponds to the correct answer.

Which of these elements are all <table> elements?

- <table><tr><td>
- <table><tr><tt>
- <table><head><tfoot>
- <thead><body><tr>

Question 12 of 40:

Inline elements are normally displayed without starting a new line.

- True
- False

How can you make a numbered list?

- <list>
- <ol>
- <dl>
- <ul>

How can you make a bulleted list?

- <list>
- <ol>
- <dl>
- <ul>

What is the correct HTML for inserting an image?

- <image src="image.gif" alt="MyImage">
- <img href="image.gif" alt="MyImage">
- <img alt="MyImage">image.gif</img>
- <img src="image.gif" alt="MyImage">

What is the correct HTML for inserting a background image?

- <body style="background-image:url(background.gif)">
- <background img="background.gif">
- <body bg="background.gif">

Which HTML attribute specifies an alternate text for an image, if the image cannot be displayed?

- src
- alt
- longdesc
- title

Which doctype is correct for HTML5?

- <!DOCTYPE HTML5>
- <!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 5.0//EN" "http://www.w3.org/TR/html5/strict.dtd">
- <!DOCTYPE html>

What does CSS stand for?

- Creative Style Sheets
- Computer Style Sheets
- Cascading Style Sheets
- Colorful Style Sheets

Where in an HTML document is the correct place to refer to an external style sheet?

- At the end of the document
- In the <body> section
- In the <head> section

Which HTML tag is used to define an internal style sheet?

- <style>
- <css>
- <script>

Which is the correct CSS syntax?

- body {color: black;}
- {body:color=black;}
- body:color=black;
- {body;color:black;}

If you have internet connection try to read or get any materials on HTML forms as our next topic

https://www.w3schools.com/css/css_form.asp

Answer Key

red

blue

yellow

green

Gray

orange

Violet

Pink

```html
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-color: pink;
  color: red;
}

h1 {
  background-color: green;
  color: yellow;
}
</style>
</head>
<body>

<h1>this is the second exercise</h1>
<p>I hope your getting use to CSS.</p>
<p>and appreciate HTML 5.</p>

</body>
</html>
```

Colors

CSS color values can take one of several forms.

This page's body is set to color: white; background-color: black;

This paragraph is set to color: #f83333; background-color: #444;

This paragraph is set to color: rgb(0,127,255); background-color: rgba(0%,50%,50%,0.5);

This paragraph is set to color: hsl(240,100%,75%); background-color: hsla(0,0%,100%,0.2);

```html
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-color: lightgrey;
  color: blue;
}

h1 {
  background-color: black;
  color: white;
}
</style>
</head>
<body>

<h1>This Heading is Black with White Text</h1>
<p>This page has a grey background color and a blue text.</p>
<p>Another paragraph.</p>

</body>
</html>
```

Assessment	Guess What	**What's In**
1. C 2. B 3. A 4. D 5. B 6. B 7. C 8. A 9. D 10. C 11. A 12. B 13. A 14. B 15. A	1. blushing 1. Cackled 2. Acrid 3. Delectable 4. bumpy	1. C 2. A 3. B 4. C 5. A 6. D 7. C 8. C 9. D 10. A 11. A 12. D 13. A 14. A 15. C

References

1. http://www.w3schools.com/html
2. htmldog.com