















- Slim and Low profile (60mm)
- · Fanless and conduction-cooled design
- · Built-in active PFC function
- -30~+70°C working temperature
- · Output voltage and constant current level programmable
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in remote ON-OFF control
- · DC OK active signal
- Operating altitude up to 5000 meter (Note.8)
- · LED indicator for power on
- Optional PMBus or CANBus protocol
- 5 years warranty











Applications

- Industrial automation machinery
- Industrial control system
- · Mechanical and electrical equipment
- · Electronic instruments, equipment or apparatus
- Test and measurement instrument
- · Laser related machine
- · Charging related equipment
- · Household appliances
- Power Sourcing Equipment of PoE (48V model: DC O/P range 48~57.6V)


GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

UHP-2500 series is a 2500W single-output slim type power supply with 60mm of low profile design. Adopting the full range 90~264VAC input, the entire series provides an output voltage line of 24V, 36V and 48V. In addition to the high efficiency up to 96%, that the whole series operates from -30° ~ 70° under air convection without fan. UHP-2500 has the complete protection functions and 2G anti-vibration capability; It is complied with the international safety regulations such as TUV BS EN/EN62368-1, UL62368-1. UHP-2500 series serves as a high performance power supply solution for various industrial applications.

Model Encoding



Type	Communication Protocol	Note
Blank	None	In Stock
PM	PMBus protocol	By request
CAN	CANBus protocol	By request



SPECIFICATION

SPECIFIC.	ATION	I		I		
MODEL		UHP-2500-24	UHP-2500-36	UHP-2500-48		
	DC VOLTAGE	24V	36V	48V		
	RATED CURRENT	104.2A	69.4A	52.1A		
	RATED POWER	2500.8W	2498.4W	2500.8W		
	RIPPLE & NOISE (max.) Note.2	2 300mVp-p	360mVp-p	480mVp-p		
OUTPUT	VOLTAGE ADJ. RANGE	By built-in potentiometer, SVR				
OUIFUI	VOLIAGE ADJ. KANGE	24~28.8V	36~43.2V	48~57.6V		
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%		
	LINE REGULATION	±0.5%	±0.5%	±0.5%		
	LOAD REGULATION	±1.0%	±1.0%	±0.5%		
	SETUP, RISE TIME Note.4	1800ms, 60ms/230VAC 1800ms, 60m	ns/115VAC at full load			
	HOLD UP TIME (Typ.) Note.4	16ms/230VAC at 75% load 10ms/23	16ms/230VAC at 75% load 10ms/230VAC at full load; 16ms/115VAC at 75% load 10ms/115VAC at full load			
	VOLTAGE RANGE Note.4	90 ~ 264VAC 250 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	POWER FACTOR (Typ.) Note.4	PF≥0.95/230VAC PF≥0.99/115VAC at full load				
NPUT	EFFICIENCY (Typ.)	95%	95.5%	96%		
	AC CURRENT (Typ.)	15A/115VAC 14.3A/230VAC				
	INRUSH CURRENT (Typ.)	Cold start 30A/115VAC 60A/230VA	C			
	LEAKAGE CURRENT	<0.75mA / 240VAC				
		105 ~ 115% rated current				
	OVERLOAD	Protection type : Constant current limiting	, shut down O/P voltage after 5 sec. After O/I	P voltage falls, re-power on to recover		
PROTECTION		30 ~ 35V	45 ~ 51V	60 ~ 67V		
	OVER VOLTAGE	Protection type :Shut down O/P voltage,re	e-power on to recover			
	OVER TEMPERATURE	71	recovers automatically after temperature goe	s down		
	OUTPUT VOLTAGE		, , ,	o domi		
	PROGRAMMABLE(PV) Note 5	Adjustment of output voltage is allowable to 50 ~ 120% of nominal output voltage Please refer to the Function Manual.				
	OUTPUT CURRENT	Adjustment of constant current level is allowable to 20 ~ 100% of rated current.				
FUNCTION	PROGRAMMABLE(PC) Note	Please refer to the Function Manual.				
	REMOTE ON/OFF CONTROL	Power ON: Short circuit Power OF				
	AUXILIARY POWER	12V@0.4A tolerance±10%, ripple 150mVp-p				
	DC-OK SIGNAL	The TTL signal out, PSU turn on = $4.5 \sim 5.5 \text{V}$; PSU turn off = $-0.5 \sim 0.5 \text{V}$. Please refer to the Function Manual.				
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
ENVIRONMENT	STORAGE TEMP., HUMIDITY	$-40 \sim +85^{\circ}$ C, $10 \sim 95\%$ RH non-condensing				
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. ea	ich along X, Y, Z axes			
	SAFETY STANDARDS	UL62368-1, Dekra seal BS EN/EN62368-1, EAC TP TC 004 approved				
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.25KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG,O/P-FG:100M Ohms/500VDC/25°C/ 70%RH				
		Parameter	Standard	Test Level / Note		
		Conducted	BS EN/EN55032 (CISPR32)	Class B		
	EMC EMISSION	Radiated	BS EN/EN55032 (CISPR32)	Class A		
		Harmonic Current	BS EN/EN61000-3-2	Class A		
SAFETY &		Voltage Flicker	BS EN/EN61000-3-3			
EMC		BS EN/EN55035, BS EN/EN61000-6-2				
(Note.7)		Parameter	Standard	Test Level / Note		
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact		
		Radiated	BS EN/EN61000-4-3	Level 3		
	ENG INMALINITY	EFT / Burst	BS EN/EN61000-4-4	Level 3		
	EMC IMMUNITY	Surge	BS EN/EN61000-6-2	2KV/Line-Line 4KV/Line-Earth		
		Conducted	BS EN/EN61000-4-6	Level 3		
		Magnetic Field	BS EN/EN61000-4-8	Level 4		
		•				
		Voltage Dips and Interruptions	BS EN/EN61000-4-11			
	MTRF			>95% interruptions 250 periods		
OTHERS	MTBF	493.9K hrs min. Telcordia SR-332 (Be	BS EN/EN61000-4-11 llcore); 48.9K hrs min. MIL-HDBK-217F (2	<u> </u>		
OTHERS	MTBF DIMENSION PACKING			>95% interruptions 250 periods		

- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance includes set up tolerance, line regulation and load regulation.
- 4. Derating may be needed under low input voltages. Please check the derating curve and Static characteristics for more details.
- 5. PV/PC functions when users do not use SVR.
- 6. Output will shut down after O/P voltage is below < 80% of Vset for 5 sec, re-power on to recover.
- 7. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 1100mm*650mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."

 (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)

 8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 9. Please contact MEAN WELL technical staff to confirm that the product and the water-cooling system match the relevant specifications.
- ※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx




■ BLOCK DIAGRAM PFC fosc: 80KHz PWM fosc: 55KHz RECTIFIERS RECTIFIERS POWER EMI FILTER I/P o & PFC & FILTER **SWITCHING** O.V.P. DETECTION CIRCUIT PFC CONTROL PWM CONTROL o PC O.T.P. MCU DETECTION CIRCUIT - DC OK DATA ISOLATION MCU Remote ON-OFF O.T.P. PM BUS DATA ISOLATION or CAN BUS RECTIFIERS o 5V AUX POWER o 12V/0.4A & FILTER AUX POWER (Optional) **■ STATIC CHARACTERISTIC** ■ EFFICIENCY VS LOAD (48V MODEL) 100 100 95 90 90 **EFFICIENCY (%)** 80 LOAD (%) 80 70 75 230VAC 70 50 65 100% 10% 40% 60% 90% 180 220 240 120 160 200 100 LOAD INPUT VOLTAGE (V) 60Hz **■** DERATING CURVE 230VAC 100 Input only 230VAC 230VAC LOAD (%) LOAD (%) 60 50 110VAC 40 40 30 20 20 (HORIZONTAL) AMBIENT TEMPERATURE WITH ADDITIONAL ALUMINUM PLATE(°C) AMBIENT TEMPERATURE WITH 45CFM FAN(°C) (450x450x3mm) 100 100 230VAC Input only 80 LOAD (%) LOAD (%) 60 40 40 30 20 20 -10 0 20 40 45 50 (HORIZONTAL) -30 -25 -10 15 30 50 60 75 (HORIZONTAL) AMBIENT TEMPERATURE WITHOUT ALUMINUM PLATE(°C) Tcase (°C)





■ FUNCTION MANUAL

1.Output Voltage Programming (or, PV / remote voltage programming / remote adjust / margin programming / dynamic voltage trim)

※ In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed by applying EXTERNAL VOLTAGE.








O The rated current should change with the Output Voltage Programming accordingly.


2. Constant Current Programming (or, PC / remote current programming / dynamic current trim)


※ The output current can be trimmed to 20~100% of the rated current by applying EXTERNAL VOLTAGE.



- \bigcirc Output will shut down after O/P voltage is below < 80% of Vset for 5 sec, re-power on to recover.


T2(Typ.): T1+5°C.





3.Remote ON-OFF Control


The power supply can be turned ON/OFF individually or along with other units in parallel by using the "Remote ON-OFF" function.



Remote ON-OFF	Power Supply Status	
Short circuit	ON	
Open circuit	OFF	

4.DC-OK Signal

DC-OK signal is a TTL level signal. The maximum sourcing current is 10mA.




DC-OK signal	Power Supply Status
"High" >4.5~5.5V	ON
"Low" <-0.5~0.5V	OFF

5.PMBus Communication Interface

UHP-2500 supports PMBus Rev. 1.2 with maximum 100KHz bus speed, allowing information reading, status monitoring, output trimming, etc. For details, please refer to the Function Manual.

2500W Conduction Cooling with PFC Switching Supply

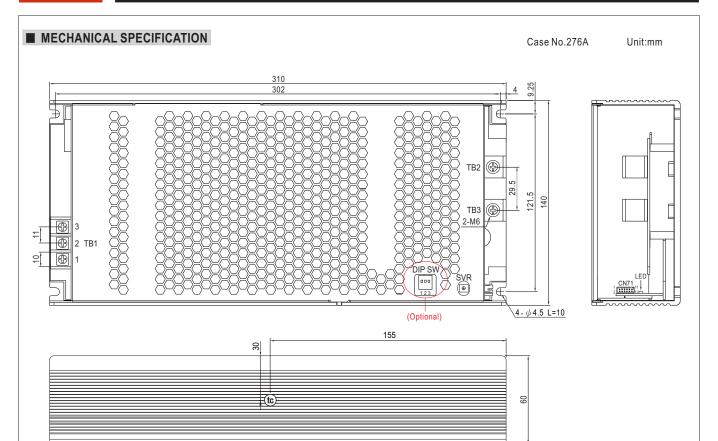

• tc : Max. Case Temperature

AC Input Terminal(TB1) Pin NO. Assignment

Pin No.	Assignment	Terminal	Max mounting torque
1	AC/L		
2	AC/N	DECAT36	18Kgf-cm
3	누		

DC Output Terminal(TB2,TB3) Pin NO. Assignment

	Pin No.	Assignment	Terminal	Max mounting torque
I	TB2	+V	(MW)	
	TB3	-V	HS147	8Kgf-cm

※DIP SW(Optional):

, ,		
Pin No.	Function	Description
1	A0	
2	A1	PMBus / CANBus interface address switch.
3	A2	

 $\label{lem:control} \ref{thm:control} \textbf{% Control Pin No. Assignment (CN71): HRS DF11-12DP-2DS or equivalent}$



Mating Housing	HRS DF11-12DS or equivalent	
Terminal	HRS DF11-**SC or equivalent	


Pin No.	Function	Description	
1	PV	Connection for output voltage programming.(Note1)	
2	PC	Connection for constant current level programming.(Note.1)	
3,4	GND (Signal)	Negative output voltage signal.	
5	Remote	The unit can turn the output ON/OFF by dry contact between Remote ON/OFF and 12-AUX.(Note.2)	
5	ON-OFF	Short (10.8 ~ 13.2V): Power ON; Open(-0.5 ~ 0.5V): Power OFF; The maximum input voltage is 13.2V	
		Low (-0.5 ~ 0.5V): When the Vout \leq 77% \pm 6%.	
6	DC-OK	High (4.5 ~ 5.5V): When Vout \geq 80% \pm 6%.	
		The maximum sourcing current is 10mA and only for output.(Note.2)	
7,8	+12V-AUX	Auxiliary voltage output, 10.8~13.2V, referenced to GND-AUX (pin3 & 4).	
7,0		The maximum load current is 0.4A. This output is not controlled by "Remote ON-OFF".	
9,10	GND-AUX	Auxiliary voltage output GND.	
9,10	GND-AUX	The signal return is isolated from the output terminals (+V & -V).	
11	SDA	For PMBus model: Serial Data used in the PMBus interface. (Note.2)	
11	CANH	For CANBus model: Data line used in CANBus interface. (Note.2)	
12	SCL	For PMBus model: Serial Clock used in the PMBus interface. (Note.2)	
12	CANL	For CANBus model: Data line used in CANBus interface. (Note.2)	

Note1: Non-isolated signal, referenced to [GND(signal)]. Note2: Isolated signal, referenced to GND-AUX.



1. Operate with additional aluminum plate and fan


In order to meet the "Derating Curve" and the "Static Characteristics", UHP-2500 series can be installed onto an aluminum plate(or the cabinet of the same size) on the bottom or apply forced air cooled solution. The size of the suggested aluminum plate and configuration of fan are shown as below. And for optimizing thermal performance, the aluminum plate must have an even and smooth surface (or coated with thermal grease), and UHP-2500 series must be firmly mounted at the center of the aluminum plate.

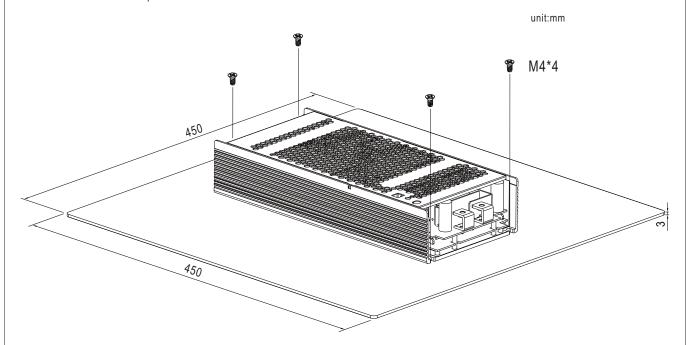


2. Suitable for conduction cooling

Inlet temperature: 25° C Flow rate (minimum): 1 LPM

If optional cold plate is in need, please contact MEAN WELL for details.

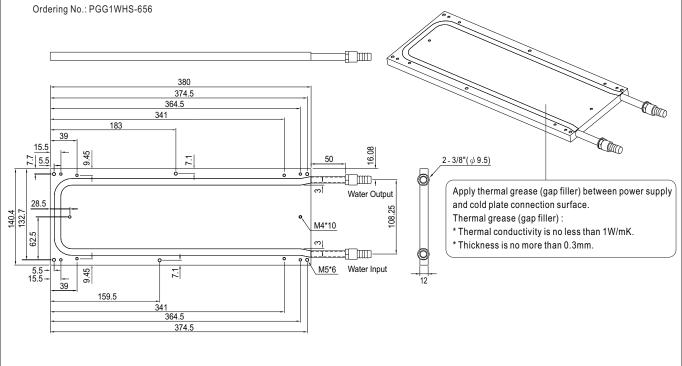



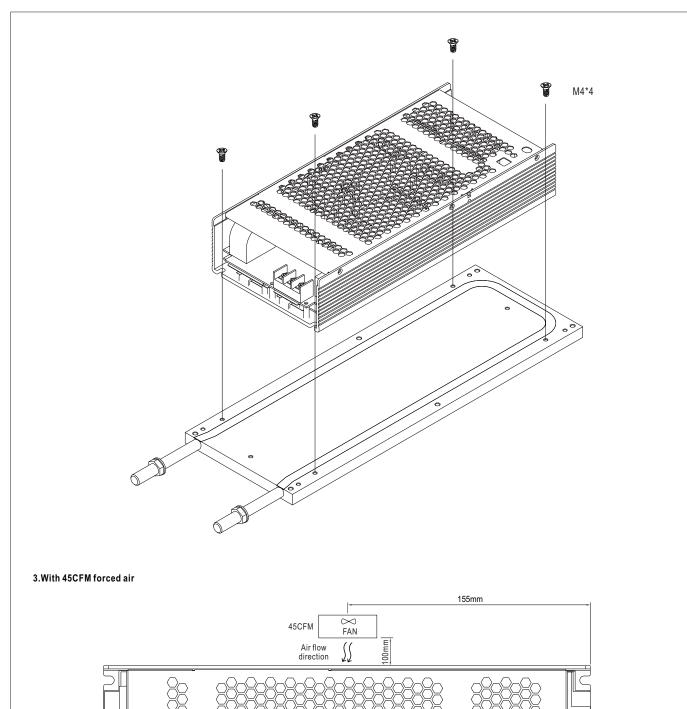

тв2

твз 📳

(Optional)