



Argon PWR UPS 27W PD for RPi 5 10000mAh

Product Datasheet

Product Name	Argon PWR UPS 27W PD for RPi 5 10000mAh
Product Model	A24-011-PWR-UPS-AR-10000
EAN / UPC	5065019946225
Data Sheet Version	Rev 1 (build v1)
Date	18 August 2026
Argon 40 SKU	ARG-PWR-UPS-10K

Overview

27W UPS (Uninterruptible Power Supply) for Raspberry Pi 5 with a 10,000 mAh battery. Provides clean power delivery and battery backup, protecting against power outages. USB-C PD 27W output.

1. Application

- Raspberry Pi 5

Product Features


- 10,000 mAh battery capacity
- USB-C Power Delivery 27W output
- USB-A 5V auxiliary output port
- Smart fuel gauge with calibration
- Battery level indicator LEDs with check button
- ON/OFF switch with status monitoring
- Included Argon E-marker USB-C cable
- Accepts 5V 18W to 45W input power
- FCC and ETL certified

2. Product Specifications

- **Weight (kg):** 0.515
- **Dimensions (cm):** 230 x 137 x 39 cm
- **HTS code:** 8504.40.7001
- **battery_capacity:** 10,000 mAh
- **battery_capacity_models:** 5000mAh, 10000mAh
- **battery_check_button:** Yes
- **battery_level_indicator:** LED
- **certifications:** FCC, ETL
- **compatible_devices:** Argon NEO 5, Argon ONE V5, Raspberry Pi 4, Raspberry Pi 5, Argon ONE V3, Argon NEO, Argon POLY+, Argon POLY+5
- **dimensions_note:** [TODO: Verify physical dimensions]
- **fcc_certificate_reference:** 23EP10114F02, FCC Part 15
- **included_cable:** Argon E-marker USB-C cable
- **input_usb_c_minimum:** 5V 18W
- **input_usb_c_optimal:** 45W PD
- **input_usb_c_recommended:** 27W PD

- **led_indicators:** Battery level LEDs
- **minimum_psu_wattage:** 5V 18W
- **model_number:** A24-011-PWR-UPS-AR-10000
- **not_supported_devices:** Argon ONE V2, Raspberry Pi Zero, Raspberry Pi Zero W
- **on_off_switch:** Yes, with status monitoring
- **optimal_psu_wattage:** 45W PD
- **output_usb_a:** 5V
- **output_usb_c_pd:** 27W
- **power_input:** USB-C Power Delivery
- **power_output:** USB-C 5V, USB-A 5V
- **primary_compatible_device:** Raspberry Pi 5 (bare board)
- **product_family:** PWR PD
- **product_name:** Argon PWR UPS 27W PD
- **recommended_psu_wattage:** 27W PD
- **sku:** ARG-PWR-UPS-10K
- **smart_fuel_gauge:** Yes, with calibration capability
- **supported_devices:** Bare Raspberry Pi 4, Bare Raspberry Pi 5, Argon ONE V3, Argon ONE V5, Argon NEO, Argon NEO 5, Argon POLY+, Argon POLY+5
- **upc_ean:** 5065019946225
- **usb_a_output:** 5V
- **usb_c_input_minimum:** 5V 18W
- **usb_c_input_optimal:** 45W PD
- **usb_c_input_recommended:** 27W PD
- **usb_c_output_pd:** 27W USB-C Power Delivery
- **weight:** 515 g

3. Mechanical Information and Functional Diagram

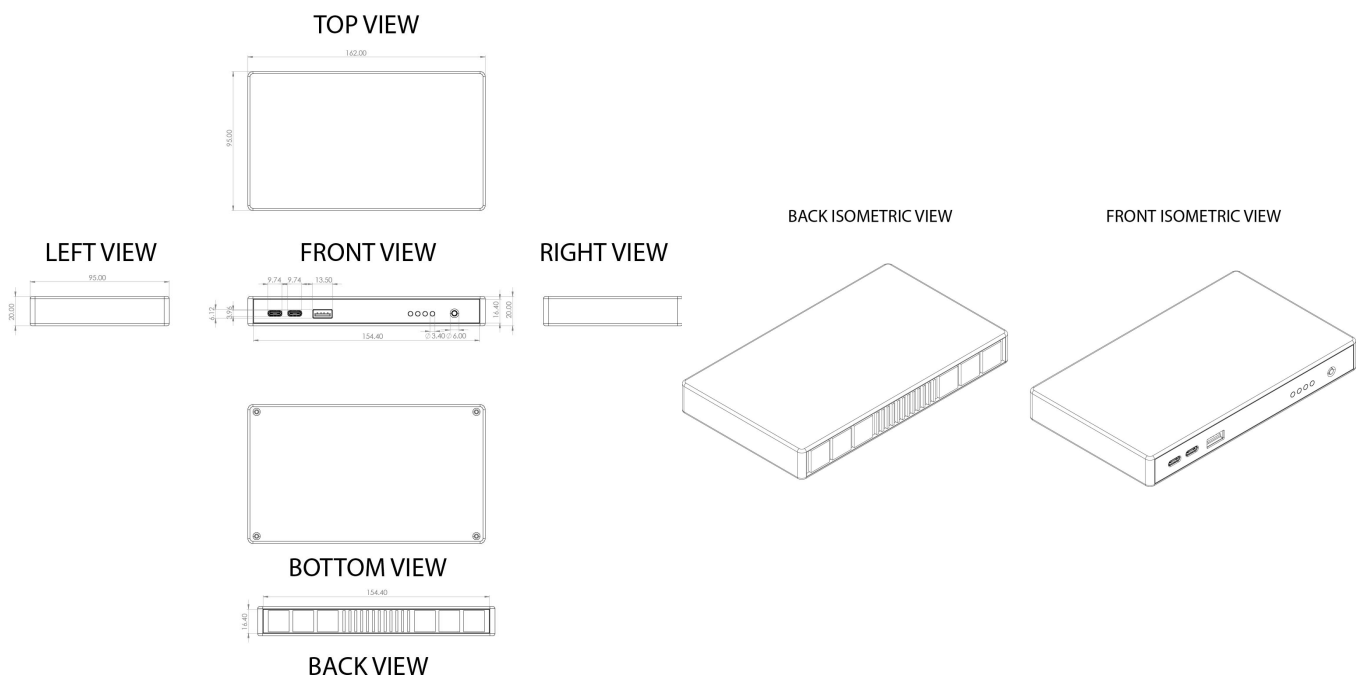

Illustration(s) reused from the existing marketing datasheet on file.

4. Reference Design

- (Electronics Schematics)

5. Product Compliance Information

- This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment)
- FCC

6. Contact Information

Website: <https://www.argon40.com>

Email: support@argon40.com

Document Control

Document version	v1
Product revision	rev 1
Generated	2026-08-18 11:16 UTC
Content hash	4c96ebd84334
Revision record	datasheets/ARG-PWR-UPS-10K/version-log.json (document_version = 1)

Full revision history for this datasheet is recorded in **[version-log.json](#)** — see the entry where *document_version* = 1.